

SPU 1312-06 Multischalter Stand-Alone/Kaskadenbaustein | 13 in 12 | basic-line



- ✓ For up to 12 subscribers
- ✓ Subscriber ports SAT active, terrestrial passive
- ✓ Suitable for return path
- ✓ Powered by ext. power supply SZU 99-06 (not included in delivery) or via the SAT-IF trunk lines
- ✓ Cascadable - Cascade outputs must be terminated with DC-isolated 75 Ohm terminating resistors (e.g. CFA 11-00, not included in delivery)

Order information

Type	SPU 1312-06
Order no.	SPU131206
GTIN	7611682005448
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs

Number	13
Frequency range	5...862 MHz 950...2400 MHz
Max. LNB current	1500 mA
Isolation V H.	>30 dB
Isolation TERR SAT	30 dB

Subscriber ports

Number	12
Switch commands	13/18 V, 0/22 kHz, DiSEqC 1.0
Tap loss TERR	28 dB ±3 dB
Tap loss SAT	3...0 dB ±2 dB
Max. output level SAT (3rd order SAT EN 50083 3 35dB KMA, 2 sender test method)	102 dBμV
Current consumption per port (without LNB supply)	< 35 mA

Trunk outputs

Number	13
Through loss TERR	2...5 dB ±1.5 dB
Through loss SAT	1...3 dB ±1.5 dB


Connectors

Connector type	F
----------------	---

General

Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	291 x 189 x 63 mm
Weight	0.910 kg
Protection class	IP 20

Example of use

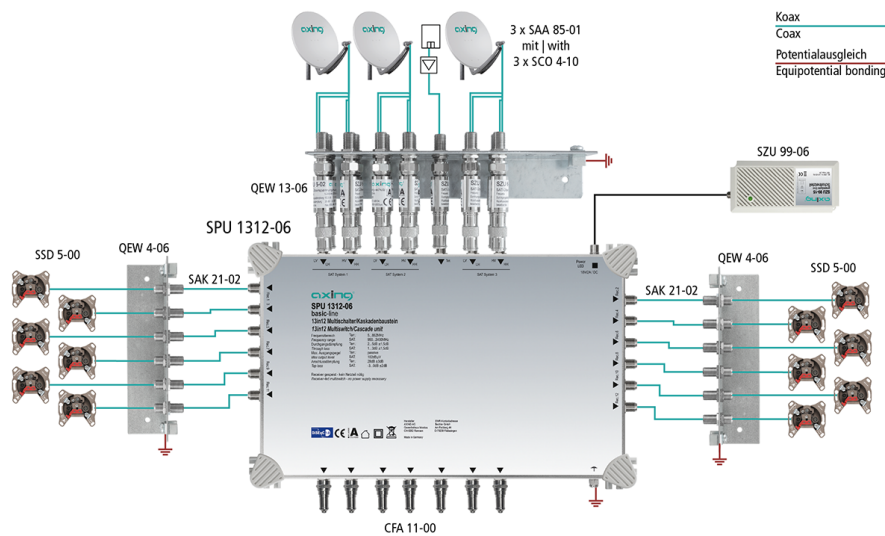

Suitable products

QEW 13-06 Earthing angle | two-rowed | surge protection

QEW 6-06 Earthing angle | single-rowed

SAK 21-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m

SAK 41-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m

CFA 11-00 Terminating resistor | 75 Ohm | DC isolated

CFA 4-01 Adapter F/F | Quickfix