

SPU 532-06 Multiswitch stand-alone/cascade unit | 5 in 32 | basic-line



- ✓ For up to 32 subscribers
- ✓ Subscriber ports SAT active, terrestrial passive
- ✓ Suitable for return path
- ✓ Receiver-fed multiswitch – no power supply necessary
- ✓ Cascadable - Cascade outputs must be terminated with DC-isolated 75 Ohm terminating resistors (e.g. CFA 11-00, not included in the scope of delivery)

Order information

Type	SPU 532-06
Order no.	SPU53206
GTIN	7611682005370
PE	1
VE	1
EU customs tariff number	85291095




Technical data

Inputs	
Number	5
Frequency range	5...862 MHz 950...2400 MHz
Max. LNB current	1500 mA
Isolation V H.	>30 dB
Isolation TERR SAT	30 dB
Subscriber ports	
Number	32
Switch commands	13/18 V, 0/22 kHz
Tap loss TERR	33 dB ±3 dB
Tap loss SAT	2...-1 dB ±2 dB
Max. output level SAT (3rd order SAT EN 50083-3 35dB KMA, 2 sender test method)	102 dBµV
Current consumption per port (without LNB supply)	< 35 mA
Trunk outputs	
Number	5
Through loss TERR	2 dB ±2 dB
Through loss SAT	2...6 dB ±2 dB
Connectors	
Connector type	F
General	
Equipotential bonding connection	4 mm²

Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	137 x 240 x 63 mm
Weight	0.750 kg
Protection class	IP 20

Example of use

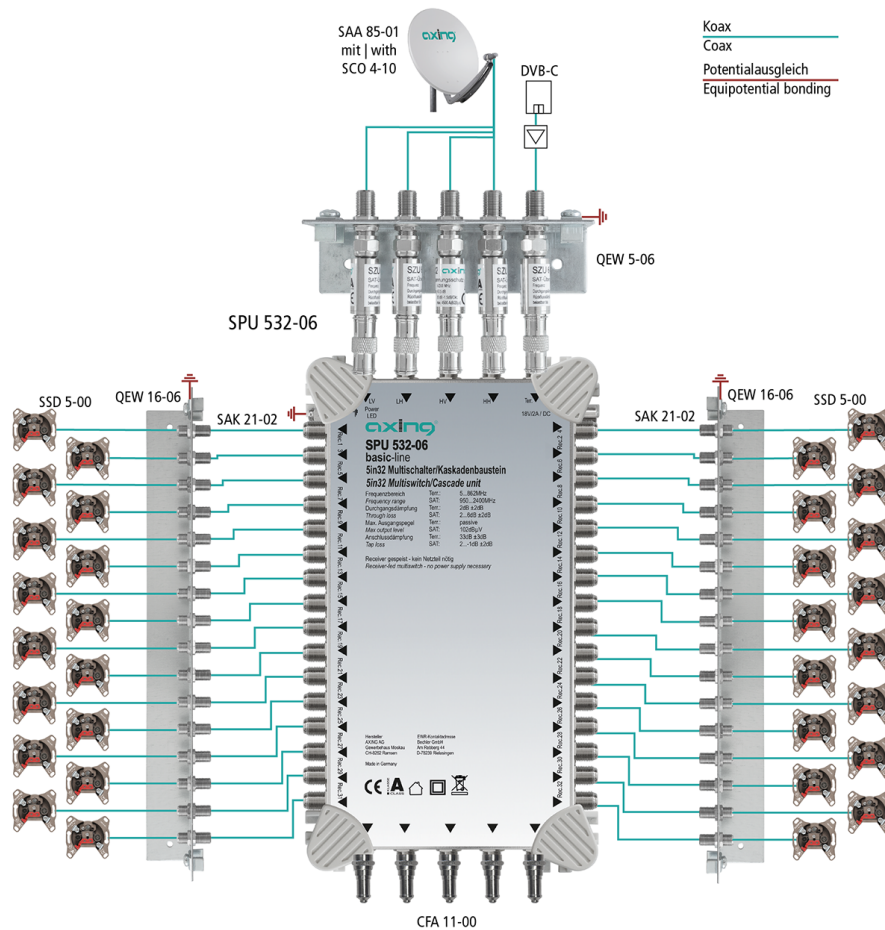

Suitable products

- SZU 99-06 Switching mode power supply 18 V= / 2 A
- QEW 5-06 Earthing angle | single-rowed | surge protection
- QEW 16-06 Earthing angle | single-rowed
- SAK 21-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m
- SAK 41-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m
- CFA 11-00 Terminating resistor | 75 Ohm | DC isolated
- CFA 4-01 Adapter F/F | Quickfix