

Data sheet

OpDAT PF patch panel unequipped for 24xST-S, gray

Page 1/5

P/N

1502000100-E


EAN 4250184108115

2018-27-02

Illustrations



Dimensional drawing

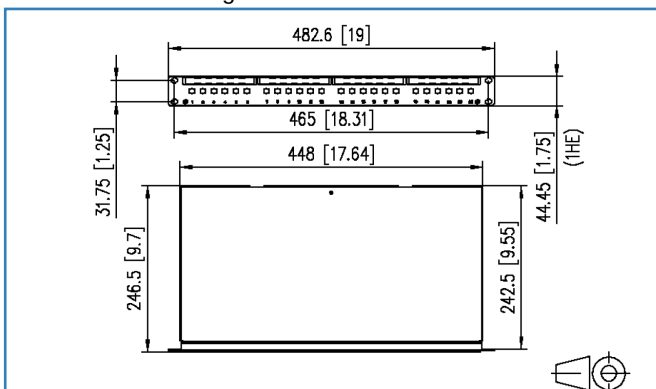

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- unequipped
- light construction with aluminum front plate and housing
- removable front plate for easy adapter mounting
- 10 possible cable entries in the rear panel for 4x PG13.5, 2x PG16/M20 or 2x PG21/M25 cable glands and for two pre-terminated installation cables (VIK)
- snap-on cover for easy access during service work
- label windows for enclosed identification labels
- accepts up to 4 splice trays and 1 splice tray cover

variants

24x LC-D

12x SC-D

24x ST

suitable cutouts

LC-D, SC simplex, E2000 simplex

SC-D, LC-Q

ST



Data sheet

Page 2/5

OpDAT PF patch panel unequipped for 24xST-S, gray

P/N

1502000100-E

EAN 4250184108115

2018-27-02

Technical Data

General Data

Fields of application

Office

Data center

Design

patch panel

Color

anodized alu.

Dimensions

Dimension (L x W x H)

246.50 x 482.60 x 44.45 mm

Dimension (W x H)

19.00 x 1.75 in.

Inches

19 inches

Height unit

1RU

Labeling option

label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1

ST

Number of ports interface 1

24

Number of equipped ports interface 1

0

Connector technology interface 2

ST

Number of ports interface 2

24

Number of ports interface 2 equipped

0

Cable sheath diameter (min. - max.)

Cable sheath diameter

3.00 - 20.00 mm

Cable sheath diameter

0.118 - 0.787 in.

Cable access/outlet

several possibilities for cable entry on the back

Mechanical characteristics

Cut-out

ST

strain relief

cable tie

Materials and material properties

Material - Housing

Al (Aluminium)

Material - Front cover

Al (Aluminium)

Material - Front cover finish

anodized

Material - Cover

Al (Aluminium)



Data sheet

OpDAT PF patch panel unequipped for 24xST-S, gray

Page 3/5

P/N

1502000100-E

EAN 4250184108115

2018-27-02

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C -40 - 70 °C

Temperature - Storage °F -40 - 158 °F

Temperature - Operating °C -40 - 70 °C

Temperature - Operating °F -40 - 158 °F

Approvals

RoHS compliant

Classifications

ETIM 5.0 EC001130

ETIM 6.0 EC001130

Packing details

Type of packaging 1 pc(s) / box

Packaging unit - Weight (gram) 1670.00 g

Packaging unit - Weight (pound) 3.68 lb

Packaging dimension (W x H x D) 523.00 x 361.00 x 45.00 mm

Packaging dimension (W x H x D) 20.591 x 14.213 x 1.772 in.



Data sheet

Page 4/5

**OpDAT PF patch panel unequipped
for 24xST-S, gray**

P/N

1502000100-E

EAN 4250184108115

2018-27-02

Accessories

P/N	Designation
15090001-I	OpDAT ST adapter SM+MM (metallike)
1509010000-E	OpDAT splice tray for 12 splices unequipped
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels
15090031-I	OpDAT ST adapter MM (Ph-Br, metallike)
15090001-100	OpDAT ST adapter SM+MM (metallike) - 100 pieces



P | Cabling

Data sheet

OpDAT PF patch panel unequipped for 24xST-S, gray

Page 5/5

P/N

1502000100-E

EAN 4250184108115

2018-27-02

Illustrations

Dimensional drawing

