

Data sheet

OpDAT PA patch panel VIK
12xLC-D (lime green), OM5, gray

Page 1/4


P/N
1502207M12-E
 EAN 4251394607306

2018-03-01

Illustrations



Dimensional drawing

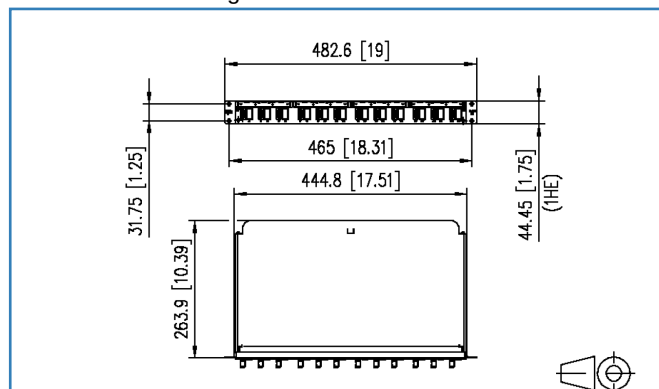

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover
- equipped with LC-D adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light aluminum construction
- unused cutouts are closed by blank plugs
- splice tray of withdrawable patch panel tilts and is completely removable to facilitate fitting (end stop)
- variable cable entry (straight / inclined) from both sides possible
- cable arrest with supplied cable tie or optional cable screw gland also possible
- cable diameter from 3 to 20 mm
- strain relief for central element / Kevlar
- cable management by means of freely positionable guide elements
- screwless cover
- label windows for enclosed identification labels
- variants: equipped with 6, 12 or 24 LC-D adapters, all blue (OS2), lime green (OM5), violet (OM4) or aqua (OM3) or with 6, 12 or 24 LC-D APC adapters, all green (OS2)



P | Cabling

Data sheet

OpDAT PA patch panel VIK 12xLC-D (lime green), OM5, gray

Page 2/4

P/N
1502207M12-E
EAN 4251394607306

2018-03-01

Technical Data

General Data

Fields of application

	Office
	Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	lime green
Dimensions	
Dimension (L x W x H)	263.90 x 482.60 x 44.45 mm
Dimension (W x H)	19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	265.00 mm
Fiber class	OM5: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.4
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1	LC-D Couplers
Connector technology interface 2	LC-D Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12
Number of blind covers interface 2	12
Cable access/outlet	variable, straight / inclined, from both sides possible



Data sheet

Page 3/4

OpDAT PA patch panel VIK 12xLC-D (lime green), OM5, gray

P/N

1502207M12-E

EAN 4251394607306

2018-03-01

Technical Data

Mechanical characteristics

Cut-out	SC, LC-D, E2000
Connector type	Duplex
strain relief	cable tie

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-20
----------------------------------	-----------------

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	580.00 x 405.00 x 70.00 mm
Packaging dimension (W x H x D)	22.835 x 15.945 x 2.756 in.



Illustrations

Dimensional drawing

