

## Data sheet

**OpDAT PA patch panel VIK**  
**12xSC-D (lime green), OM5, gray**

Page 1/4


P/N  
**150220BM12-E**  
**EAN 4251394607313**

2017-05-12

## Illustrations



Dimensional drawing

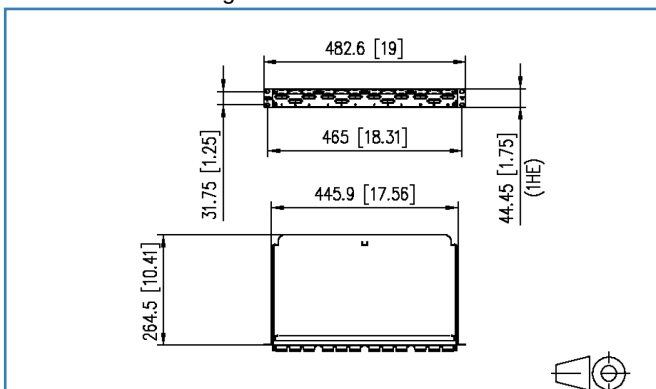

See enlarged drawings at the end of document

## Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover
- splice tray can be tilted and completely removed to facilitate fitting (end stop)
- light aluminum construction
- equipped with SC-D couplers
- unused cutouts are closed by blank plugs
- variable cable entry (straight / inclined) from both sides possible
- cable arrest with supplied cable tie or optional cable screw gland also possible
- cable management by cable guides to be positioned as required
- screwless cover
- label window for enclosed identification labels
- variants: equipped with 6, 12 or 24 SC-D adapters, all blue (OS2), lime green (OM5), heather violet (OM4) or aqua (OM3) or with 6, 12 or 24 SC-D APC adapters, all green (OS2)



## Data sheet

### OpDAT PA patch panel VIK 12xSC-D (lime green), OM5, gray

Page 2/4

P/N  
150220BM12-E  
EAN 4251394607313

2017-05-12

## Technical Data

### General Data

#### Fields of application

|                         |                                                                   |
|-------------------------|-------------------------------------------------------------------|
|                         | Office                                                            |
|                         | Data center                                                       |
| Design                  | patch panel                                                       |
| Mounting style          | 1RU                                                               |
| Transmission technology | Fiber optic                                                       |
| Port numbering          | yes                                                               |
| Color                   | lime green                                                        |
| Dimensions              |                                                                   |
| Dimension (L x W x H)   | 264.50 x 482.60 x 44.45 mm                                        |
| Dimension (W x H)       | 19.00 x 1.75 in.                                                  |
| Inches                  | 19 inches                                                         |
| Height unit             | 1RU                                                               |
| Installation depth      | 265.00 mm                                                         |
| Fiber class             | OM5: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.4 |
| Mode type of the fiber  | Multimode                                                         |
| Fiber construction      | 50/125 µm                                                         |
| Labeling option         | printed numbers                                                   |

### Connections/interfaces

|                                                  |                                                         |
|--------------------------------------------------|---------------------------------------------------------|
| Connector technology interface 1                 | SC-D Couplers                                           |
| Connector technology interface 2                 | SC-D Couplers                                           |
| Number of ports interface 1                      | 24                                                      |
| Number of ports interface 2                      | 24                                                      |
| Number of equipped ports interface 1             | 12                                                      |
| Number of ports interface 2 equipped             | 12                                                      |
| Number of ports with dust protection interface 1 | 12                                                      |
| Number of ports with dust protection interface 2 | 12                                                      |
| Number of blind covers interface 2               | 12                                                      |
| Cable access/outlet                              | variable, straight / inclined, from both sides possible |



## Data sheet

Page 3/4

## OpDAT PA patch panel VIK 12xSC-D (lime green), OM5, gray

P/N  
150220BM12-E  
EAN 4251394607313

2017-05-12

### Technical Data

#### Mechanical characteristics

|                                |                  |
|--------------------------------|------------------|
| Cut-out                        | SC-D, LC-Q, ST-D |
| Connector type                 | Duplex           |
| Life - Number of mating cycles | min. 1000        |

#### Materials and material properties

|                            |                  |
|----------------------------|------------------|
| Material - Housing         | Al (Aluminium)   |
| Material - Front cover     | Al (Aluminium)   |
| Material - Sleeve          | ceramic, slotted |
| Material - Coupler housing | Plastics         |

#### Approvals

|      |           |
|------|-----------|
| RoHS | compliant |
|------|-----------|

#### The product meets the following standards

|                                  |                |
|----------------------------------|----------------|
| Fibre optic connector interfaces | DIN EN 61754-4 |
|----------------------------------|----------------|

#### Packing details

|                   |               |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|



# P | Cabling

## Data sheet

**OpDAT PA patch panel VIK**  
**12xSC-D (lime green), OM5, gray**

Page 4/4

P/N  
**150220BM12-E**  
**EAN 4251394607313**

2017-05-12

## Illustrations

### Dimensional drawing

