


● Introduction

Grade B is defined based on IEC 61753-1, which is stable with excellent random mating performance between each grade B connector. Grade B fiber patch cord (pigtail) is designed to meet large bandwidth and high speed requirements of the latest active optical equipment, allowing large streams of data to be transmitted reliably over long distances.

For grade B connectors, the axial misalignment of the two ferrules must be as small as possible. All the fiber cores must be adjusted and tuned into a defined zone to get low attenuation of random mating.

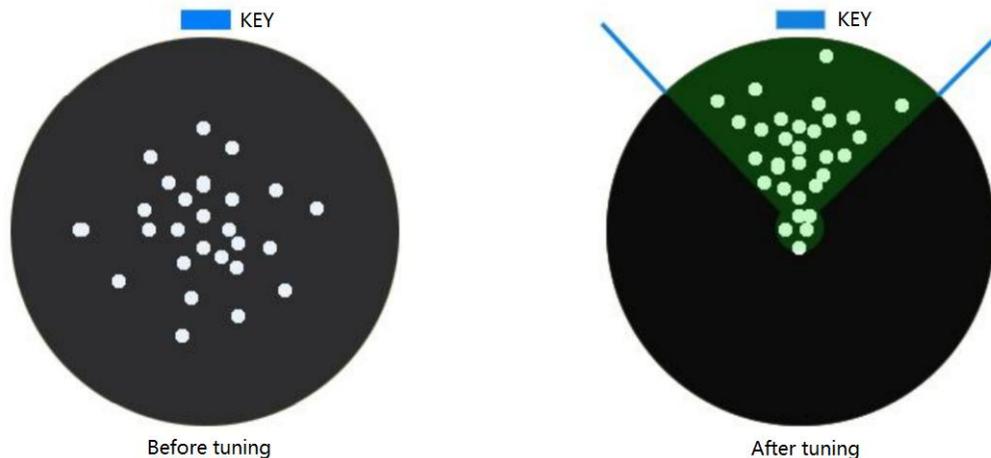

● Compliance

- IEC 61753-1
- IEC 61754
- IEC 61755-3
- IEC 61300-3

- **Insertion Loss Performance**

Attenuation Grade (IEC 61753-1:2018)	Random mated (IEC 61300-3-34:2009)	
A*	Not specified yet	
B	≤0.12 dB mean	≤0.25 dB max. for >97% of samples
C	≤0.25 dB mean	≤0.50 dB max. for >97% of samples
D	≤0.50 dB mean	≤0.10 dB max. for >97% of samples

- **Technical Specification**

Item	Condition	Description
Connector Type		LC /MU /SC /FC /Others
Polishing Type		UPC /APC /APC(9°)
Return loss (dB)		UPC≥50 /APC≥60
Wavelength (nm)		1310 /1550
Operation Temperature (°C)		-20~70
Storage Temperature (°C)		-40~85
Optical Fiber		G652D/G657A
Bend Radius (mm)	Dynamic	50
	Static	30 (G652D) /15 (G657A)
Fiber Attenuation (dB)	@1310nm	0.35
	@1550nm	0.2
Cable OD (mm)		0.6 /0.9 /1.6 /1.8 /2.0 /2.4 /3.0
Cable Jacket		PVC /LSZH / TPU /Others
Cable Colour		White /Yellow /Customized
Cable Length		TBC
Strengthen Member		Aramid Yarn /Others



- **Package**
 - Plastic Bag
 - Carton Box

