


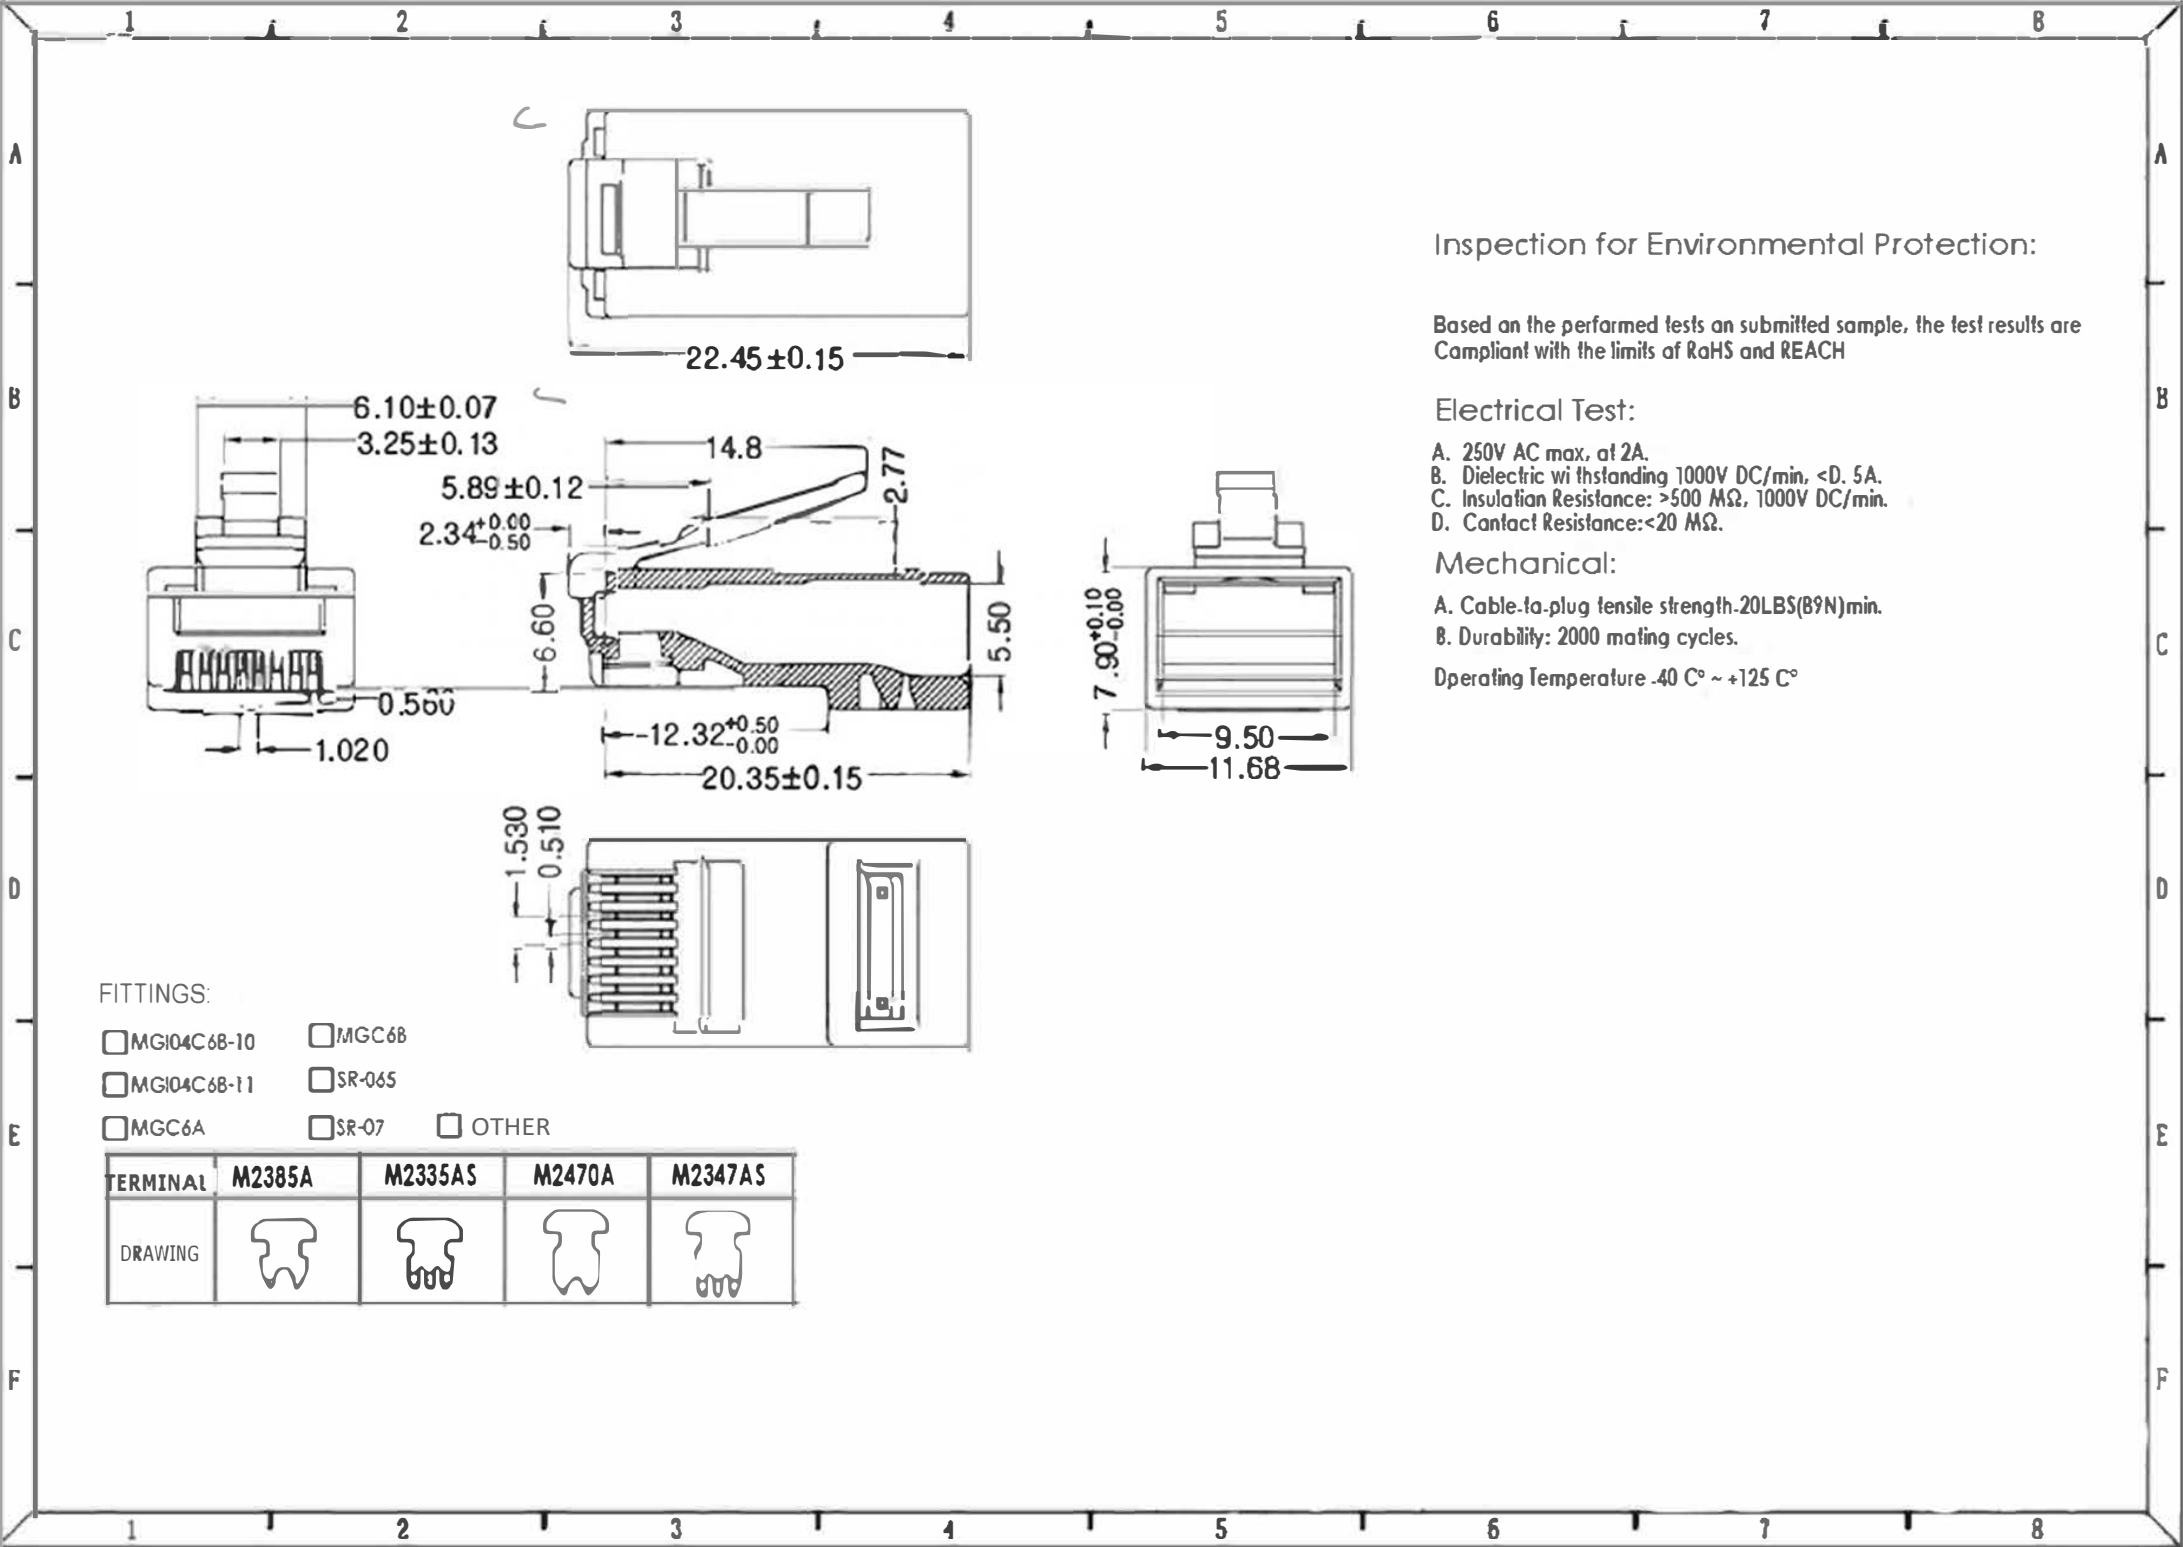

Inspection for Environmental Protection:

Based on the performed tests on submitted sample, the test results are Compliant with the limits of RoHS and REACH

Electrical Test:

- A. 250V AC max, at 2A.
- B. Dielectric withstanding 1000V DC/min, <D. 5A.
- C. Insulation Resistance: >500 MΩ, 1000V DC/min.
- D. Contact Resistance:<20 MΩ.

Mechanical:

- A. Cable-to-plug tensile strength-20LBS(89N)min.
 - B. Durability: 2000 mating cycles.
- Operating Temperature -40 C° ~ +125 C°

FITTINGS:

- ☐ MG104C6B-10
- ☐ MGC6B
- ☐ MG104C6B-11
- ☐ SR-065
- ☐ MGC6A
- ☐ SR-07
- ☐ OTHER

TERMINAL	M2385A	M2335AS	M2470A	M2347AS
DRAWING				