

Data sheet

Modul surface mount housing 8 port pure white, unequipped

Page 1/6

P/N


130861-0802-E

EAN 4250184132981


2020/06/10

Version: P


Illustrations

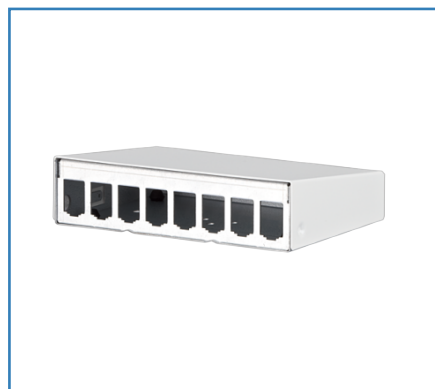

Dimensional drawing

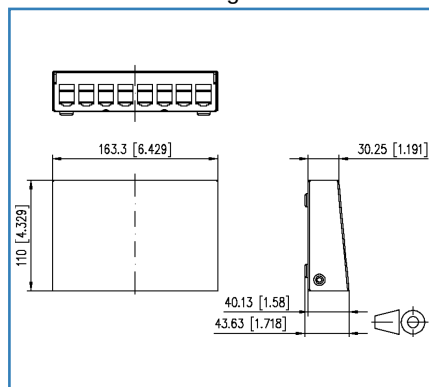

Cut-out

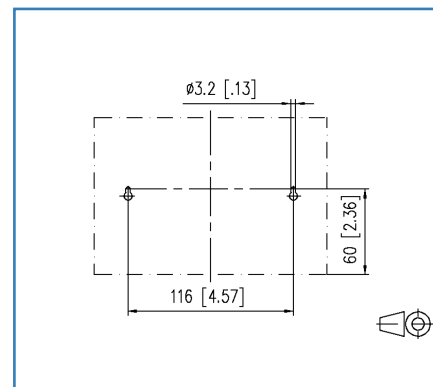

See enlarged drawings at the end of document

Product specification

- surface-mounted, unequipped module housing for individual modules in modul design
- solid steel sheet housing
- upper part of the housing powder-coated in RAL 9010
- upper part of the housing can be put on and removed easily because no screws are used for fastening
- equipotential bonding possible by means of contact pin
- additional strain relief on lower part of housing using cable ties
- suitable for direct wall mounting, as desktop device and for DIN-rail mounting using the DIN rail adapter mini FS
- bottom of the 3 port and 4 port housing can be removed. Additional fastening by means of 60 mm fastening clearance.
- optionally available and usable in all housings except 2 port: FO extension set for module and keystone surface mount housing: 130861-MSK-E
- optionally available 2x12 housing: Strain relief for patch cords 130861-24ZE-E
- variants: 2, 3, 4, 6, 8, 12, 16 and 2x12 ports



P | Cabling

Data sheet

Page 2/6

Modul surface mount housing 8 port pure white, unequipped

P/N

130861-0802-E

EAN 4250184132981

2020/06/10

Version: P

Technical Data

General Data

Fields of application	Office
Design	patch panel
Color	Pure white RAL 9010
Dimensions	
Dimension (L x W x H)	110 mm x 163.3 mm x 43.63 mm
Dimension (L x W x H)	4.331 in. x 6.429 in. x 1.718 in.
Modularity	yes

Connections/interfaces

Number of ports interface 1	8
Number of equipped ports interface 1	0
Number of ports interface 2	8
Number of ports interface 2 equipped	0

Mechanical data

Cut-out	module
strain relief	cable tie

Materials and material properties

Material - Housing	aluminium-zinc sheet
Material - Front cover	aluminium-zinc sheet
Material - Cover	steel
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F



P | Cabling

Data sheet

Page 3/6

Modul surface mount housing 8 port pure white, unequipped

P/N

130861-0802-E

EAN 4250184132981

2020/06/10

Version: P

Technical Data

Classifications

ETIM 5.0	EC001128
ETIM 6.0	EC001128
ETIM 7.0	EC002006

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	530 g
Packaging unit - Weight (pound)	1.17 lb
Packaging dimension (W x H x D)	190 mm x 135 mm x 55 mm
Packaging dimension (W x H x D)	7.48 in. x 5.315 in. x 2.165 in.

Modul surface mount housing 8 port pure white, unequipped

P/N

130861-0802-E

EAN 4250184132981

2020/06/10

Version: P

Accessories

P/N	Designation
130861-MSK-E	FO extension set for module and keystone surface mount housing
130910-I	E-DAT modul Cat.6 _A 8(8) jack, T568A
130910-I-B1	E-DAT modul Cat.6 _A 8(8) jack, T568B
130910-Z	E-DAT modul Cat.6 _A 8(8) jack, T568A (12 pcs)
1309A0-I	E-DAT modul Coupler 8(8) 180° Cat.6
130B11-25-E	25Gmodul
130B11-25-Z	25Gmodul (12 pcs)
130B11-E	C6 _A modul 180° jack
130B11-Z	C6 _A modul 180° jack (12 pcs)
15091001-I	OpDAT modul ST (ceramic, light gray) SM
15091071-I	OpDAT modul LC-D (ceramic, blue) SM
15091072-I	OpDAT modul LC-D (ceramic, aqua) MM
15091075-I	OpDAT modul LC-D (ceramic, violet) MM
15091076-I	OpDAT modul LC-D APC (ceramic, green) SM
1509107B-I	OpDAT modul LC-D (ceramic, beige) MM

P | Cabling

Data sheet

Page 5/6

Modul surface mount housing 8 port pure white, unequipped

P/N

130861-0802-E


EAN 4250184132981

2020/06/10


Version: P

Illustrations

Dimensional drawing

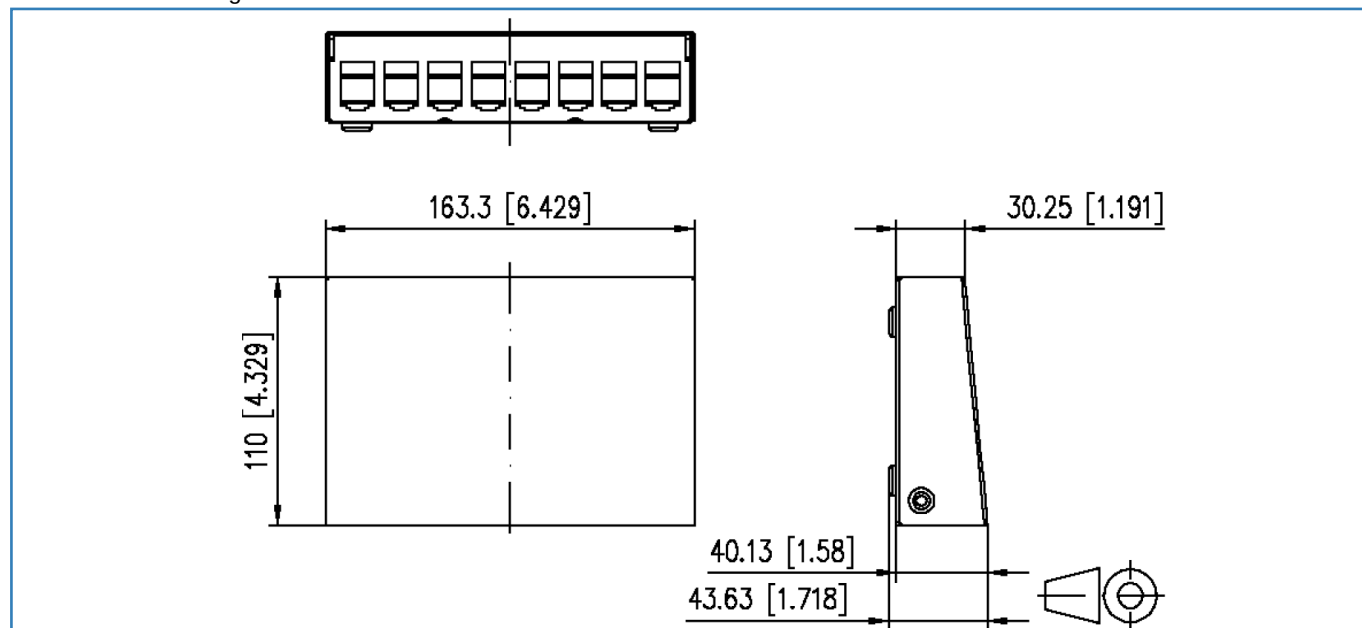

Cut-out

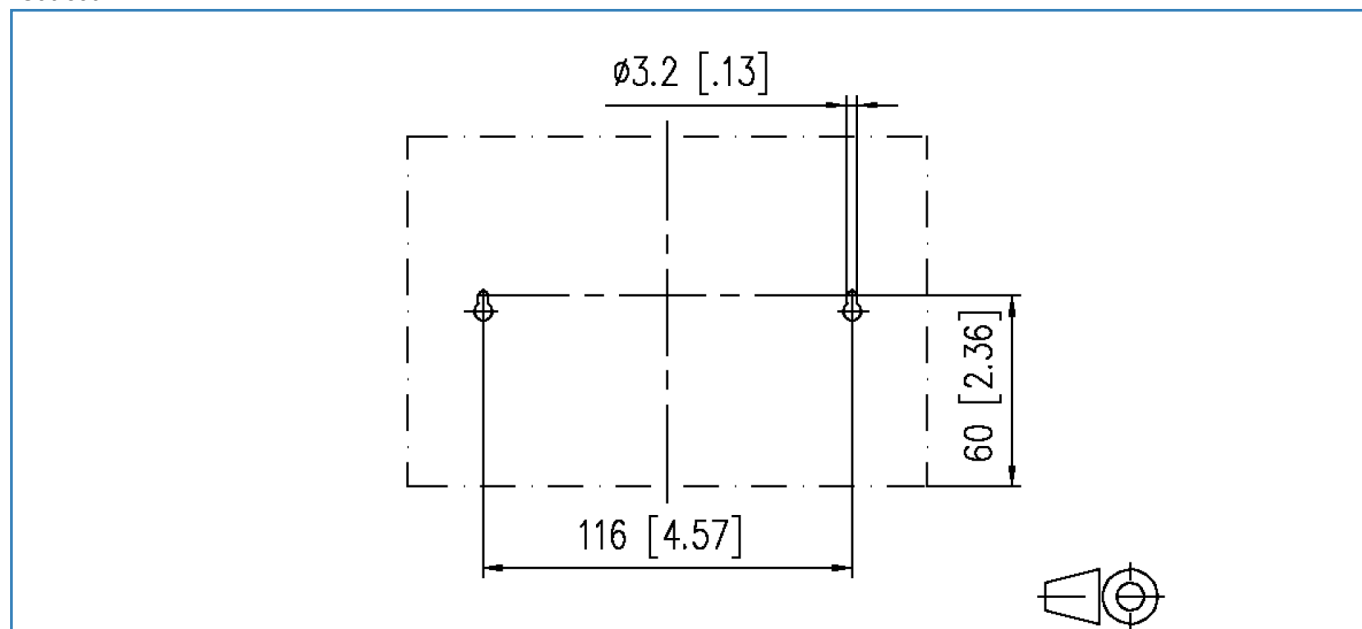

P | Cabling

Data sheet

Page 6/6

Modul surface mount housing 8 port pure white, unequipped

P/N

130861-0802-E

EAN 4250184132981

2020/06/10

Version: P

Illustrations

Cut-out

