


Patch Panel

Pre-terminated system

Description

- 1U support 8 or 6 copper cassettes
- Fitted with two screw to garanty the earting
- Ideal for pre-terminated installations
- Robust steel construction
- Including the grounding wire

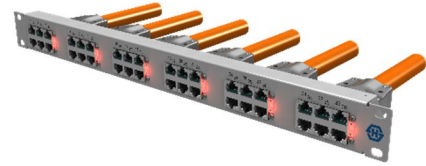

Technical data

Construction

Description	Values	Comment
Dimension (W x H x D)	483 x 43.6 x 35 mm	
Main construction	Metal	

Mechanical and environmental data

Characteristics	Values	Tested acc. to	Comment
Compliant with RoHS and REACH	Yes		
Protection class	IP20		
Temperature range	-40° C to +70° C		

Ordering information

Description	Item number	Comment
1 U high density panel for 6 copper Modules black	85088565	
1 U high density panel for 6 copper Modules grey	85091583	
1 U high density panel for 8 copper Modules black	85089761	
1 U high density panel for 8 copper Modules grey	85091584	
Blind plate	85089762	

Related documents

Description	Document number
None	

Additional information

Description	
Microsite for Data Center solution	datacenter.hubersuhner.com