

19" DYNAmic Basic

Free Standing Cabinets

Width: 600 mm
Depth: 600 mm

Load Capacity: 600 kgs.

**U Height: 22U, 26U, 32U
36U, 42U, 47U**

Standards and Compliances:



ISO 9001
Quality Management System

EN 61587-1
Mechanical Structures for
Electronic Equipment

EN IEC 60297, 19" Mounting
EN IEC 60917 Overall Cabinet
Dimensions

EN/IEC 60529 - IP20 Ingress Protection
performance

EN/IEC 62262 - IK07 Mechanical
Impact Resistance

EIA/ ECA-310 (D/E) 19" 482,6 mm
and U 44,45 mm Height Sizing



CE conform to
EN 60950-1
Information Technology
Equipment, Safety,
Part-1: General Requirement

EN IEC 62368-1 Audio/Video, Information
and Communication Technology
Equipment
Part 1: Safety requirements



UL listed to
UL 2416, Outline of Investigation for
Audio/Video, Information and
Communication Technology Equipment
Cabinet, Enclosure and Rack
Systems; UL 60950-1 and CSA C22.2
NO. 60950-1-07, Information Technology
Equipment Safety
Part 1: General Requirements



Environment Friendly;
ISO 14001 Environmental
Management System
RoHS compliancy
%100 Recyclable Material

Standard Color:



RAL 7035 Light Grey



RAL 9005 Black




DYNAmic Basic series Networking Enclosures, with 19" w:600 mm and d:600 mm physical sizes, with max internal usable depth and 6 different height, gives a wide selection for users.

19" DYNAmic Basic


Free Standing Cabinets

Width: 600 mm
Depth: 600 mm


Construction Drawings




Bottom view

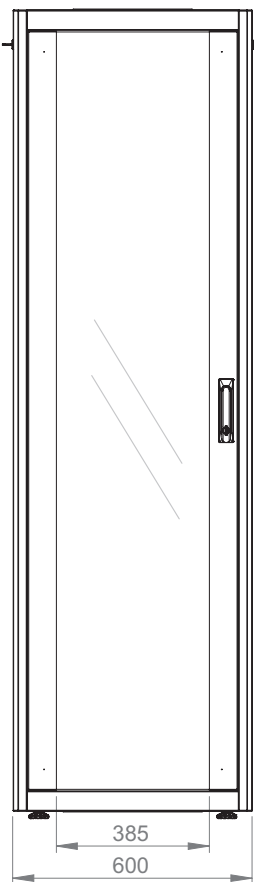


Front view

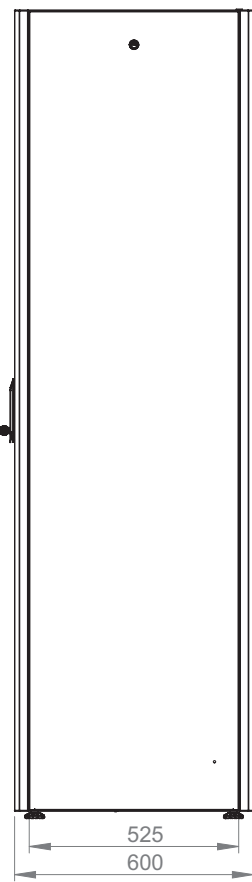

Side view

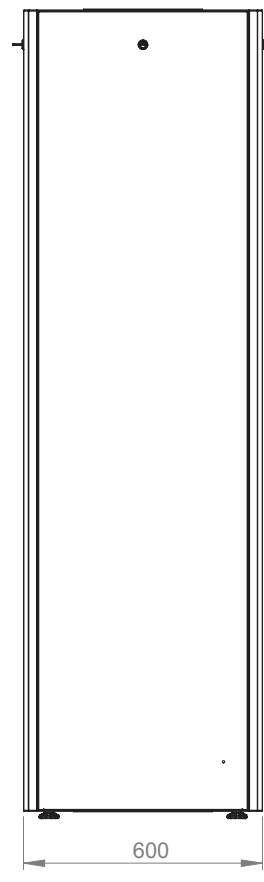

Rear view




Top view

19" DYNAmic Basic

Free Standing Cabinets

Width: 600 mm
Depth: 600 mm

Construction Drawings

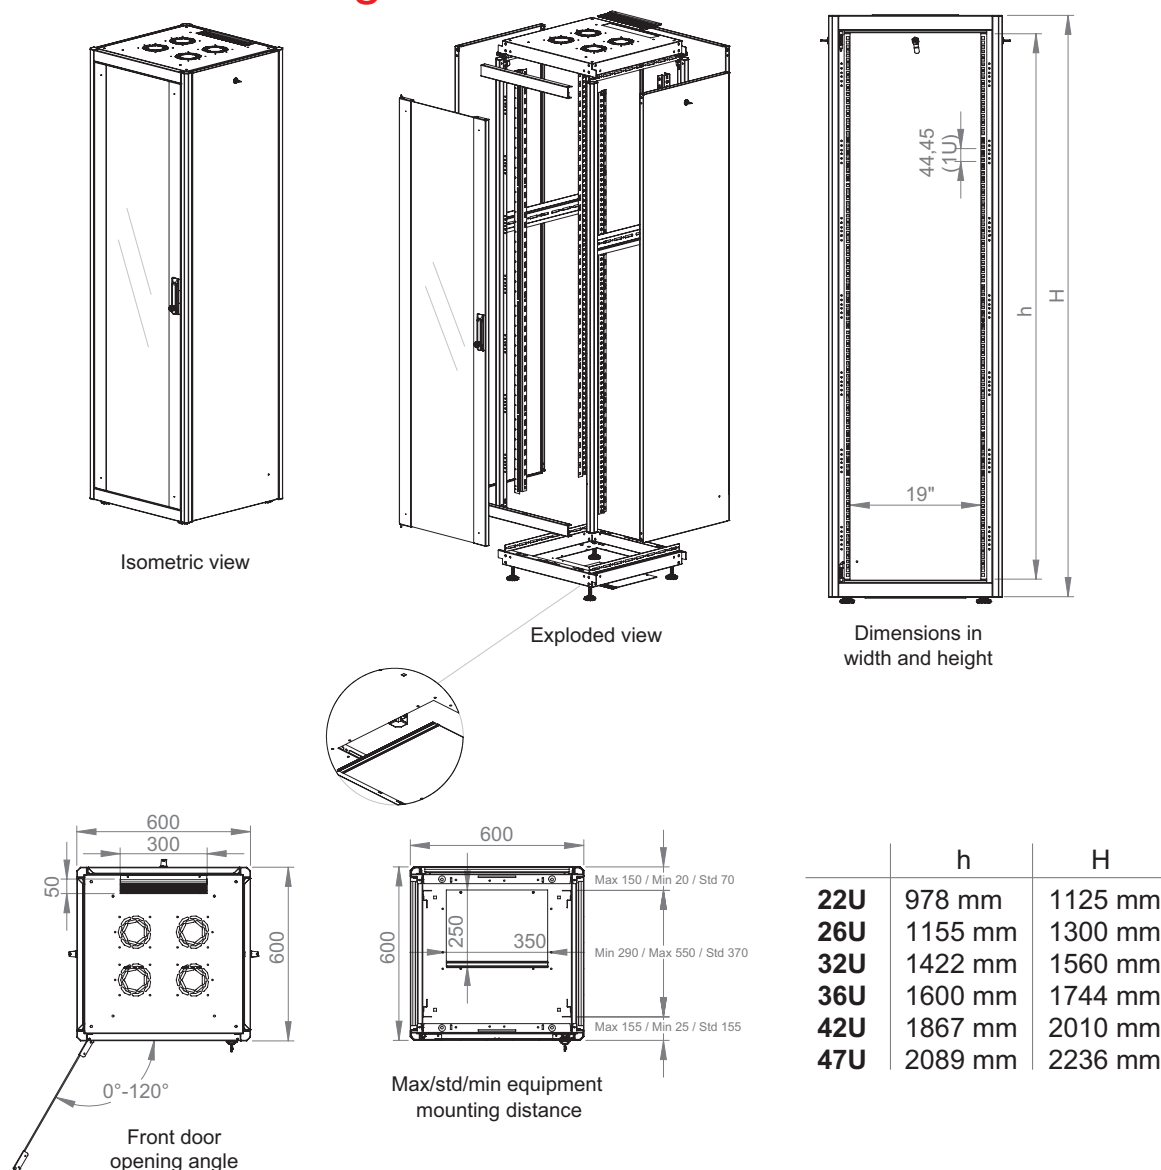

19" DYNAmic Basic Series Free Standing Cabinets W=600 mm D=600 mm

Product Number***	Product Description	Size WxDxH mm	h Size in U	h in mm	*H mm, overall without feet and/or castor	Width Overall mm	Width Rail to Rail	Depth Overall mm	**Depth Shipping Conf. Rail to Rail mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Standard NET Weight of Product kgs	Gross Weight of Product kgs	QTY IN PALLET	PALLET DIMENSIONS WxDxH mm	Pallet Weight kgs
LN-DB22U6060-CC	22U 19" free standing cabinet W=600 mm D=600 mm	600x600x1125	22U	978	1125	600	19"	600	370	1	680x680x1265	45.4	47.8	1	680x680x15	54.8
LN-DB26U6060-CC	26U 19" free standing cabinet W=600 mm D=600 mm	600x600x1300	26U	1155	1300	600	19"	600	370	1	680x680x1440	53	54.2	1	680x680x15	61.2
LN-DB32U6060-CC	32U 19" free standing cabinet W=600 mm D=600 mm	600x600x1560	32U	1422	1560	600	19"	600	370	1	680x680x1700	61	63	1	680x680x15	70
LN-DB36U6060-CC	36U 19" free standing cabinet W=600 mm D=600 mm	600x600x1744	36U	1600	1744	600	19"	600	370	1	680x680x1850	69	71.8	1	680x680x15	78.8
LN-DB42U6060-CC	42U 19" free standing cabinet W=600 mm D=600 mm	600x600x2010	42U	1867	2010	600	19"	600	370	1	680x680x2150	72.6	76	1	680x680x15	83
LN-DB47U6060-CC	47U 19" free standing cabinet W=600 mm D=600 mm	600x600x2236	47U	2089	2236	600	19"	600	370	1	680x680x2410	78	82	1	680x680x15	89

* Please add 30 mm to H mm if used with adjustable feet, add 80 mm to H mm if castor set are used.

** See min and max adjustable depth variations on drawings.

*** CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering.

**** Unless defined delivery is in flat pack, please add A notation to the part number for assembled delivery ie. LN-DB22U6060-CC-A

***** The logistical information provided in above chart is based on assembled product since packing details of flat-pack is changing based on transport vehicle and the delivery location.

Please consider delivery notes, packing lists and recent data provided with the logistics services of Lande.