


ST3110D Mini High Precision FTTh Cleaver

Product description

The ST3110D fiber cleaver is especially designed for FTTh installations. It is very simple to use.

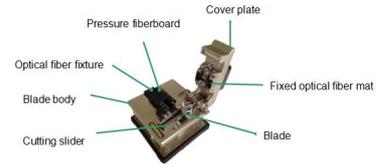

ST3110D

Technical specifications of ST3110D

Specifications/Model	ST3110D
Size	Small
Suitable fiber	Single Fiber
Coating diameter	0.25mm & 0.9mm
Cladding Diameter	125um
Cleaving length	5~20mm
Blade Position	16
Cleaving angle	0,5°
Blade life	4800 times
Weight	Approx. 280g
Dimension	58(W) x 55(D) x 52(H) mm
Standard Accessory	
Optical Fiber Cleaver	1 pc
Bin	Yes
Carrying Case	1 pc
Operation Manual	1 pc
Packaging	

Operating Procedures

1. Open the pressure fiberboard and cover plate, put bare fiber in the fixture that was stripped coating (125mm/900mm), according to user's requirement to ensure cutting length.



2. Push to the front of the cutting slider (Figure), press and close the pressure fiberboard and cover plate to fix optical fiber.



3. After close cover plate, ensure that the fiber is in a horizontal line.

4. Push cutting slider back a one-time to finish cutting.

5. Open cover plate and pressure fiberboard, then take out the fiber. In order to avoid damaging the fiber, fiber face don't touch anything after take it out.

6. After finish cutting, please clean up the broken fiber and don't damage blade for later use.

