


UJX2X2XBH

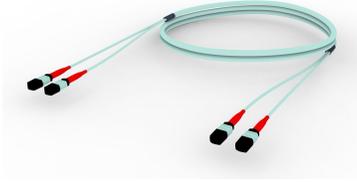

Ultra Low Loss (ULL) OM4 MPO24 (male) to MP/24 (male), Fiber Trunk Cable Assembly, 48-Fiber, Low Smoke Zero Halogen (LSZH)

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL SYSTIMAX ULL
Ordering Note	Not available in the United States or Canada

General Specifications

Color, boot A	Red
Color, boot B	Red
Color, connector A	Aqua
Color, connector B	Aqua
Construction Type	Stranded
Fibers per Subunit, quantity	24
Furcation Color	Aqua
Interface, Connector A	MPO-24/UPC
Interface, Connector B	MPO-24/UPC
Jacket Color	Aqua
Polarity	Method B Enhanced
Total Fibers, quantity	48


Dimensions

Breakout Length	33 in
Cable Assembly Length, minimum (ft)	10

UJX2X2XBH

Cable Assembly Length, maximum (ft)	999
Cable Assembly Length, minimum (m)	3
Cable Assembly Length, maximum (m)	999

Ordering Tree

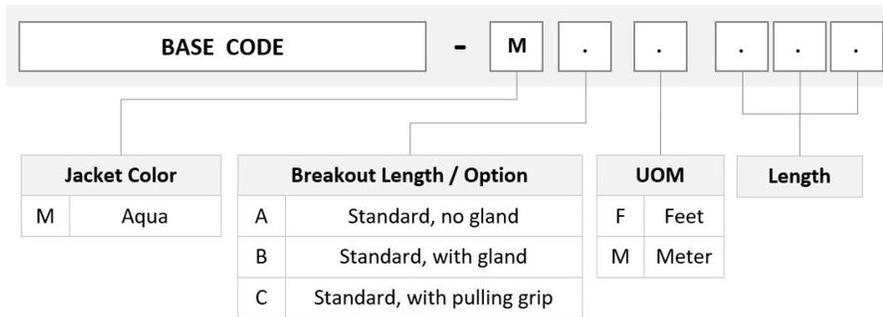

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted




UJX2X2XBH

Included Products

760161802 — LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 48 fiber with 24 fiber subunits
N-048-MP-5K-F24AQ/D

860489152 — LazrSPEED® Elite MPO Male 24 Fiber Connector, aqua



LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 48 fiber with 24 fiber subunits

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio

CommScope®

Product Type

Fiber indoor cable

General Specifications

Cable Type

MPO trunk cable

Construction Type

Non-armored

Fiber Type, quantity

48

Fibers per Subunit, quantity

24

Jacket Color

Aqua

Subunit Type

Gel-free

Subunit, quantity

2

Total Fiber Count

48

Dimensions

Height Over Jacket

5.8 mm | 0.228 in


Width Over Jacket

9.41 mm | 0.37 in

Buffer Tube/Subunit Diameter

3.6 mm | 0.142 in

Representative Image

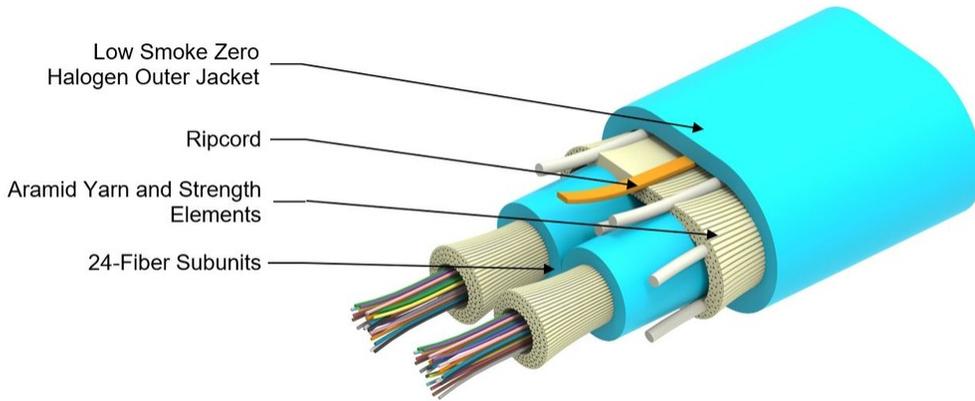

Mechanical Specifications

Minimum Bend Radius, loaded	87 mm 3.425 in
Minimum Bend Radius, unloaded	58 mm 2.283 in
Tensile Load, long term, maximum	240 N 53.954 lbf
Tensile Load, short term, maximum	801 N 180.072 lbf
Compression	10 N/mm 57.101 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	5.88 N-m 52.042 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	445 m 1,459.974 ft

Optical Specifications

Fiber Type	OM4, LazrSPEED® 550 OM4, LazrSPEED® 550
-------------------	---

Environmental Specifications

Installation temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)

760161802 | N-048-MP-5K-F24AQ/D

Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
EN50575 CPR Cable EuroClass Fire Performance	Dca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d1
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH) Riser
Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3 IEC 60754-2 IEC 61034-2 IEEE 383 UL 1666 UL 1685

Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	55.1 kg/km 37.025 lb/kft
---------------------	----------------------------

Regulatory Compliance/Certifications

Agency	Classification
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant



* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

LazrSPEED® Elite MPO Male 24 Fiber Connector, aqua

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber connector
Product Brand	LazrSPEED®

General Specifications

Body Style	24-fiber
Color	Aqua
Color, boot	Red
Ferrule Geometry	Flat
Interface	MPO Male
Interface Feature	Standard

Dimensions

Length	60.1 mm 2.366 in
Compatible Cable Diameter	3.6 mm 0.142 in

Material Specifications

Ferrule Material	Polymer
-------------------------	---------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
--	----------------

Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM3 OM4
Insertion Loss Change, mating	0.3 dB
Optical Components Standard	ANSI/TIA-568-C.3
Insertion Loss Change, temperature	0.3 dB
Insertion Loss, ULL, maximum	0.2 dB
Return Loss, minimum	27 dB

Packaging and Weights

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted



* Footnotes

Insertion Loss Change, mating TIA-568: Maximum insertion loss change after 500 matings

Insertion Loss Change, temperature Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)