

Range: AC-100/200/300



NEW

OPTION

Rejection

5G

READY

Option



PEÇA-DIN

DIN bar support




100x70x30mm

RETURN PATH

5-65MHz



With switching Power Supply

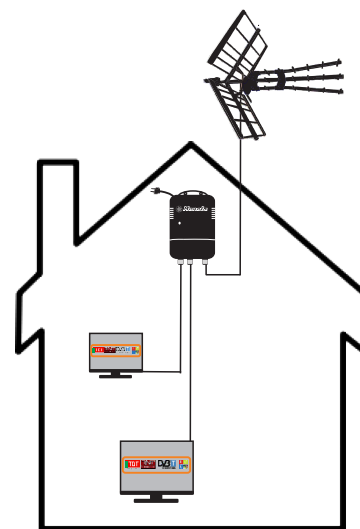

## SAT+TER

| REF.                            | AC-121                 | AC-124                 | AC-222                 | AC-220               |
|---------------------------------|------------------------|------------------------|------------------------|----------------------|
| INPUTS/OUTPUTS                  | 1/2                    |                        |                        | 1/1                  |
| BAND RANGE MHz                  | 47-790                 |                        | 87,5-860               | 85-1000              |
| GAIN dB                         | VHF: 25<br>UHF: 30     | VHF: 15<br>UHF: 25     | 20...25                | 15                   |
| ADJUSTABLE GAIN RANGE dB        | VHF: 0-20<br>UHF: 0-20 | VHF: 0-15<br>UHF: 0-20 | VHF: 0-18<br>UHF: 0-18 | -                    |
| MAXIMUM OUTPUT LEVEL dBμV       | 102*<br>100**          |                        | 107*<br>104**          | 112*<br>109**        |
| MAINS VOLTAGE VAC               | 90...265V~(50/60Hz)    |                        |                        |                      |
| MAINS CONSUMPTION W             | <2                     |                        |                        |                      |
| NOISE FIGURE dB                 | VHF:3<br>UHF:4         | VHF: 3<br>UHF: 4       | 4,5                    | VHF: 3,5<br>UHF: 4,2 |
| CONNECTION                      | "F" Connectors         |                        |                        |                      |
| RETURN PATH MHz                 | No                     |                        | 5-65                   | 5-65                 |
| RETURN PATH dB                  |                        |                        | AT: 5                  |                      |
| SEPARATED AMPLIFICATION VHF-UHF | Yes                    |                        | No                     |                      |

| REF.                            | AC-300                     |
|---------------------------------|----------------------------|
| INPUTS/OUTPUTS                  | 1/1                        |
| BAND RANGE                      | VHF/UHF/FI                 |
| GAIN dB                         | VHF/UHF/FI: 20             |
| ADJUST GAIN RANGE dB            | No                         |
| MAX OUTPUT LEVEL dBμV           | 102*<br>100**              |
| NOISE FIGURE dB                 | VHF/UHF/FI: 2,5<br>FI: 2,5 |
| SEPARATED AMPLIFICATION VHF-UHF | No                         |
| FLOW OF CURRENT Receiver / LNB  | Yes                        |
| MAINS VOLTAGE VAC               | 90...265V~(50/60Hz)        |
| MAINS CONSUMPTION W             | <2                         |
| CONNECTION                      | "F" Connectors             |

\*DIN 45004B, IMD3= -60dB, 3P

\*\*EN 50083-3, IMD3= -60dB, 2P