

## Data sheet

### OpDAT 4 UP 2xSC-D MM (ceramic) pure white

Page 1/5

P/N

150110C202-E


EAN 4250184111405

2018-30-01

## Illustrations



Dimensional drawing

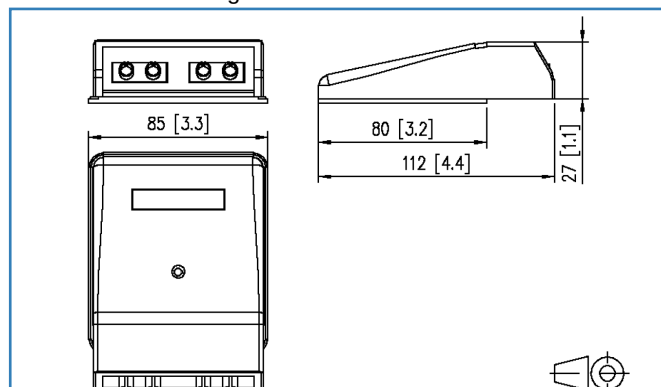

See enlarged drawings at the end of document

## Product specification

- termination unit for mounting on wall conduit with fiber optic adapters
- bending radius of approx. 30 mm is met due to integrated cable reservoir
- plug direction 10° downwards
- strain relief with cable ties possible
- with label window for enclosed identification labels
- suitable for preassembled cables and on-site assembly of plugs
- for mini breakout cables
- cover parts in pure white RAL 9010
- variants: 2 LC-D, 2 SC-D, 4 ST



## Data sheet

Page 2/5

## OpDAT 4 UP 2xSC-D MM (ceramic) pure white

P/N

150110C202-E

EAN 4250184111405

2018-30-01

### Technical Data

#### General Data

|                         |                                        |
|-------------------------|----------------------------------------|
| Fields of application   | Office                                 |
| Design                  | Wall outlet                            |
| Mounting style          | flush mount                            |
| Transmission technology | Fiber optic                            |
| Color                   | pure white                             |
| Dimensions              |                                        |
| Dimension (L x W x H)   | 27.00 x 85.00 x 112.00 mm              |
| Dimension (L x W x H)   | 1.063 x 3.346 x 4.409 in.              |
| Mode type of the fiber  | Multimode                              |
| Labeling option         | label window with identification label |

#### Connections/interfaces

|                                                  |               |
|--------------------------------------------------|---------------|
| Connector technology interface 1                 | SC-D          |
| Connector technology interface 2                 | SC-D          |
| Number of ports interface 1                      | 2             |
| Number of ports interface 2                      | 2             |
| Number of equipped ports interface 1             | 2             |
| Number of ports interface 2 equipped             | 2             |
| Number of ports with dust protection interface 2 | 2             |
| Module plug-in direction                         | 10° downwards |

#### Mechanical characteristics

|                                |                  |
|--------------------------------|------------------|
| Cut-out                        | SC-D, LC-Q, ST-D |
| Connector type                 | Duplex           |
| Life - Number of mating cycles | min. 1000        |
| strain relief                  | cable tie        |

#### Materials and material properties

|                            |                  |
|----------------------------|------------------|
| Material - Housing         | Plastics         |
| Material - Cover part(s)   | ABS              |
| Material - Label window    | ABS, transparent |
| Material - Coupler housing | metal            |
| Material - Sleeve          | ceramic, slotted |



## OpDAT 4 UP 2xSC-D MM (ceramic) pure white

P/N

150110C202-E

EAN 4250184111405

2018-30-01

### Technical Data

#### Certifications

|      |           |
|------|-----------|
| RoHS | compliant |
|------|-----------|

#### The product meets the following standards

|                                         |                     |
|-----------------------------------------|---------------------|
| Cover plates for installation devices 1 | DIN 49075-1:1989-10 |
| Cover plates for installation devices 2 | DIN 49075-2:1989-10 |

#### Classifications

|          |          |
|----------|----------|
| ETIM 5.0 | EC001409 |
| ETIM 6.0 | EC001409 |

#### Packing details

|                                 |                           |
|---------------------------------|---------------------------|
| Type of packaging               | 1 pc(s) / box             |
| Packaging unit - Weight (gram)  | 144.00 g                  |
| Packaging unit - Weight (pound) | 0.32 lb                   |
| Packaging dimension (W x H x D) | 83.00 x 33.00 x 140.00 mm |
| Packaging dimension (W x H x D) | 3.268 x 1.299 x 5.512 in. |



## Data sheet

Page 4/5

## OpDAT 4 UP 2xSC-D MM (ceramic) pure white

P/N

150110C202-E

EAN 4250184111405

2018-30-01

## Accessories

| P/N      | Designation                      |
|----------|----------------------------------|
| 150810-I | OpDAT cable guide for OpDAT 4 UP |



# P | Cabling

## Data sheet

### OpDAT 4 UP 2xSC-D MM (ceramic) pure white

Page 5/5

P/N

150110C202-E

EAN 4250184111405

2018-30-01

## Illustrations

### Dimensional drawing

