

P | Cabling

Data sheet

OpDAT PF patch panel VIK
12xSC-D (metal), MM, gray

Page 1/5

P/N

1502005212-E

EAN 4250184108238


2021/08/30

Version: W

Illustrations



Dimensional drawing

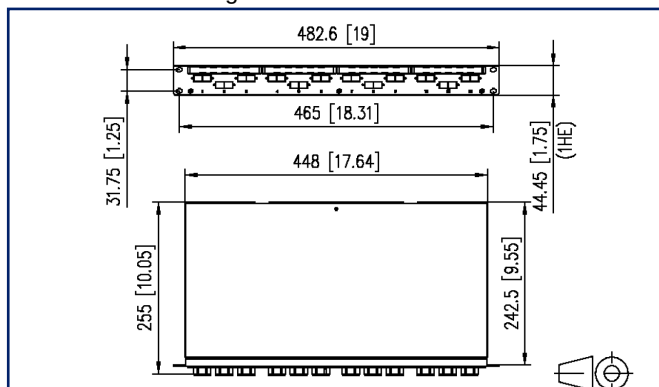

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with SC-D adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light construction with aluminum front plate (gray or black) and housing
- unequipped cutouts are closed with blind plugs
- removable front plate for easy adapter mounting
- 10 possible cable entries in the rear panel for 4x PG13.5, 2x PG16/M20 or 2x PG21/M25 cable glands and for two pre-terminated installation cables (VIK)
- snap-on cover for easy access during service work
- label windows for enclosed identification labels
- variants: equipped with 6 or 12 SC-D adapters blue (OS2), lime green (OM5), violet (OM4), aqua (OM3), metallike (SM+MM) or (MM) or 6 or 12 SC-D APC adapters green (OS2)



P | Cabling

Data sheet

OpDAT PF patch panel VIK 12xSC-D (metal), MM, gray

Page 2/5

P/N

1502005212-E

EAN 4250184108238

2021/08/30

Version: W

Technical Data

General Data

Fields of application

Structured building cabling, Office
Data center

Design patch panel

Mounting style 1RU

Transmission technology Fiber optic

Port numbering yes

Color metallike

Dimensions

Dimension (L x W x H) 255 mm x 482.6 mm x 44.45 mm

Dimension (L x W x H) 10.039 in. x 19 in. x 1.75 in.

Inches 19 inches

Height unit 1RU

Mode type of the fiber Multimode

Fiber construction 50/125 µm

Labeling option label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1 SC-D Couplers

Connector technology interface 2 SC-D Couplers

Number of ports interface 1 12

Number of ports interface 2 12

Number of equipped ports interface 1 12

Number of ports interface 2 equipped 12

Number of ports with dust protection interface 1 12

Number of ports with dust protection interface 2 12

Cable access/outlet several possibilities for cable entry on the back

Mechanical data

Cut-out SC-D, LC-Q, ST-D

Connector type duplex

Life - Number of mating cycles min. 1000

strain relief yes



P | Cabling

Data sheet

Page 3/5

OpDAT PF patch panel VIK 12xSC-D (metal), MM, gray

P/N

1502005212-E

EAN 4250184108238

2021/08/30

Version: W

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	GD-Zn (zinc die-cast)
RoHS	compliant

Classifications

ETIM 6.0	EC001130
ETIM 7.0	EC001130
ETIM 8.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension	540 mm x 380 mm x 60 mm
Packaging dimension	21.26 in. x 14.961 in. x 2.362 in.

P | Cabling

Data sheet

Page 4/5

OpDAT PF patch panel VIK 12xSC-D (metal), MM, gray

P/N

1502005212-E

EAN 4250184108238

2021/08/30

Version: W

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
1502500000-E	OpDAT PF/fix patch cord tray gray
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7 to 12 mm)
150811M25-E	Cable gland M25
899011-01	Label sheet for Modul patch panels / REG
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels



P | Cabling

Data sheet

OpDAT PF patch panel VIK
12xSC-D (metal), MM, gray

Page 5/5

P/N

1502005212-E

EAN 4250184108238

2021/08/30

Version: W

Illustrations

Dimensional drawing

