

Data sheet

OpDAT PF patch panel VIK
6xLC-D (violet), OM4, gray

Page 1/5


P/N
1502007506-E
EAN 4250184197782

2018-13-03

Illustrations



Dimensional drawing

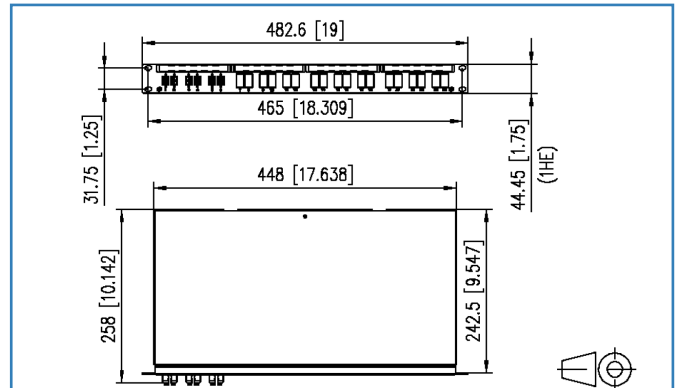

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with LC-D adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light construction with aluminum front plate (gray or black) and housing
- unequipped cutouts are closed with blind plugs
- removable front plate for easy adapter mounting
- 10 possible cable entries in the rear panel for 4x PG13.5, 2x PG16/M20 or 2x PG21/M25 cable glands and for two pre-terminated installation cables (VIK)
- snap-on cover for easy access during service work
- label windows for enclosed identification labels
- variants: equipped with 6, 12 or 24 LC-D adapters each blue (OS2), lime green (OM5), heather violet (OM4), aqua (OM3) or 6, 12 or 24 LC-D APC adapters green (OS2)



Data sheet

OpDAT PF patch panel VIK 6xLC-D (violet), OM4, gray

Page 2/5

P/N
1502007506-E
EAN 4250184197782

2018-13-03

Technical Data

General Data

Fields of application

	Structured building cabling, Office Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	violet
Dimensions	
Dimension (L x W x H)	258.00 x 482.60 x 44.45 mm
Dimension (L x W x H)	10.157 x 19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1	LC-D Couplers
Connector technology interface 2	LC-D Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	6
Number of equipped ports interface 2	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6
Number of blind covers interface 2	18
Cable access/outlet	several possibilities for cable entry on the back

Mechanical characteristics

Life - Number of mating cycles	min. 1000
strain relief	yes



Data sheet

Page 3/5

OpDAT PF patch panel VIK 6xLC-D (violet), OM4, gray

P/N

1502007506-E

EAN 4250184197782

2018-13-03

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-20
----------------------------------	-----------------

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	540.00 x 380.00 x 60.00 mm
Packaging dimension (W x H x D)	21.26 x 14.961 x 2.362 in.



Data sheet

OpDAT PF patch panel VIK 6xLC-D (violet), OM4, gray

Page 4/5

P/N

1502007506-E

EAN 4250184197782

2018-13-03

Accessories

P/N	Designation
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels



P | Cabling

Data sheet

OpDAT PF patch panel VIK 6xLC-D (violet), OM4, gray

Page 5/5

P/N

1502007506-E

EAN 4250184197782

2018-13-03

Illustrations

Dimensional drawing

