

## Data sheet


**OpDAT PF patch panel VIK**  
**12xSC-D APC (green), OS2, gray**

Page 1/4


P/N  
**150200F212-E**  
**EAN 4251394600451**

2018-27-02

## Illustrations

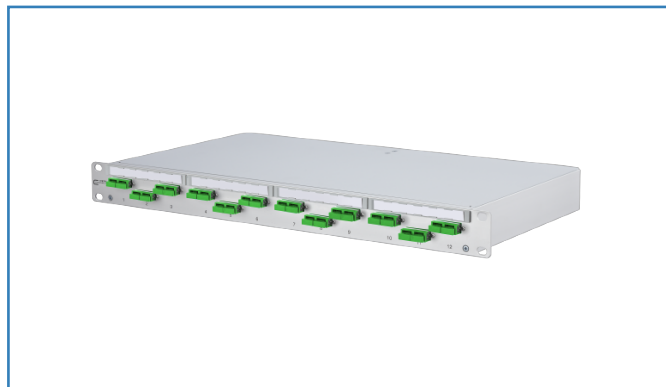

Dimensional drawing

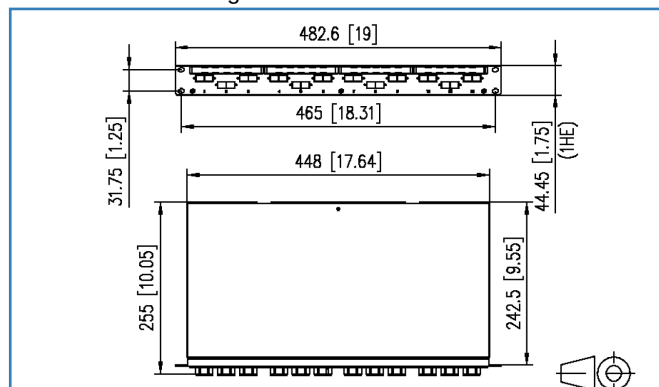

See enlarged drawings at the end of document

## Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with SC-D adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light construction with aluminum front plate (gray or black) and housing
- unequipped cutouts are closed with blind plugs
- removable front plate for easy adapter mounting
- 10 possible cable entries in the rear panel for 4x PG13.5, 2x PG16/M20 or 2x PG21/M25 cable glands and for two pre-terminated installation cables (VIK)
- snap-on cover for easy access during service work
- label windows for enclosed identification labels
- variants: equipped with 6 or 12 SC-D adapters blue (OS2), lime green (OM5), violet (OM4), aqua (OM3), metallike (SM+MM) or (MM) or 6 or 12 SC-D APC adapters green (OS2)



## Data sheet

### OpDAT PF patch panel VIK 12xSC-D APC (green), OS2, gray

Page 2/4

P/N  
150200F212-E  
EAN 4251394600451

2018-27-02

## Technical Data

### General Data

#### Fields of application

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
|                         | Office                                                   |
|                         | Data center                                              |
| Design                  | patch panel                                              |
| Mounting style          | 1RU                                                      |
| Transmission technology | Fiber optic                                              |
| Port numbering          | yes                                                      |
| Color                   | green                                                    |
| Dimensions              |                                                          |
| Dimension (L x W x H)   | 255.00 x 482.60 x 44.45 mm                               |
| Inches                  | 19 inches                                                |
| Height unit             | 1RU                                                      |
| Mode type of the fiber  | Single mode                                              |
| Shape                   | APC (Angled Physical Contact)                            |
| Fiber construction      | 9/125 µm                                                 |
| Labeling option         | label window with identification label + printed numbers |

### Connections/interfaces

|                                                  |                                                   |
|--------------------------------------------------|---------------------------------------------------|
| Connector technology interface 1                 | SC-D Couplers                                     |
| Connector technology interface 2                 | SC-D Couplers                                     |
| Number of ports interface 1                      | 12                                                |
| Number of ports interface 2                      | 12                                                |
| Number of equipped ports interface 1             | 12                                                |
| Number of ports interface 2 equipped             | 12                                                |
| Number of ports with dust protection interface 1 | 12                                                |
| Number of ports with dust protection interface 2 | 12                                                |
| Cable access/outlet                              | several possibilities for cable entry on the back |

### Mechanical characteristics

|                                |                  |
|--------------------------------|------------------|
| Cut-out                        | SC-D, LC-Q, ST-D |
| Connector type                 | Duplex           |
| Life - Number of mating cycles | min. 1000        |
| strain relief                  | yes              |



## Data sheet

Page 3/4

### OpDAT PF patch panel VIK 12xSC-D APC (green), OS2, gray

P/N

150200F212-E

EAN 4251394600451

2018-27-02

## Technical Data

### Materials and material properties

|                            |                  |
|----------------------------|------------------|
| Material - Housing         | Al (Aluminium)   |
| Material - Front cover     | Al (Aluminium)   |
| Material - Sleeve          | ceramic, slotted |
| Material - Coupler housing | Plastics         |

### Approvals

|      |           |
|------|-----------|
| RoHS | compliant |
|------|-----------|

### The product meets the following standards

|                                  |                |
|----------------------------------|----------------|
| Fibre optic connector interfaces | DIN EN 61754-4 |
|----------------------------------|----------------|

### Packing details

|                                 |                            |
|---------------------------------|----------------------------|
| Type of packaging               | 1 pc(s) / box              |
| Packaging dimension (W x H x D) | 540.00 x 380.00 x 60.00 mm |
| Packaging dimension (W x H x D) | 21.26 x 14.961 x 2.362 in. |



## Data sheet

### OpDAT PF patch panel VIK 12xSC-D APC (green), OS2, gray

Page 4/4

P/N

150200F212-E

EAN 4251394600451

2018-27-02

## Illustrations

### Dimensional drawing

