

BAB 20-20 2-way tap | 20 dB | 5...1006 MHz

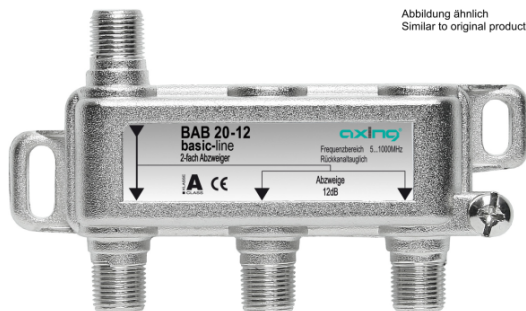


Abbildung ähnlich
Similar to original product

- ✓ High return loss
- ✓ For multimedia-use
- ✓ Inputs and outputs hum-suppressed

Order information

Type	BAB 20-20
Order no.	BAB02020
GTIN	7611682001075
PE	1
VE	1
EU customs tariff number	85291080



Technical data

Screening factor acc. to EN 50083-2	> 90 dB
Frequency range	5...1006 MHz
Tap loss	20 ± 1 dB
Through loss	
5...40 MHz	≤ 0.8 dB
40...470 MHz	≤ 0.8 dB
470...862 MHz	≤ 1.0 dB
862...1006 MHz	≤ 1.3 dB
Connectors	
Connector type	F
Return loss	≥ 17
General	
Dimensions (W × H × D) appr.	89 × 55 × 30 mm
Weight	0.079 kg