

SVS 1717-09 Headamplifier | 17 in 17



- ✓ For use with SPU 17xx-09 systems
- ✓ 16 × SAT 950...2200 MHz | Gain 21...27 dB
- ✓ 1 × TERR 5...862 MHz | Gain 15 dB
- ✓ Built-in attenuators 0...15 dB
- ✓ Switching power supply unit (detachable up to 10 m)
- ✓ 17 termination resistors CFA 11-00 included

Order information


Type	SVS 1717-09
Order no.	SVS171709
GTIN	7611682003321
PE	1
VE	1
EU customs tariff number	85437030



Technical data

Inputs	
Number	17
Frequency range	5...65 MHz 85...862 MHz 950...2200 MHz
Attenuator adjustment range	0...15 dB
Gain TERR	15 dB
Gain SAT	21...27 dB
Gain return path (passive)	-2 dB
Isolation SAT inputs SAT inputs	40 dB
Isolation TERR SAT	40 dB
Trunk outputs	
Number	17
Max. output level TERR (3rd order EN 50083-3, 60 dB KMA)	109 dBμV
Max. output level trunk SAT (3rd order EN 50083-3, 35 dB KMA, 2 sender test method)	114 dBμV
Isolation TERR SAT	40 dB
Isolation SAT SAT	40 dB
Connectors	
Connector type	F
General	
Switching power supply	90...250 V~ 47...63 Hz 18 V= / 2 A
Power consumption	22 W
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	407 (432)* × 145 × 85 mm
Weight	1.600 kg
Protection class	IP 20
Comments	* incl. DC bridge

Example of use

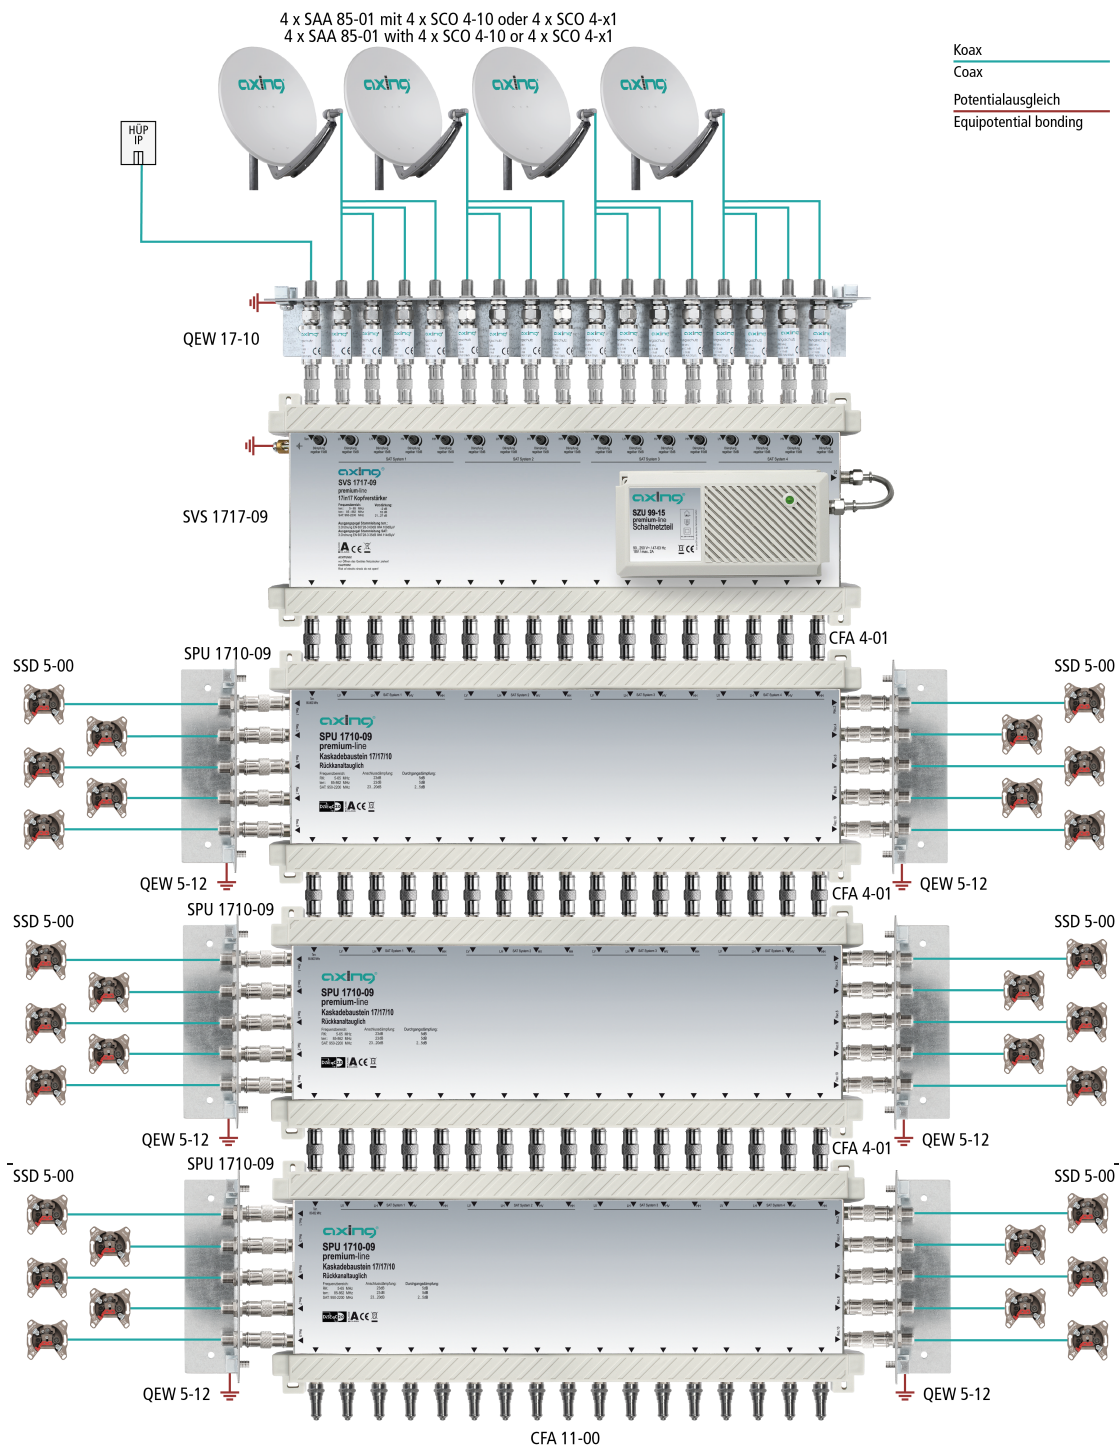

Suitable products

QEW 17-10 Earthing angle | single-rowed | surge protection