

Complete packages | pre-assembled

- ✓ Minimum installation time due to ready-to-operate, pre-installed system
- ✓ Service- and assembly-friendly
- ✓ With overvoltage protection and equipotential bonding at the inputs
- ✓ With equipotential bonding at subscriber ports
- ✓ Optionally available with power supply unit SZU 99-06

Available packages:

SZU 58-06 Complete multiswitch package 5 in 8, for up to 8 subscribers

Consisting of:

- ✓ 1 x QMP 3045 Perforated mounting plate
- ✓ 1 x SPU 58-06 Multiswitch 5 in 8
- ✓ 1 x QEW 5-06 Earthing angle
- ✓ 2 x QEW 4-06 Earthing angle
- ✓ 5 x CFA 11-00 Terminating resistor
- ✓ 8 x SAK 21-02 Patch cable

SZU 512-06 Complete multiswitch package 5 in 12, for up to 12 subscribers


Consisting of:

- ✓ 1 x QMP 3045 Perforated mounting plate
- ✓ 1 x SPU 512-06 Multiswitch 5 in 12
- ✓ 1 x QEW 5-06 Earthing angle
- ✓ 2 x QEW 6-06 Earthing angle
- ✓ 5 x CFA 11-00 Terminating resistor
- ✓ 12 x SAK 21-02 Patch cable


SZU 516-06 Complete multiswitch package 5 in 16, for up to 16 subscribers

Consisting of:

- ✓ 1 x QMP 3045 Perforated mounting plate
- ✓ 1 x SPU 516-06 Multiswitch 5 in 16
- ✓ 1 x QEW 5-06 Earthing angle
- ✓ 2 x QEW 8-06 Earthing angle
- ✓ 5 x CFA 11-00 Terminating resistor
- ✓ 16 x SAK 21-02 Patch cable

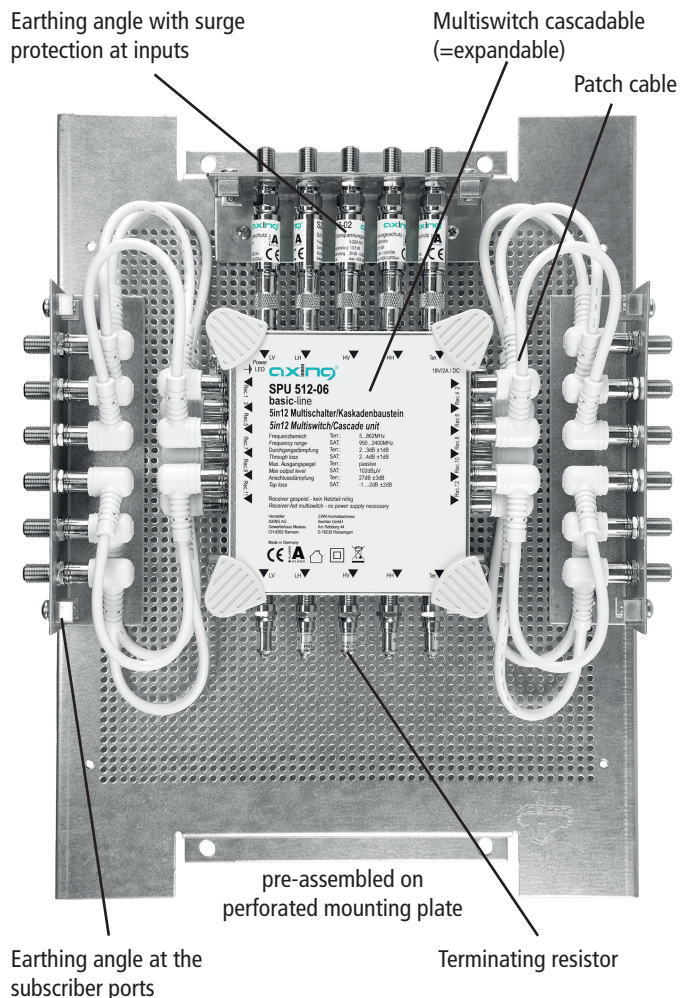

Individual multiswitch complete packages can be manufactured on request.




AXING AG
Gewerbehaus Moskau
Phone +41 52 - 742 83 00
Fax +41 52 - 742 83 19

 8262 Ramsen
info@axing.com
www.axing.com

Technische Daten

Typ	SZU 58-06	SZU 512-06	SZU 516-06
Eingänge			
Anzahl		5	
Frequenzbereich		5...862 MHz 950...2400 MHz	
Max. LNB-Strom		1500 mA	
Entkopplung V H		>30 dB	
Entkopplung TERR SAT		30 dB	
Teilnehmeranschlüsse			
Anzahl	8	12	16
Schaltkriterien		13/18 V, 0/22 kHz	
Anschlussdämpfung SAT	-1...-3 dB $\pm$ 2 dB	-1...-2 dB $\pm$ 2 dB	-1...-2 dB $\pm$ 2 dB
Max. Ausgangspegel SAT (3. Ordnung, EN 50083-3 35dB KMA, 2 Sender Messmethode)		102 dB μ V	
Stromaufnahme je Anschluss (ohne LNB-Versorgung)		< 35 mA	
Stammausgänge			
Anzahl		5	
Durchgangsdämpfung TERR	2 dB $\pm$ 1 dB	2...3 dB $\pm$ 1 dB	2...3 dB $\pm$ 1 dB
Durchgangsdämpfung SAT	2 dB $\pm$ 1 dB	2...4 dB $\pm$ 1 dB	2...4 dB $\pm$ 1 dB
Anschlüsse			
Anschlusstyp		F	
Allgemein			
Betriebstemperaturbereich (gemäß EN 60065)		-20...+50°C	
Schutzklasse		IP 20	
Maße (B x H x T) ca.		300 x 400 x 170 mm	



AXING AG
Gewerbehaus Moskau
Phone +41 52 - 742 83 00
Fax +41 52 - 742 83 19

8262 Ramsen
info@axing.com
www.axing.com