

LogiLink®

HDMI™ Extender Set Via Network Cable

1080p/60 Hz, Extend Up To 30 m


Art. No.: HD0021




Allows you to extend HDMI video and audio signals by up to 30 m over dual networking cable; with supports resolution up to 1080p/60 Hz. Also, it can power over HDMI cable, no need extra adapter. Ideal for extending signal in areas where access to power outlets is limited.

Features:

- » Supports 1080p@60 Hz up to 30 m over two Cat. 6/7/8 cables
- » Pigtail type with 0.3 m cable
- » Bandwidth: 1.65 Gbps/165 MHz per channel (4.95 Gbps total)
- » Supports deep color 8 bit/10 bit per channel (24 bit/30 bit all channels)
- » Supports 3D, DDC (Display Data Channel) and CEC (Consumer Electronics Control)
- » Supports HDCP pass-through
- » Supports uncompressed audio such as LPCM 7.1
- » Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby TrueHD)
- » Power over HDMI

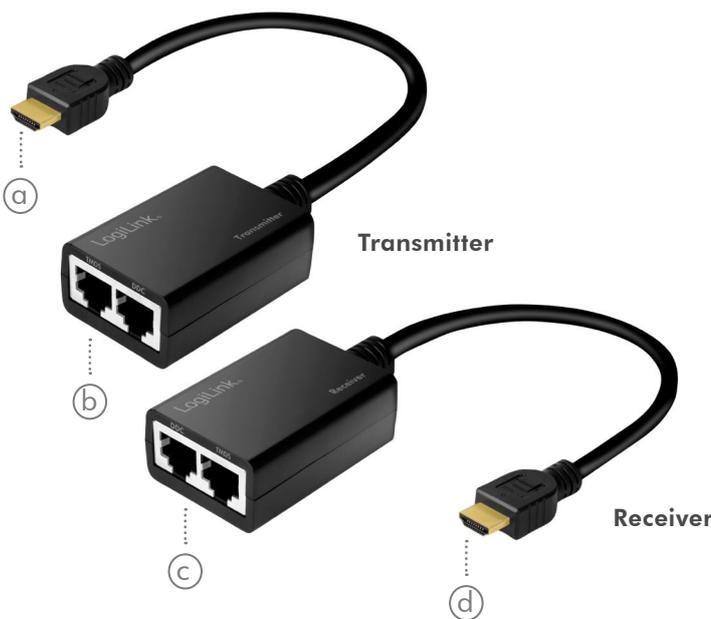

- (a) HDMI In: connect to HDMI source devices
- (b) Ethernet Ports: connect to receiver via network cable
- (c) Ethernet Ports: connect to transmitter via network cable
- (d) HDMI Out: connect to HDMI display devices

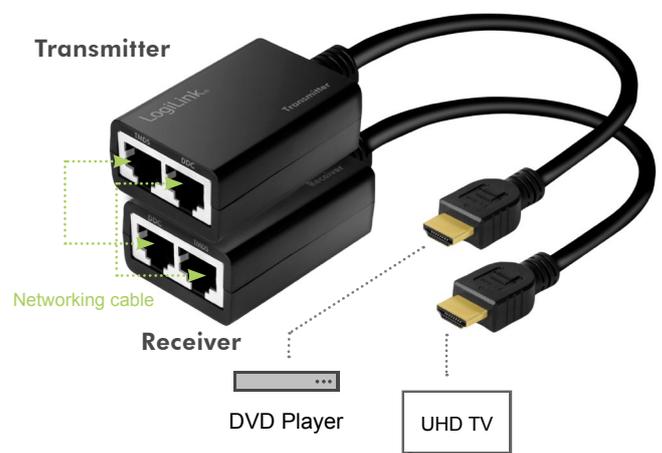

RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



Made in China

Specifications:

Transmitter (TX) Interface	1x HDMI-A female, 2x RJ45
Receiver (RX) Interface	1x HDMI-A female, 2x RJ45
HDMI Version	1.3
HDCP Version	1.3
Working Distance	30 m
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz
Video Bandwidth	1,65 Gbps/165 MHz
CEC (Consumer Electronics Control)	Yes
DDC (Display Data Channel)	Yes
Chassis Material	ABS
3D Supporting	Yes
Power Consumption	5 W max.
Uncompressed Audio	LPCM 7.1
Compressed Audio	DTS, Dolby Digital, DTS-HD Master Audio™, Dolby TrueHD
Networking Cable	Cat 5e/6/7/8
Operating Temperature	0°C–70°C
Operating Humidity	10%–85% RH (no condensation)
Storage Temperature	-10°C–80°C
Storage Humidity	5%–90% RH (no condensation)
Dimensions	5,4x3,6x2,2 cm
Weight	TX: 0,11 kg, RX: 0,11kg

Package Contents:

- » 1x Transmitter
- » 1x Receiver
- » 1x User Manual

Package Information:

- » Packing Dimension: 190x145x60 mm
- » Packing Weight: 0,2 kg
- » Carton Dimension: 505x235x340 mm
- » Carton Q'ty: 15 pcs
- » Carton Weight: 4 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



Made in China