

Tactical Cable (HFFR)

ID: **Z355**




KABELOVNA Děčín Podmokly s.r.o.
Ústecká 840/33, 405 33 Děčín 5
Czech Republic
DIČ CZ26759993
tel.: +420 412 706 222
www.kabelovna.cz

17.10.2018 ver. 3

J/A-VQ(ZN)11Y max. 4F

This cable is suitable for indoor or outdoor use. The cable has good protection against chemicals, is resistant to abrasion.

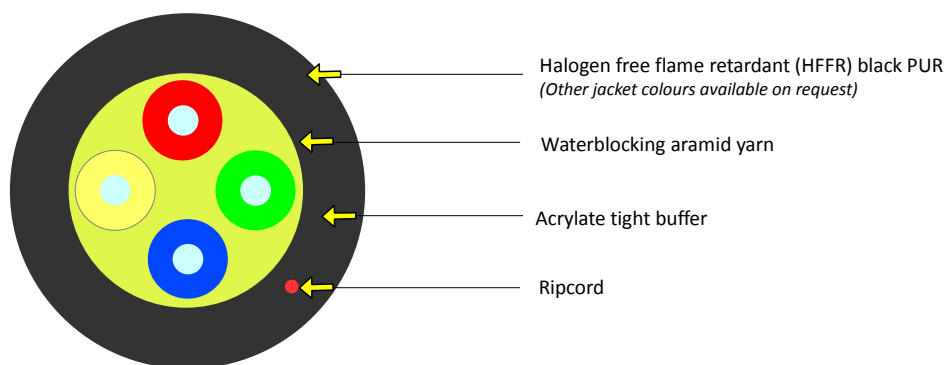

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	5,5±0,3	mm	EN 60811-203
Cable weight	29	kg/km	
Outer jacket thickness	1,45	mm	
Max. tensile strength	1400	N	EN 60794-1-21-E1
Crush resistance test	2000	N	EN 60794-1-21-E3
Impact resistance test	15	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	20	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	25	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to + 50	°C
	Operation	-40 to + 85	°C
	Storage	-40 to + 85	°C

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Buffer

xxTx	Tight	strip. up to 7 cm
Colour 1 st to 4 th	Red, green, blue, yellow	
	(according to IEC 60304)	
Material	Acrylate	

Fibre Type

Multi mode fiber
See the Fibre Specification sheet

Packing

Depending on ordered put-up lengths

