



Mast Amplifiers



Range: TVF-120



NEW

OPTION

Rejection

5G

READY

108

dBµV

IP23


Power supply

24V

Rejection

4G

lte

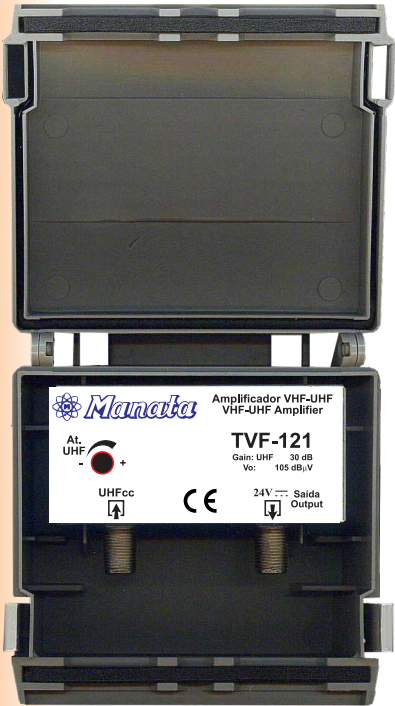

95x100x45mm



Dc to Pré-amplifier per SWITCH/JUMPER

Option in Kit's

KIT-522AL = TVF-122 + AL-24V

KIT-525AL = TVF-125 + AL-24V

REF.	TVF-121	TVF-122	TVF-123	TVF-124	TVF-125
INPUTS	1 UHFcc	1 UHF	2 UHF UHF	1 UHFcc	2 UHFcc UHF
GAIN	30	20	20	40	30
ADJUSTABLE GAIN RANGE	20				
MAXIMUM OUTPUT LEVEL	108* 105**				
SUPPLY	24				
CONSUMPTION	45				
NOISE FIGURE	4,5	4,5	5	4,5	5
SWITCH / JUMPER	Yes	No	No	Yes	Yes - 1UHF
DC TO PRÉ - AMPLIFIER	24V/40mA			24V/40mA	24V/40mA
CONNECTION	«F» Connectors				

*DIN 45004B, IMD3= -60dB, 3P

**EN 50083-3, IMD3= -60dB, 2P