

P | Cabling

Data sheet

OpDAT fix patch panel VIK
12xST-D (metal), SM+MM, gray


Page 1/5

P/N
150250D112-E
EAN 4250184126843
 2021/09/28
 Version: W

Illustrations



Dimensional drawing

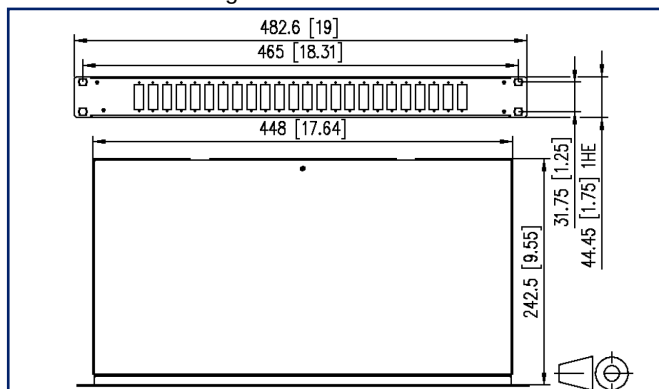

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with ST-D adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light aluminum construction with steel sheet front plate painted (gray or black)
- unoccupied recesses are closed with blind plugs
- removable front plate for easy adapter mounting
- screwed on cover for easy access during service work
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- toolless fastening of pre-assembled installation cables (OpDAT VIK) in a U-shaped cutout
- variants: equipped with 6, 12 or 24 ST-D adapters each made of metal(SM+MM)



P | Cabling

Data sheet

OpDAT fix patch panel VIK 12xST-D (metal), SM+MM, gray

Page 2/5

P/N

150250D112-E

EAN 4250184126843

2021/09/28

Version: W

Technical Data

General Data

Fields of application

Structured building cabling, Office
Data center

Design patch panel

Mounting style 1RU

Transmission technology Fiber optic

Port numbering yes

Color metallike

Dimensions

Dimension (L x W x H) 242.5 mm x 482.6 mm x 44.45 mm

Dimension (L x W x H) 9.547 in. x 19 in. x 1.75 in.

Inches 19 inches

Height unit 1RU

Installation depth 243 mm

Installation depth 9.567 in.

Labeling option printed numbers

Connections/interfaces

Connector technology interface 1 ST-D Couplers

Connector technology interface 2 ST-D Couplers

Number of ports interface 1 24

Number of ports interface 2 24

Number of equipped ports interface 1 12

Number of ports interface 2 equipped 12

Number of ports with dust protection interface 1 12

Number of ports with dust protection interface 2 12

Number of blind 12

Mechanical data

Cut-out SC-D, LC-Q, ST-D

Connector type duplex

Life - Number of mating cycles min. 1000

strain relief yes



P | Cabling

Data sheet

Page 3/5

OpDAT fix patch panel VIK 12xST-D (metal), SM+MM, gray

P/N

150250D112-E

EAN 4250184126843

2021/09/28

Version: W

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Sleeve	ceramic, slotted
Material - Coupler housing	metal
RoHS	compliant

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC001130
ETIM 8.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension	523 mm x 361 mm x 45 mm
Packaging dimension	20.591 in. x 14.213 in. x 1.772 in.



P | Cabling

Data sheet

Page 4/5

OpDAT fix patch panel VIK
12xST-D (metal), SM+MM, gray

P/N
150250D112-E
EAN 4250184126843
 2021/09/28
 Version: W

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
1502500000-E	OpDAT PF/fix patch cord tray gray
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7 to 12 mm)
150811M25-E	Cable gland M25

P | Cabling

Data sheet

Page 5/5

OpDAT fix patch panel VIK
12xST-D (metal), SM+MM, gray

P/N

150250D112-E

EAN 4250184126843

2021/09/28

Version: W

Illustrations

Dimensional drawing

