


BAB 20-14 2-way tap | 14 dB | 5...1006 MHz

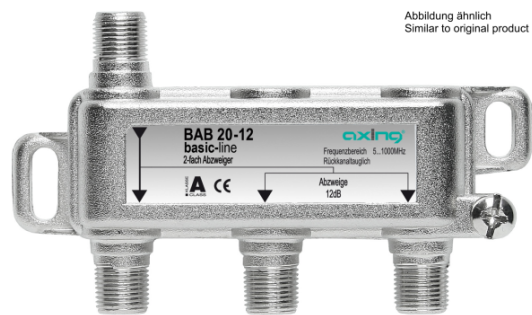

- ✓ High return loss
- ✓ For multimedia-use
- ✓ Inputs and outputs hum-suppressed

Order information

Type	BAB 20-14
Order no.	BAB02014
GTIN	7611682001044
PE	1
VE	1
EU customs tariff number	85291080



Technical data

Screening factor acc. to EN 50083-2	> 90 dB
Frequency range	5...1006 MHz
Tap loss	14 ±1 dB
Through loss	
5...40 MHz	≤ 1.3 dB
40...470 MHz	≤ 1.4 dB
470...862 MHz	≤ 1.7 dB
862...1006 MHz	≤ 1.9 dB
Connectors	
Connector type	F
Return loss	≥ 17
General	
Dimensions (W × H × D) appr.	89 × 55 × 30 mm
Weight	0.079 kg