


QEW 513-06 Earthing angle | single-rowed | surge protection

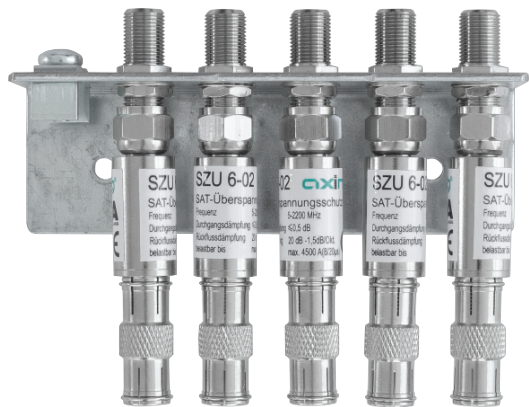

- ✓ 5-way
- ✓ Earthing and equipotential bonding acc. to EN 60728-11
- ✓ For AXING headamplifiers SVS 550-06 and SVS 1313-06 (for SVS 1313-06 an additional QEW 917-06 is required)
- ✓ Incl. surge protection devices SZU 6-02
- ✓ With premium-line double F-sockets CFA 26-02 and quickfix adapter CFA 4-01

Order information

Type	QEW 513-06
Order no.	QEW51306
GTIN	7611682006711
PE	1
VE	1
EU customs tariff number	85366910

Wide Band
approved - 2.4 GHz

Technical data

Application	SVS 550-06 / SVS 1313-06
Screening factor acc. to EN 50083-2	> 90 dB
Frequency range	5...2500 MHz
Through loss	≤ 0.5 dB
DC power pass	yes
Max. through current	0.5 A @ 30 VDC
Impulse discharge current	5 kA @ 8/20 µs
Connectors	
Connector type	F
Number	5
Return loss	20 dB -1.5dB/Okt.
General	
Material	surface treated
Weight	0.3 kg