

SVS 440-06 Wideband-Kopfverstärker | 4 in 4



- ✓ 4 × SAT 250...2400 MHz
- ✓ Gain 14...20 dB
- ✓ Input attenuators 0...15 dB
- ✓ External power supply SZU 99-06 needed (not included in delivery)

Order information


Type	SVS 440-06
Order no.	SVS44006
GTIN	7611682006858
PE	1
VE	1
EU customs tariff number	85437030



Technical data

Inputs	
Number	4
Frequency range	250...2400 MHz
Attenuator adjustment range	0...15 dB
Gain SAT	14...20 dB ±2 dB
Output	
Max. output level SAT (3rd order SAT, EN 50083-3, 35 dB KMA)	114 dBµV
Trunk line	
Isolation internal	>38 dB
General	
Operating voltage	18 V
Current consumption	220 mA ±12 mA
Equipotential bonding connection	4 mm ²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	170 × 145 × 40 mm
Weight	0.464 kg
Protection class	IP 20

Example of use

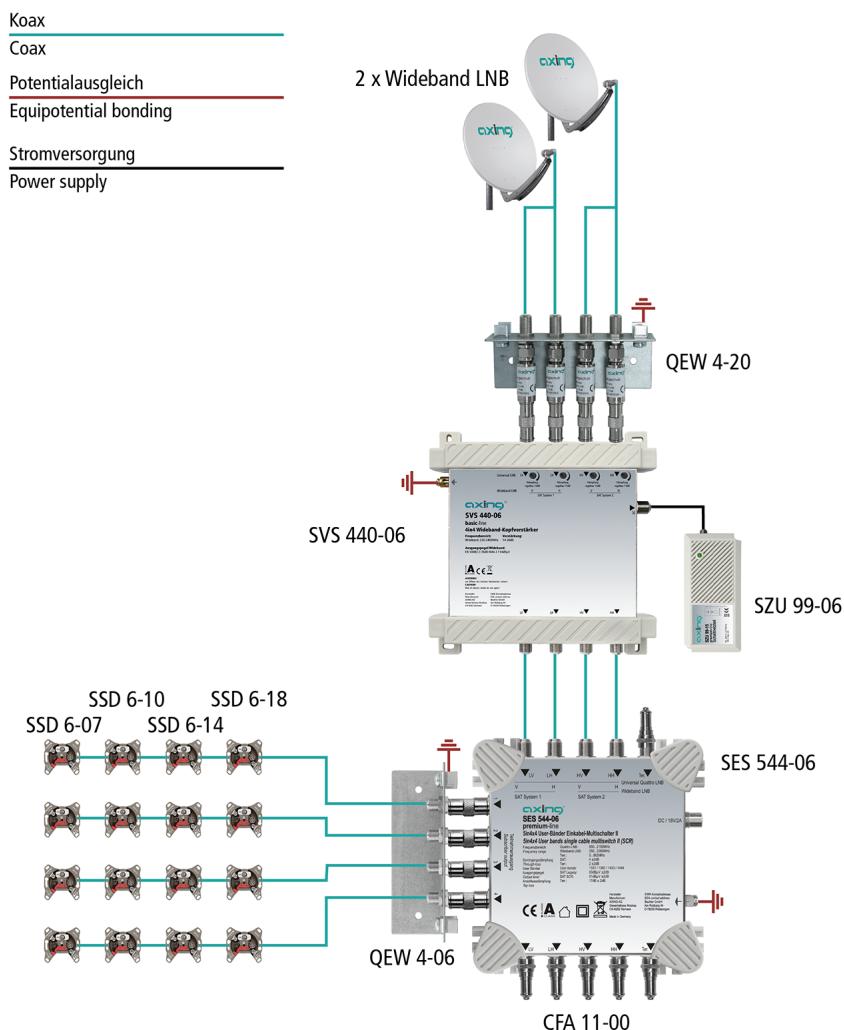

Suitable products

QEW 4-20 Earthing angle | single-rowed | surge protection