



Enlighten Optical Distribution Box Series - TEN-FWB5-0, 24F Outdoor

ENLIGHTEN 24-Fibre Optical Distribution Box

Designed for outdoor mounting this wall box allows easy connection between feeder cables and subscriber cables. The wall box is equipped with a splice tray and lock for secure fixing of box lid.


Features

- Easy to install and maintain.
- Separate tray for ease of splice connections.
- Lockable lid to avoid unauthorized access.
- High quality plastics.
- Multifunctional tray that can accommodate a mini-splitter.



TELESTE

GENERAL			
Max. input cable dia.	14.50 mm	Max. output cable dia.	5.0 mm
Dimension (LxWxH)	331 × 274 × 96 mm	Weight	1.65 kg
Material	PC + ABS plastic	Supported adaptors	SC simplex, LC Duplex
Operating temperature	-40 - +80 °C	IP protection class	IP 65
Colour	White (RAL9010)	Type of installation	Wall-mount and Pole-mount
MECHANICAL LAYOUT			

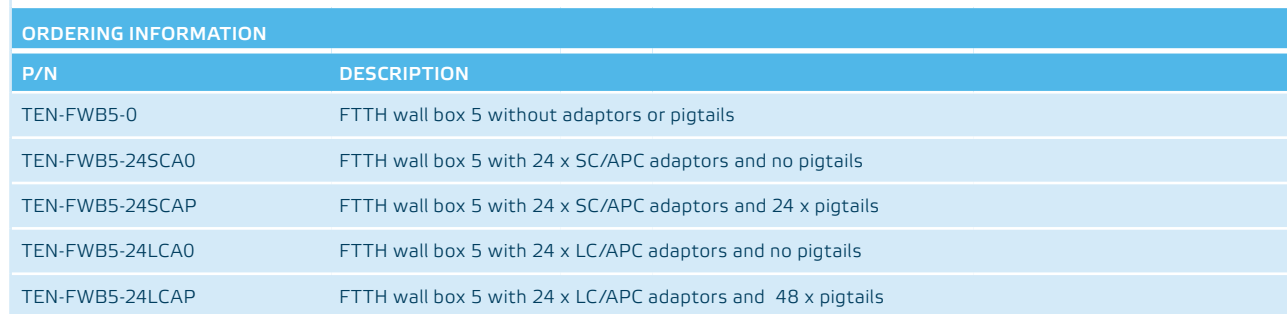

Other product and service marks are property of their respective owners.

Telesse reserves the right to make changes to any features and specifications of the products without prior notice. Although the information in this document has been reproduced in good faith, the contents of this document are provided "as is". Telesse makes no warranties of any kind in relation to the accuracy, reliability or contents of this document, except as required by applicable law.