

Copper Jack

Cat 6 unshielded_toolless

Description

For the transmission of digital and analogue voice, video and data signals.
Suitable for all Category 6 or Class E Channels in accordance with ISO/IEC 11801, EN 50173-1 and TIA/EIA 568-C.2.

- Housing made of high-impact resistant, flame retardant compound, Complaint with UL 94V-0.
- Mounting clip: Keystone.
- With wiring colour code T568-A and B
- Contact spring with phosphor bronze alloy, plated with gold.
- Toolless terminal
- Multiple colour for choice



Technical data

Construction

Description	Values	Comment
Dimension (W x D x H)	16.7x 34.5 x 16.3mm	
Main construction	Plastic	
Suitable connector	RJ45	


Mechanical and environmental data

Characteristics	Values	Tested acc. to	Comment
For solid copper wire	AWG 22 ~AWG 24		
Insertion/extraction life	750 cycles minimum		
Compliant with RoHS and REACH	Yes		

Electrical data

Characteristics	Values	Tested acc. to	Comment
Insulation resistance	500 MΩ min. @100V d.c		
Dielectric withstanding voltage:	1000V d.c. or a.c. peak contact to contact @60Hz for 1 minute.		

Technical drawing

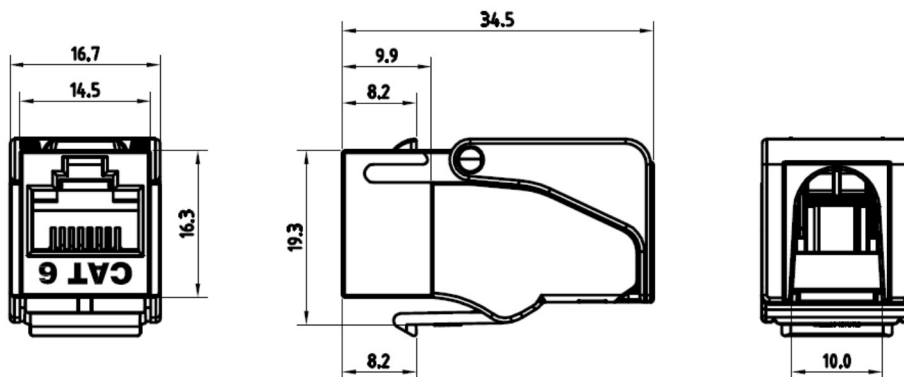

Copper Jack

Cat 6 unshielded_toolless

Ordering information

Description	Item number	Comment
Category 6 jack 90 degree unshielded, toolless jack, black, component level	85067214	
Category 6 jack 90 degree unshielded, toolless jack, white, component level	85066494	
Category 6 jack 90 degree unshielded, toolless jack, office white, component level	85087836	
Category 6 jack 90 degree unshielded, toolless jack, alpinc white, component level	85087837	
Category 6 jack 90 degree unshielded, toolless jack, red, component level	85087838	
Category 6 jack 90 degree unshielded, toolless jack, grey, component level	85087839	
Category 6 jack 90 degree unshielded, toolless jack, yellow, component level	85080906	
Category 6 jack 90 degree unshielded, toolless jack, blue, component level	85087840	
Category 6 jack 90 degree unshielded, toolless jack, green, component level	85087841	
Category 6 jack 90 degree unshielded, toolless jack, orange, component level	85087842	
Category 6 jack 90 degree unshielded, toolless jack, ivory, component level	85087843	
Category 6 jack 90 degree unshielded, toolless jack, light ivory, component level	85087844	

Related documents

Description	Document number
User manual for installation	DOC-0000716393

Additional information

Description	
Microsite for Data Center solution	datacenter.hubersuhner.com