

PowerSUM D8PS Stranded Cordage Modular Patch Cord, Yellow Jacket

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	SYSTIMAX®
Product Type	Twisted pair patch cord
Product Brand	PowerSUM
Product Series	CPC

General Specifications

ANSI/TIA Category	5e
Cable Type	U/UTP (unshielded)
Conductor Type	Stranded
Interface, Connector A	RJ45 plug
Interface Feature, connector A	Standard
Interface, Connector B	RJ45 plug
Interface Feature, connector B	Standard
Jacket Color	Yellow
Pairs, quantity	4
Wiring	T568B

Dimensions

Cable Assembly Length, minimum (ft)	1
Cable Assembly Length, maximum (ft)	100
Cable Assembly Length, minimum (m)	1
Cable Assembly Length, maximum (m)	30

CPC6642-09 | D8PS-YL

Wiring Diagram

	Connector A	Connector B
Position 1	White/Orange	White/Orange
Position 2	Orange	Orange
Position 3	Lt. Green	Lt. Green
Position 4	Blue	Blue
Position 5	Lt. Blue	Lt. Blue
Position 6	Green	Green
Position 7	Lt. Brown	Lt. Brown
Position 8	Brown	Brown

Electrical Specifications

dc Resistance, maximum	0.3 ohm
Safety Voltage Rating	300 V

Ordering Tree

CPC-

9

10

11

12

0

1

F

0

5

0

Outlet Color	
9	0 Not applicable
	1 Black
	2 Blue
	3 Gray
	4 Green
	5 Ivory
	6 Orange
	7 Red
	8 White
	9 Yellow
B	Lilac

Jacket Color	
10	1 Black
	2 Light blue
	3 Dark gray
	4 Spring green
	5 Ivory
	6 Orange
	7 Red
	8 White
	9 Yellow
	B Lilac
C	Gray
	K Pink
	L Violet
	M Green
	Z Blue

UOM		
11	F	Foot
	M	Meter
	N	Inch
	C	Centimeter

Length	
12	XXX

- Notes
- Cords > 1m are authorized for use in channels and are an effective standalone method used to connect active devices
 - Cords < 1m are also valid elements for use in a channel or as an equipment interconnect but due to their limited length are not guaranteed to meet component compliance requirements that were developed to assess the quality of longer cords

Material Specifications

Contact Plating Material	Precious metals
--------------------------	-----------------

CPC6642-09 | D8PS-YL

Material Type Copper alloy | Polycarbonate

Mechanical Specifications

Plug Insertion Life, minimum 750 times
Plug Retention Force, minimum 133 N | 29.9 lbf

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space Non-plenum
Flammability Rating UL 94 V-0
Safety Standard Anatel | ETL | cETL

Packaging and Weights

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



Included Products

848482352 — PowerSUM 1074D Category 5e U/UTP Cable, non-plenum, yellow jacket, 4 pair count, variable length, reel
1074D YL 4/24 RVAR

PowerSUM 1074D Category 5e U/UTP Cable, non-plenum, yellow jacket, 4 pair count, variable length, reel

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	SYSTIMAX®
Product Type	Twisted pair cable
Product Brand	PowerSUM


General Specifications

Product Number	1074D
ANSI/TIA Category	5e
Cable Component Type	Cordage
Cable Type	U/UTP (unshielded)
Conductor Type, singles	Stranded
Conductors, quantity	8
Jacket Color	Yellow
Pairs, quantity	4
Transmission Standards	ANSI/TIA-568.2-D CENELEC EN 50288-3-1 ISO/IEC 11801 Class D

Dimensions

Cable Length, special	Variable length
Diameter Over Jacket, nominal	5.715 mm 0.225 in
Jacket Thickness	0.559 mm 0.022 in
Conductor Gauge, singles	24 AWG

Cross Section Drawing

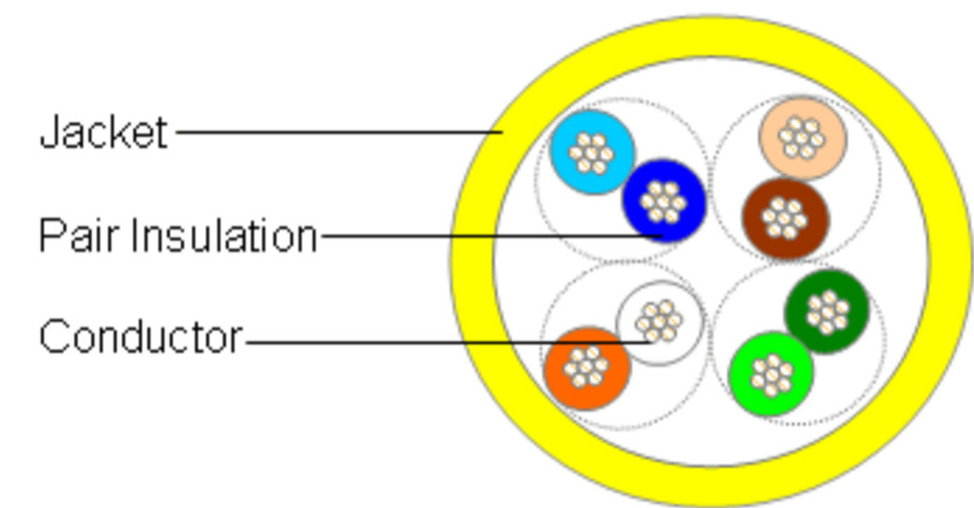

Electrical Specifications

dc Resistance Unbalance, maximum	5 %
dc Resistance, maximum	9.38 ohms/100 m 2.859 ohms/100 ft
Dielectric Strength, minimum	1500 Vac 2500 Vdc
Mutual Capacitance at Frequency	5.6 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	69 %
Operating Frequency, maximum	200 MHz
Operating Voltage, maximum	80 V
Remote Powering	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A
Safety Voltage Rating	300 V

Material Specifications

Conductor Material	Tinned copper
Insulation Material	Polyolefin
Jacket Material	PVC

Mechanical Specifications

Pulling Tension, maximum	11.34 kg 25 lb
--------------------------	------------------

Environmental Specifications

Installation temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Environmental Space	Non-plenum
Flame Test Method	CM

Packaging and Weights

Cable weight	36.014 kg/km 24.2 lb/kft
Packaging Type	Reel

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant

