

Data sheet

OpDAT AP 1xLC-D SM APC (ceramic) pure white

Page 1/4

P/N

1501207K1A-E

EAN 4251122199080


2019/06/19

Version: K


Illustrations



Dimensional drawing

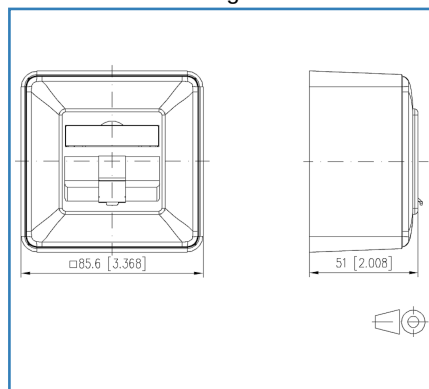

Cut-out

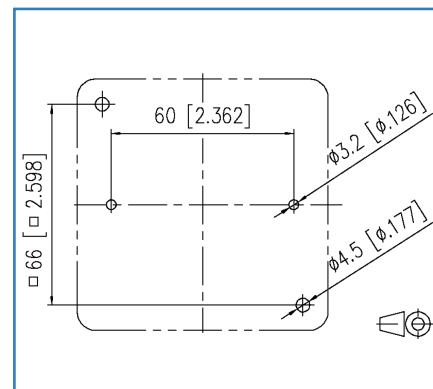

See enlarged drawings at the end of document

Product specification

- surface-mounted termination unit 85 x 85 x 43 mm
- equipped with OpDAT modul LC-D SM APC adapter (green) with adapter
- slotted ceramic sleeve
- service life min. 1000 mating cycles
- module plug direction 45° downwards
- strain relief of the Kevlar by screw at the module frame
- velcro tape to bundle the fiber reserve
- with label window for enclosed identification labels
- label sheet 209 x 294 mm see accessory
- integrated dust protection covers (also colored)
- cover parts in pure white RAL 9010, structured surface with matt finish



OpDAT AP 1xLC-D SM APC (ceramic) pure white

P/N

1501207K1A-E

EAN 4251122199080

2019/06/19

Version: K

Technical Data

General Data

Fields of application	
Field of application	Office
Design	wall outlet
Mounting style	surface mount
Transmission technology	Fiber optic
Color	Pure white
Dimensions	
Dimension	51 mm x 85.6 mm x 85.6 mm
Dimension	2.008 in. x 3.37 in. x 3.37 in.
Modularity	yes
Mode type of the fiber	Single mode
Labeling option	label window with identification label

Connections/interfaces

Connector technology interface 1	LC-D
Connector technology interface 2	LC-D
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Module plug-in direction	45° downwards

Mechanical characteristics

Cut-out	module
Life - Number of mating cycles	min. 1000
Position/mounting of latch - standard installation position	top

Materials and material properties

Material - Surface mount frame	ABS, impact resistant
Material - Supporting frame	GD-Zn (zinc die-cast)
Material - Label window	ABS, transparent
Material - Coupler housing	Plastics
Material - Sleeve	ceramic, slotted
RoHS	compliant



OpDAT AP 1xLC-D SM APC (ceramic) pure white

P/N

1501207K1A-E

EAN 4251122199080

2019/06/19

Version: K

Technical Data

Classifications

ETIM 7.0

EC001409

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension	133 mm x 95 mm x 52 mm
Packaging dimension	5.236 in. x 3.74 in. x 2.047 in.



P | Cabling

Data sheet

OpDAT AP 1xLC-D SM APC (ceramic) pure white

Page 4/4

P/N

1501207K1A-E


EAN 4251122199080

2019/06/19

Version: K

Illustrations

Dimensional drawing

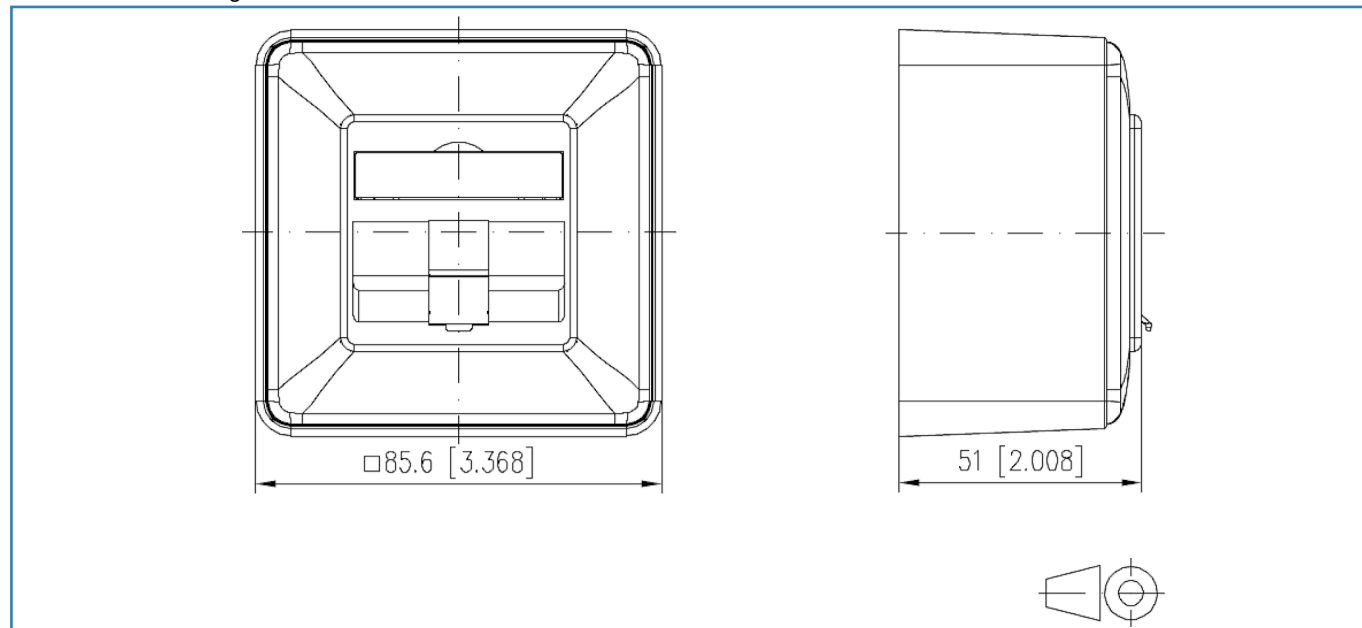

Cut-out

