

P | Cabling

Data sheet

OpDAT PF patch panel unequipped
for 12xSC-D/LC-Q/ST-D, gray

Page 1/6

P/N

1502005200-E

EAN 4250184108214


2021/08/30

Version: T

Illustrations



Dimensional drawing

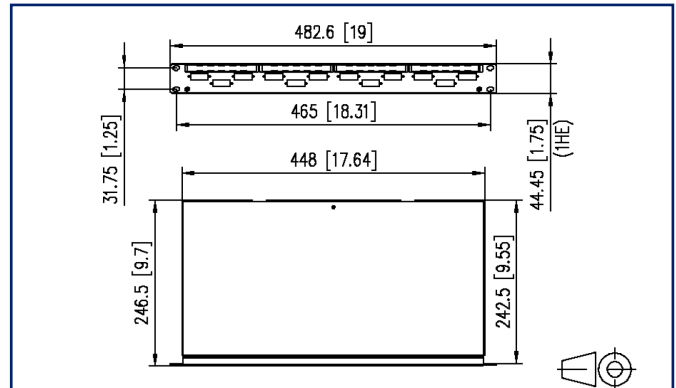

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- unequipped
- light construction with aluminum front plate and housing
- removable front plate for easy adapter mounting
- 10 possible cable entries in the rear panel for 4x PG13.5, 2x PG16/M20 or 2x PG21/M25 cable glands and for two pre-terminated installation cables (VIK)
- snap-on cover for easy access during service work
- label windows for enclosed identification labels
- accepts up to 4 splice trays and 1 splice tray cover

variants

24x LC-D
12x SC-D
24x ST

suitable cutouts

LC-D, SC simplex, E2000 simplex
SC-D, LC-Q
ST



P | Cabling

Data sheet

Page 2/6

OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

P/N

1502005200-E

EAN 4250184108214

2021/08/30

Version: T

Technical Data

General Data

Fields of application

Office
Data center

Design

patch panel

Color

anodized alu.

Dimensions

Dimension (L x W x H)

246.5 mm x 482.6 mm x 44.45 mm

Dimension (L x W x H)

9.705 in. x 19 in. x 1.75 in.

Inches

19 inches

Height unit

1RU

Labeling option

label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1

SC-D

Number of ports interface 1

12

Number of equipped ports interface 1

0

Connector technology interface 2

SC-D

Number of ports interface 2

12

Number of ports interface 2 equipped

0

Cable sheath diameter (min. - max.)

Cable sheath diameter

3 mm - 20.00

Cable sheath diameter

0.118 in. - 0.787

Cable access/outlet

several possibilities for cable entry on the back

Mechanical data

Cut-out

SC-D, LC-Q, ST-D

strain relief

cable tie

Materials and material properties

Material - Housing

Al (Aluminium)

Material - Front cover

Al (Aluminium)

Material - Front cover finish

anodized

Material - Cover

Al (Aluminium)

RoHS

compliant



P | Cabling

Data sheet

OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

Page 3/6

P/N

1502005200-E

EAN 4250184108214

2021/08/30

Version: T

Technical Data

Materials and material properties

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC002006
ETIM 8.0	EC002006

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	1755 g
Packaging unit - Weight (pound)	3.87 lb
Packaging dimension	540 mm x 380 mm x 60 mm
Packaging dimension	21.26 in. x 14.961 in. x 2.362 in.



P | Cabling

Data sheet

Page 4/6

OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

P/N

1502005200-E

EAN 4250184108214

2021/08/30

Version: T

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
1502500000-E	OpDAT PF/fix patch cord tray gray
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7 to 12 mm)
150811M25-E	Cable gland M25
15090041-I	OpDAT ST-D Kupplung MM (Ph-Br, metallisch)
15090051-I	OpDAT ST-D adapter MM (ceramic, metallike)
15090052-30	OpDAT SC-D adapter OM2 (metallike) - 30 pieces
15090052-I	OpDAT SC-D adapter OM2 (metallike)
15090053-I	OpDAT ST-D/SC-D adapter MM (ceramic, metallike)
15090071-30	OpDAT LC-Q adapter OS2 (blue) - 30 pieces
15090071-I	OpDAT LC-Q adapter OS2 (blue)
15090072-I	OpDAT LC-Q Kupplung MM (Ph-Br, beige)
15090078-30	OpDAT LC-Q adapter OM3 (aqua) - 30 pieces
15090078-I	OpDAT LC-Q adapter OM3 (aqua)
15090079-30	OpDAT LC-Q adapter OM4 (violet) - 30 pieces
15090079-I	OpDAT LC-Q adapter OM4 (violet)
1509007A-30	OpDAT LC-Q APC adapter OS2 (green) - 30 pieces
1509007A-I	OpDAT LC-Q APC adapter OS2 (green)
150900B2-30	OpDAT SC-D adapter OM2 (beige) - 30 pieces
150900B2-I	OpDAT SC-D adapter OM2 (beige)
150900BA-30	OpDAT SC-D adapter OM3 (aqua) - 30 pieces
150900BA-I	OpDAT SC-D adapter OM3 (aqua)
150900BB-30	OpDAT SC-D adapter OM4 (violet) - 30 pieces
150900BB-I	OpDAT SC-D adapter OM4 (violet)
150900C2-I	OpDAT SC-D Kupplung MM (Ph-Br, metallisch)
150900C3-I	OpDAT SC-D/ST-D Kupplung MM (Ph-Br, metallisch)
150900D2-30	OpDAT SC-D adapter OS2 (metallike+blue) - 30 pieces
150900D2-I	OpDAT SC-D adapter OS2 (metallike+blue)
150900D3-30	OpDAT ST-D/SC-D adapter OS2 (metallike/blue) - 30 pieces
150900D3-I	OpDAT ST-D/SC-D adapter OS2 (metallike/blue)
150900D4-30	OpDAT SC-D APC adapter OS2 (metallike+green)- 30 pieces
150900D4-I	OpDAT SC-D APC adapter OS2 (metallike+green)
150900E2-30	OpDAT SC-D adapter OS2 (blue) - 30 pieces

P | Cabling

Data sheet

Page 5/6

OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

P/N

1502005200-E

EAN 4250184108214

2021/08/30

Version: T

Accessories

150900E2-I	OpDAT SC-D adapter OS2 (blue)
150900F2-30	OpDAT SC-D APC adapter OS2 (green) - 30 pieces
150900F2-I	OpDAT SC-D APC adapter OS2 (green)
1509010000-E	OpDAT splice tray for 12 splices unequipped
150922EO00-E	""OpDAT vorkonfektionierte Spleißkassette 12xSC PC OM2 mit Crimpspleißschutz""
150925EO00-E	""OpDAT vorkonfektionierte Spleißkassette 12xSC PC OM3 für Crimpspleißschutz""
150929EO00-E	OpDAT pre-assembled splice tray 12xSC UPC OS2 with crimp splice protection
899011-01	Label sheet for Modul patch panels / REG
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels

P | Cabling

Data sheet

OpDAT PF patch panel unequipped
for 12xSC-D/LC-Q/ST-D, gray

Page 6/6

P/N

1502005200-E

EAN 4250184108214

2021/08/30

Version: T

Illustrations

Dimensional drawing

