

P | Cabling

Data sheet

OpDAT PA patch panel VIK
24xST-S (metal), SM+MM, gray


Page 1/5

P/N
1502200124-E
EAN 4250184108764
2021/09/27
Version: T

Illustrations



Dimensional drawing

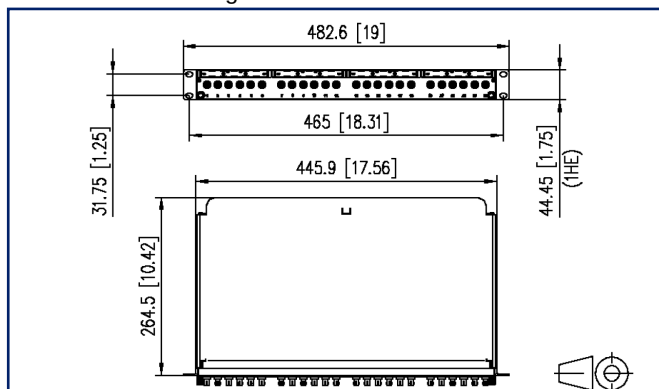

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover
- equipped with ST adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light aluminum construction
- unused cutouts are closed by blank plugs
- splice tray of withdrawable patch panel tilts and is completely removable to facilitate fitting (end stop)
- variable cable entry (straight / inclined) from both sides possible
- cable arrest with supplied cable tie or optional cable screw gland also possible
- cable diameter from 3 to 20 mm
- strain relief for central element / Kevlar
- cable management by means of freely positionable guide elements
- screwless cover
- label windows for enclosed identification labels
- variants: equipped with 12 or 24 ST adapters each made of metal (SM+MM)



P | Cabling

Data sheet

OpDAT PA patch panel VIK 24xST-S (metal), SM+MM, gray

Page 2/5

P/N

1502200124-E

EAN 4250184108764

2021/09/27

Version: T

Technical Data

General Data

Fields of application

Structured building cabling, Office
Data center

Design patch panel

Mounting style 1RU

Transmission technology Fiber optic

Port numbering yes

Color metallike

Dimensions

Dimension (L x W x H) 264.5 mm x 482.6 mm x 44.45 mm

Dimension (L x W x H) 10.413 in. x 19 in. x 1.75 in.

Inches 19 inches

Height unit 1RU

Installation depth 265 mm

Installation depth 10.433 in.

Mode type of the fiber Singlemode + Multimode

Labeling option label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1 ST-S Couplers

Connector technology interface 2 ST-S Couplers

Number of ports interface 1 24

Number of ports interface 2 24

Number of equipped ports interface 1 24

Number of ports interface 2 equipped 24

Number of ports with dust protection interface 1 24

Number of ports with dust protection interface 2 24

Cable access/outlet variable, straight / inclined, from both sides possible

Mechanical data

Cut-out ST

Connector type simplex

Life - Number of mating cycles min. 2000

strain relief yes



P | Cabling

Data sheet

Page 3/5

OpDAT PA patch panel VIK 24xST-S (metal), SM+MM, gray

P/N

1502200124-E

EAN 4250184108764

2021/09/27

Version: T

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	metal
RoHS	compliant

Classifications

ETIM 6.0	EC001130
ETIM 7.0	EC001130
ETIM 8.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension	523 mm x 361 mm x 45 mm
Packaging dimension	20.591 in. x 14.213 in. x 1.772 in.



P | Cabling

Data sheet

Page 4/5

OpDAT PA patch panel VIK
24xST-S (metal), SM+MM, gray

P/N

1502200124-E

EAN 4250184108764

2021/09/27

Version: T

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7 to 12 mm)
150811M25-E	Cable gland M25
899011-01	Label sheet for Modul patch panels / REG
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels

P | Cabling

Data sheet

Page 5/5

OpDAT PA patch panel VIK
24xST-S (metal), SM+MM, gray

P/N

1502200124-E

EAN 4250184108764

2021/09/27

Version: T

Illustrations

Dimensional drawing

