

P | Cabling

Data sheet

OpDAT PA patch panel unequipped
for 24xLC-D/SC-S/E2000, gray

Page 1/6

P/N

1502200200-E

EAN 4250184113416


2021/09/27

Version: R

Illustrations



Dimensional drawing

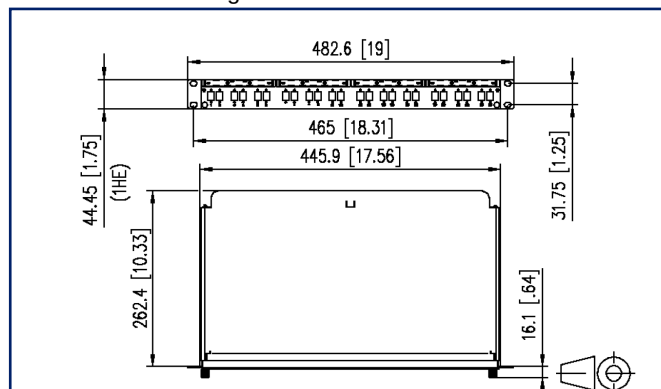

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover
- splice tray can be removed completely for better mounting (pull-out stop)
- light aluminum construction
- unequipped
- variable cable entry (straight / inclined) from both sides possible
- cable support by means of cable ties or cable gland (accessories)
- cable diameter from 3 to 20 mm
- strain relief for central element / Kevlar
- cable management by means of freely positionable guide elements
- snap-on cover for easy access during service work
- label window for enclosed identification labels

Variants

recesses for

24x LC-D

LC-D, SC simplex, E2000 simplex

12x SC-D

SC-D, LC-Q

24x ST

ST



P | Cabling

Data sheet

Page 2/6

OpDAT PA patch panel unequipped for 24xLC-D/SC-S/E2000, gray

P/N

1502200200-E

EAN 4250184113416

2021/09/27

Version: R

Technical Data

General Data

Fields of application	Office Data center
Design	patch panel
Mounting style	1RU
Color	anodized alu.
Dimensions	
Dimension (L x W x H)	262.5 mm x 482.6 mm x 44.45 mm
Dimension (L x W x H)	10.335 in. x 19 in. x 1.75 in.
Inches	19 inches
Height unit	1RU
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Number of ports interface 1	24
Number of equipped ports interface 1	0
Number of ports interface 2	24
Number of ports interface 2 equipped	0
Cable sheath diameter (min. - max.)	
Cable sheath diameter	3 mm - 20.00
Cable sheath diameter	0.118 in. - 0.787
Cable access/outlet	straight or inclined, on the rear, from the left and right

Mechanical data

Cut-out	SC, LC-D, E2000
strain relief	cable tie

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Front cover finish	anodized
Material - Cover	Al (Aluminium)
RoHS	compliant



P | Cabling

Data sheet

Page 3/6

OpDAT PA patch panel unequipped for 24xLC-D/SC-S/E2000, gray

P/N

1502200200-E

EAN 4250184113416

2021/09/27

Version: R

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C -40 °C - 70 °C

Temperature - Storage °F -40 °F - 158 °F

Temperature - Operating °C -40 °C - 70 °C

Temperature - Operating °F -40 °F - 158 °F

Classifications

ETIM 5.0 EC001130

ETIM 6.0 EC001130

ETIM 7.0 EC002006

ETIM 8.0 EC002006

Packing details

Type of packaging 1 pc(s) / box

Packaging unit - Weight (gram) 2190 g

Packaging unit - Weight (pound) 4.83 lb

Packaging dimension 523 mm x 361 mm x 45 mm

Packaging dimension 20.591 in. x 14.213 in. x 1.772 in.



P | Cabling

Data sheet

Page 4/6

OpDAT PA patch panel unequipped for 24xLC-D/SC-S/E2000, gray

P/N

1502200200-E

EAN 4250184113416

2021/09/27

Version: R

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7 to 12 mm)
150811M25-E	Cable gland M25
15090057-I	OpDAT E2000 adapter OM2 (beige)
15090058-I	OpDAT E2000 adapter OS2 (blue)
15090059-I	OpDAT E2000 APC adapter OS2 (green)
15090073-I	OpDAT LC-D Kupplung MM (Ph-Br, beige)
15090074-50	OpDAT LC-D adapter OS2 (blue) - 50 pieces
15090074-I	OpDAT LC-D adapter OS2 (blue)
15090075-50	OpDAT LC-D adapter OM4 (violet) - 50 pieces
15090075-I	OpDAT LC-D adapter OM4 (violet)
15090076-I	OpDAT LC-D APC adapter OS2 (green)
15090077-I	OpDAT LC-D adapter OM3 (aqua)
1509010000-E	OpDAT splice tray for 12 splices unequipped
150922EO00-E	""OpDAT vorkonfektionierte Spleißkassette 12xSC PC OM2 mit Crimpspleißschutz""
150922JO00-E	""OpDAT vorkonfektionierte Spleißkassette 12xLC PC OM2 mit Crimpspleißschutz""
150925EO00-E	""OpDAT vorkonfektionierte Spleißkassette 12xSC PC OM3 für Crimpspleißschutz""
150925JO00-E	""OpDAT vorkonfektionierte Spleißkassette 12xLC PC OM3 für Crimpspleißschutz""
150929EO00-E	OpDAT pre-assembled splice tray 12xSC UPC OS2 with crimp splice protection
150929JO00-E	OpDAT pre-assembled splice tray 12xLC UPC OS2 with crimp splice protection
150929MA00-E	OpDAT pre-assembled splice tray 12xE2000 APC OS2 with crimp splice protection
150929MO00-E	OpDAT pre-assembled splice tray 12xE2000 UPC OS2 with crimp splice protection
899011-01	Label sheet for Modul patch panels / REG
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels



P | Cabling

Data sheet

Page 5/6

OpDAT PA patch panel unequipped for 24xLC-D/SC-S/E2000, gray

P/N

1502200200-E

EAN 4250184113416

2021/09/27

Version: R

Accessories from

P/N	Designation
15090076-50	OpDAT LC-D APC adapter OS2 (green) - 50 pieces
15090077-50	OpDAT LC-D adapter OM3 (aqua) - 50 pieces

P | Cabling

Data sheet

**OpDAT PA patch panel unequipped
for 24xLC-D/SC-S/E2000, gray**

Page 6/6

P/N

1502200200-E

EAN 4250184113416

2021/09/27

Version: R

Illustrations

Dimensional drawing

