

P | Cabling

Data sheet

OpDAT PA patch panel VIK
12xLC-D (aqua), OM3, gray


Page 1/5

P/N
1502207712-E
EAN 4251122180712
 2021/09/27
 Version: U

Illustrations



Dimensional drawing

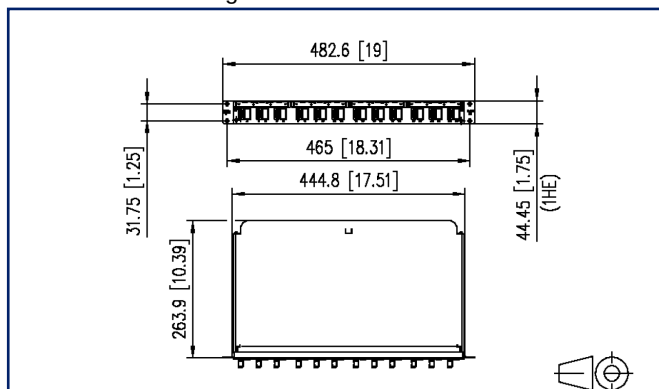

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover
- equipped with LC-D adapters
- prepared for fixation of pre-terminated installation cables (OpDAT VIK)
- light aluminum construction
- unused cutouts are closed by blank plugs
- splice tray of withdrawable patch panel tilts and is completely removable to facilitate fitting (end stop)
- variable cable entry (straight / inclined) from both sides possible
- cable arrest with supplied cable tie or optional cable screw gland also possible
- cable diameter from 3 to 20 mm
- strain relief for central element / Kevlar
- cable management by means of freely positionable guide elements
- screwless cover
- label windows for enclosed identification labels
- variants: equipped with 6, 12 or 24 LC-D adapters, all blue (OS2), lime green (OM5), violet (OM4) or aqua (OM3) or with 6, 12 or 24 LC-D APC adapters, all green (OS2)



P | Cabling

Data sheet

OpDAT PA patch panel VIK 12xLC-D (aqua), OM3, gray

Page 2/5

P/N

1502207712-E

EAN 4251122180712

2021/09/27

Version: U

Technical Data

General Data

Fields of application

	Structured building cabling, Office Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	aqua
Dimensions	
Dimension (L x W x H)	263.9 mm x 482.6 mm x 44.45 mm
Dimension (L x W x H)	10.39 in. x 19 in. x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	265 mm
Installation depth	10.433 in.
Fiber class	OM3: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.2
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1	LC-D Couplers
Connector technology interface 2	LC-D Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12
Number of blind	12
Cable access/outlet	variable, straight / inclined, from both sides possible



P | Cabling

Data sheet

OpDAT PA patch panel VIK 12xLC-D (aqua), OM3, gray

Page 3/5

P/N

1502207712-E

EAN 4251122180712

2021/09/27

Version: U

Technical Data

Mechanical data

Cut-out	SC, LC-D, E2000
Connector type	duplex
strain relief	yes

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
RoHS	compliant

Classifications

ETIM 7.0	EC001130
ETIM 8.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension	540 mm x 380 mm x 60 mm
Packaging dimension	21.26 in. x 14.961 in. x 2.362 in.



P | Cabling

Data sheet

**OpDAT PA patch panel VIK
12xLC-D (aqua), OM3, gray**

Page 4/5

P/N

1502207712-E

EAN 4251122180712

2021/09/27

Version: U

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7 to 12 mm)
150811M25-E	Cable gland M25
899011-01	Label sheet for Modul patch panels / REG
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels

P | Cabling

Data sheet

OpDAT PA patch panel VIK
12xLC-D (aqua), OM3, gray

Page 5/5

P/N

1502207712-E

EAN 4251122180712

2021/09/27

Version: U

Illustrations

Dimensional drawing

