

Data sheet


OpDAT PA patch panel splice 12xLC-D (lime green), OM5, gray

Page 1/5


P/N
1502287M12-E
EAN 4251394607283

2018-16-01

Illustrations

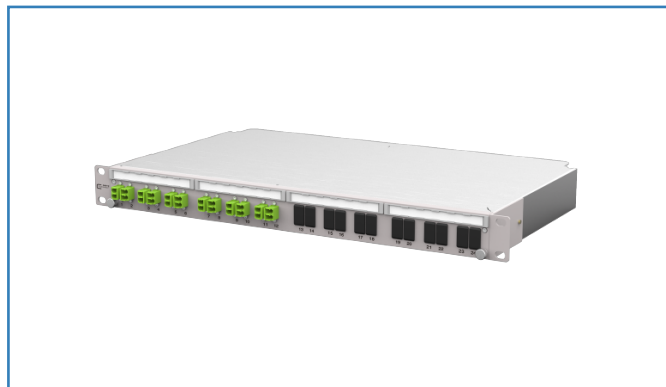

Dimensional drawing

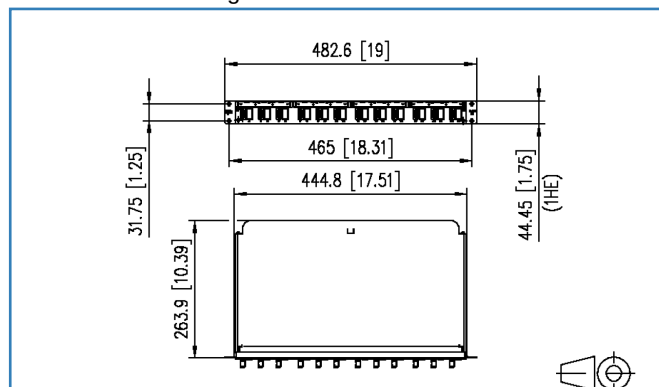

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover
- equipped with LC-D adapters and LC pigtails
- pigtails with semi-tight buffered fiber dia. 0.9 mm, 12 colors, secondary and primary coating in the same color, length 2.0 m
- pigtails inserted and stripped in standard splice trays with crimp splice holders
- pigtails are cleaned and plugged in adapters
- splice tray of withdrawable patch panel tilts and is completely removable to facilitate fitting (end stop)
- light aluminum construction
- unused cutouts are closed by blank plugs
- variable cable entry (straight / inclined) from both sides possible
- cable support by supplied cable tie or optional cable gland (accessory)
- cable diameter from 3 to 20 mm
- strain relief for central element / Kevlar
- cable management by cable guides to be positioned as required
- screwless cover
- label windows for enclosed identification labels
- variants: equipped with 6, 12 or 24 LC-D adapters and pigtails, all blue (OS2), lime green (OM5), violet (OM4), aqua (OM3) or 6, 12 or 24 LC-D APC adapters and pigtails green (OS2)



Data sheet

Page 2/5

OpDAT PA patch panel splice 12xLC-D (lime green), OM5, gray

P/N

1502287M12-E

EAN 4251394607283

2018-16-01

Technical Data

General Data

Fields of application

	Office
	Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	lime green
Dimensions	
Dimension (L x W x H)	260.90 x 482.60 x 44.45 mm
Dimension (L x W x H)	10.272 x 19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	265.00 mm
Installation depth	10.433 in.
Number of cables/ cores	24
Cable Type	pigtail(s)
Fiber class	OM5: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.4
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1	LC-D Couplers
Connector technology interface 2	LC-D Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 2	12
Number of blind covers interface 2	12
Semi-tight buffered fiber pigtail length	2.00 m
Semi-tight buffered fiber pigtail length	6.56 ft
Semi-tight buffered fiber pigtail diameter	0.90 mm
Semi-tight buffered fiber pigtail diameter	0.035 in.



Data sheet

OpDAT PA patch panel splice 12xLC-D (lime green), OM5, gray

Page 3/5

P/N
1502287M12-E
EAN 4251394607283

2018-16-01

Technical Data

Connections/interfaces

Cable access/outlet	variable, straight / inclined, from both sides possible
---------------------	---

Optical characteristics

Insertion loss	max. 0.4 dB
Return loss	min. 35 dB

Mechanical characteristics

Cut-out	SC, LC-D, E2000
Connector type	Duplex
Life - Number of mating cycles	min. 1000
strain relief	yes

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-20
Optical fibers: Product specifications	
Sectional specification for category A1 multimode fibres	ISO/IEC 60793-2-10 (A1a.4)
Optical fibers - Interconnecting devices and passive components - basic test and measuring methods	
Fibre optic interconnecting devices and passive components	IEC 61300-3-4
Fibre optic interconnecting devices and passive components	IEC 61300-3-6
Fibre optic interconnecting devices and passive components	IEC 61300-3-35
Standard colours for insulation for low-frequency cables & wires	IEC 60304



P | Cabling

Data sheet

Page 4/5

OpDAT PA patch panel splice 12xLC-D (lime green), OM5, gray

P/N

1502287M12-E

EAN 4251394607283

2018-16-01

Technical Data

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	1800.00 g
Packaging unit - Weight (pound)	3.97 lb
Packaging dimension (W x H x D)	523.00 x 361.00 x 45.00 mm
Packaging dimension (W x H x D)	20.591 x 14.213 x 1.772 in.



P | Cabling

Data sheet

OpDAT PA patch panel splice 12xLC-D (lime green), OM5, gray

Page 5/5

P/N

1502287M12-E

EAN 4251394607283

2018-16-01

Illustrations

Dimensional drawing

