

Data sheet

**OpDAT fix patch panel unequipped
for 24xLC-D/SC-S/E2000, gray**

Page 1/5

P/N

1502507300-E


EAN 4250184125037

2018-05-03

Illustrations



Dimensional drawing

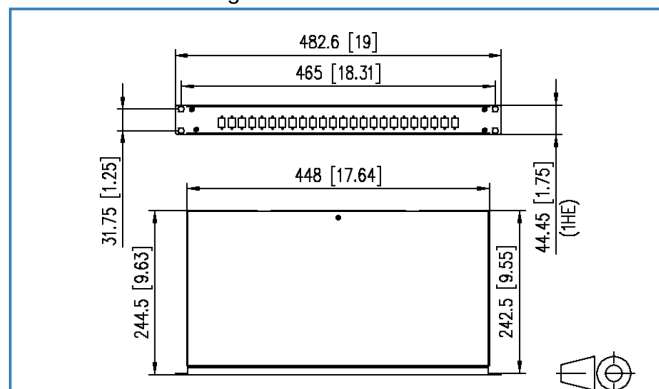

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- unequipped
- light aluminum construction with steel sheet front plate painted (gray or black)
- removable front plate for easy adapter mounting
- screwed on cover for easy access during service work
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)

variants:

24x LC-D

24x SC-D

24x E2000-D

matching cutouts

LC-D, SC-S, E2000-S

SC-D, LC-Q, ST-D

E2000-D



Data sheet

Page 2/5

OpDAT fix patch panel unequipped for 24xLC-D/SC-S/E2000, gray

P/N

1502507300-E

EAN 4250184125037

2018-05-03

Technical Data

General Data

Fields of application

Office
Data center
patch panel

Design

Color

gray

Dimensions

Dimension (L x W x H)

244.50 x 482.60 x 44.45 mm

Dimension (L x W x H)

9.626 x 19.00 x 1.75 in.

Inches

19 inches

Height unit

1RU

Installation depth

243.00 mm

Installation depth

9.567 in.

Labeling option

printed numbers

Connections/interfaces

Number of ports interface 1

24

Number of equipped ports interface 1

0

Number of ports interface 2

24

Number of ports interface 2 equipped

0

Cable access/outlet

several possibilities for cable entry on the back

Mechanical characteristics

Cut-out

SC, LC-D, E2000

Materials and material properties

Material - Housing

Al (Aluminium)

Material - Front cover

sheet steel

Material - Cover

Al (Aluminium)

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C

-40 - 70 °C

Temperature - Storage °F

-40 - 158 °F

Temperature - Operating °C

-40 - 70 °C

Temperature - Operating °F

-40 - 158 °F



Data sheet

Page 3/5

OpDAT fix patch panel unequipped for 24xLC-D/SC-S/E2000, gray

P/N

1502507300-E

EAN 4250184125037

2018-05-03

Technical Data

Approvals

RoHS compliant

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	1500.00 g
Packaging unit - Weight (pound)	3.31 lb
Packaging dimension (W x H x D)	580.00 x 405.00 x 70.00 mm
Packaging dimension (W x H x D)	22.835 x 15.945 x 2.756 in.



Data sheet

Page 4/5

OpDAT fix patch panel unequipped for 24xLC-D/SC-S/E2000, gray

P/N

1502507300-E

EAN 4250184125037

2018-05-03

Accessories

P/N	Designation
1509010000-E	OpDAT splice tray for 12 splices unequipped
15090073-I	OpDAT LC-D Kupplung MM (Ph-Br, beige)
15090074-I	OpDAT LC-D adapter OS2 (blue)
15090077-I	OpDAT LC-D adapter OM3 (aqua)
15090075-I	OpDAT LC-D adapter OM4 (violet)
15090076-I	OpDAT LC-D APC adapter OS2 (green)
15090057-I	OpDAT E2000 adapter OM2 (beige)
15090058-I	OpDAT E2000 adapter OS2 (blue)
15090059-I	OpDAT E2000 APC adapter OS2 (green)
150922EO00-E	OpDAT vorkonfektionierte Spleißkassette 12xSC PC OM2 mit Crimpspleißschutz
150925EO00-E	OpDAT vorkonfektionierte Spleißkassette 12xSC PC OM3 mit Crimpspleißschutz
150929EO00-E	OpDAT vorkonfektionierte Spleißkassette 12xSC UPC OS2 mit Crimpspleißschutz
150929JO00-E	OpDAT vorkonfektionierte Spleißkassette 12xLC UPC OS2 mit Crimpspleißschutz
150922JO00-E	OpDAT vorkonfektionierte Spleißkassette 12xLC PC OM2 mit Crimpspleißschutz
150925JO00-E	OpDAT vorkonfektionierte Spleißkassette 12xLC PC OM3 mit Crimpspleißschutz
150929MA00-E	OpDAT vorkonfektionierte Spleißkassette 12xE2000 APC OS2 mit Crimpspleißschutz
150929MO00-E	OpDAT vorkonfektionierte Spleißkassette 12xE2000 UPC OS2 mit Crimpspleißschutz
15090074-50	OpDAT LC-D adapter OS2 (blue) - 50 pieces
15090075-50	OpDAT LC-D adapter OM4 (violet) - 50 pieces



OpDAT fix patch panel unequipped for 24xLC-D/SC-S/E2000, gray

P/N

1502507300-E

EAN 4250184125037

2018-05-03

Illustrations

Dimensional drawing

