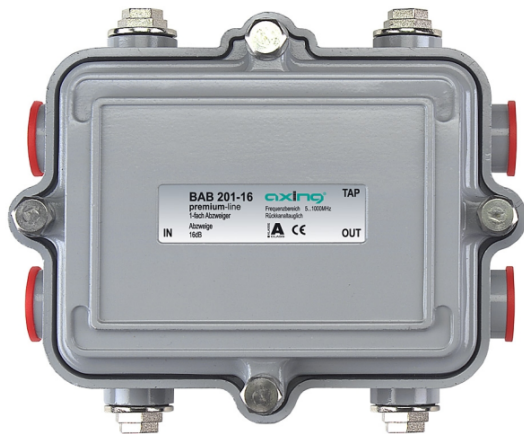


**BAB 201-16 1-way tap | 16 dB | 5...1006 MHz | outdoor**


- ✓ Tap method - directional coupler
- ✓ Trunk and tap DC/AC suitable with max. 65V~/10 A
- ✓ 5/8" Connectors
- ✓ Al die-cast housing with wall mounting bow
- ✓ Protection class IP 55

**Order information**

|                          |               |
|--------------------------|---------------|
| Type                     | BAB 201-16    |
| Order no.                | BAB20116      |
| GTIN                     | 7611682259162 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291080      |


**Technical data**

|                                     |                   |
|-------------------------------------|-------------------|
| Screening factor acc. to EN 50083-2 | > 90 dB           |
| Frequency range                     | 5...1006 MHz      |
| Tap loss                            | 16 ±1 dB          |
| Isolation                           | ≥ 25 dB           |
| Through loss                        |                   |
| 5...40 MHz                          | ≤ 1.2 dB          |
| 40...470 MHz                        | ≤ 1.5 dB          |
| 470...862 MHz                       | ≤ 1.8 dB          |
| 862...1006 MHz                      | ≤ 2.0 dB          |
| Connectors                          |                   |
| Connector type                      | 5/8"              |
| Return loss                         | ≥ 20 dB           |
| General                             |                   |
| Dimensions (W × H × D) appr.        | 140 × 120 × 80 mm |
| Weight                              | 0.719 kg          |
| Protection class                    | IP 55             |