


BSD 21-22 Extended wideband loop-through outlet 22 dB | 5...2200 MHz | CATV | SAT

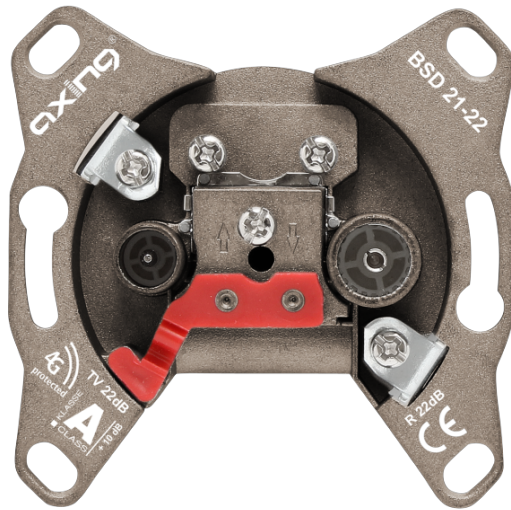

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for broadband return path
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Surface treated

Order information

Type	BSD 21-22
Order no.	BSD02122
GTIN	7611682002485
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Tap method	Directional couple + ferrite splitter
Trunk line	
Frequency range input	5...2200 MHz
Through loss @ 5...862 MHz	≤ 0.9 dB
Through loss @ 862...2200 MHz	≤ 1.8 dB
Isolation internal	≥ 20 dB
Frequency range output	5...2200 MHz
Suitable cables (Inner conductor outer diameter)	0.63...1.13 mm 4.70...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	5...2200 MHz
Tap loss	22 dB ±1.5 dB
Radio connector	
Connector type	IEC-female
Frequency range	5...2200 MHz
Tap loss	22 dB ±1.5 dB
General	
Dimensions (W × H × D) appr.	68 × 68 × 35 mm
Weight	0.092 kg

Suitable products

[TZU 21-65 Plug-on adapter | Multimedia](#)
[TZU 2-00 Cover plate | TV/R | single piece](#)
[TZU 1-00 Surface frame](#)
[TZU 2-10 Cover plate | TV/R | two-parts](#)
[TZU 1-10 Surface frame](#)
[TZU 3-00 Terminating resistor](#)