


SAB 1-20 1-fach SAT-Abzweiger | 20 dB | 5...2400 MHz

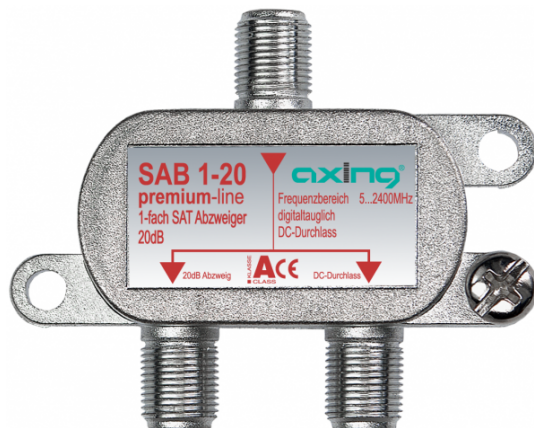

- ✓ DC power pass on trunk
- ✓ With detachable mounting brackets
- ✓ Connectors gold-plated

Order information

Type	SAB 1-20
Order no.	SAB00120
GTIN	7611682271201
PE	1
VE	1
EU customs tariff number	85291080



Technical data

Screening factor acc. to EN 50083-2	> 90 dB
Frequency range	5...2400 MHz
DC power pass	yes
Tap loss	
5...862 MHz	≤ 20 dB
Isolation	
1750...2400 MHz	≤ 23.5 dB
Through loss	
5...862 MHz	< 0.5 dB
950...1750 MHz	< 0.7 dB
1750...2400 MHz	< 2.3 dB
Directivity	
5...862 MHz	≥ 40 dB
950...1750 MHz	≥ 40 dB
1750...2400 MHz	≥ 30 dB
Return loss	
Taps @ 5...862 MHz	≥ 15 dB
Input @ 5...862 MHz	≥ 20 dB
Taps @ 950...1750 MHz	≥ 18 dB
Input @ 950...1750 MHz	≥ 20 dB
Taps @ 1750...2400 MHz	≥ 18 dB
Input @ 1750...2400 MHz	≥ 15 dB
Output @ 5...862 MHz	≥ 20 dB
Output @ 950...1750 MHz	≥ 20 dB
Output @ 1750...2400 MHz	≥ 15 dB
Connectors	
Connector type	F
General	
Dimensions (W × H × D) appr.	67 × 55 × 33 mm
Weight	0.069 kg