

SPU 98-06 Multiswitch stand-alone/cascade unit | 9 in 8 | basic-line



- ✓ For up to 8 subscribers
- ✓ Subscriber ports SAT active, terrestrial passive
- ✓ Suitable for return path
- ✓ Powered by ext. power supply SZU 99-06 (not included in delivery) or via the SAT-IF trunk lines
- ✓ Cascadable - Cascade outputs must be terminated with DC-isolated 75 Ohm terminating resistors (e.g. CFA 11-00, not included in delivery)

Order information

Type	SPU 98-06
Order no.	SPU09806
GTIN	7611682005387
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs

Number	9
Frequency range	5...862 MHz 950...2400 MHz
Max. LNB current	1500 mA

Subscriber ports

Number	8
Switch commands	13/18 V, 0/22 kHz, DiSEqC 1.0
Tap loss TERR	24 dB ±2 dB
Tap loss SAT	2...0 dB ±2 dB
Max. output level SAT (3rd order SAT EN 50083-3 35dB KMA, 2 sender test method)	102 dBμV
Current consumption per port (without LNB supply)	< 35 mA

Trunk outputs

Number	9
Through loss TERR	2...3dB ±1.5 dB
Through loss SAT	1...2 dB ±1.5dB


Connectors

Connector type	F
----------------	---

General

Current consumption	10 mA
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	202 x 128 x 63 mm
Weight	0.685 kg
Protection class	IP 20

Example of use

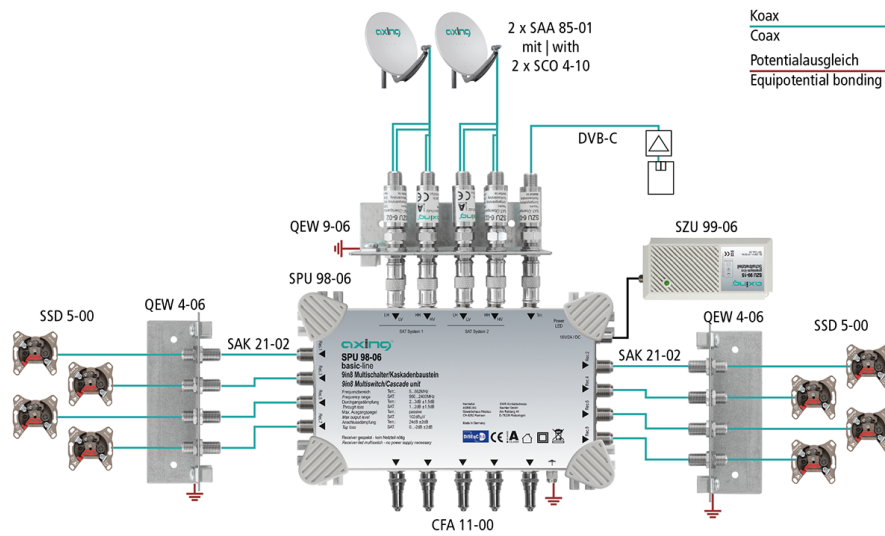

Suitable products

QEW 9-06 Earthing angle | two-rowed | surge protection

QEW 4-06 Earthing angle | single-rowed

SAK 21-02 F | Quickfix | patch cable | right-angle connectors | double shielded

SAK 41-02 F | Quickfix | patch cable | right-angle connectors | double shielded

CFA 11-00 Terminating resistor | 75 Ohm | DC isolated

CFA 4-01 Adapter F/F | Quickfix