

SPU 512-05 Multischalter | 5 in 12 | basic-line



- ✓ For up to 12 subscribers
- ✓ Active satellite path, passive terrestrial path
- ✓ Suitable for return path
- ✓ Suitable for Quad LNB
- ✓ Switching power supply

Order information


Type	SPU 512-05
Order no.	SPU51205
GTIN	7611682135138
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs	
Number	5
Frequency range	5...65 MHz 85...862 MHz 950...2200 MHz
Isolation V H.	25 dB
Isolation SAT inputs SAT inputs	30 dB
Isolation TERR SAT	50 dB
Subscriber ports	
Number	12
Tap loss TERR	20 dB
Tap loss SAT	10...6 dB
Isolation	35 dB
Max. output level SAT (3rd order SAT EN 50083-3 35dB KMA, 2 sender test method)	90 dBμV
Connectors	
Connector type	F
General	
Switching power supply	90...250 V~ 47-63 Hz 18 V=0.5 A
Power consumption	5.0 W
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	355 × 125 × 50 mm
Weight	0.790 kg
Protection class	IP 20

Example of use

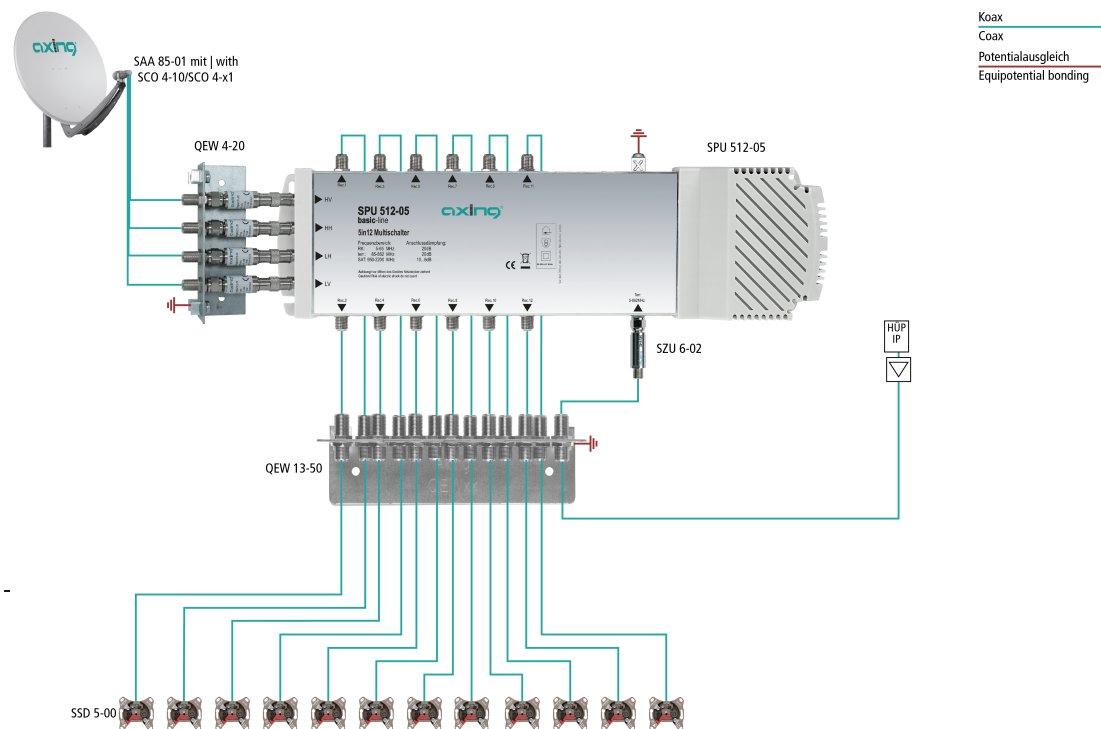

Suitable products

QEW 4-20 Earthing angle | single-rowed | surge protection