


SZU 512-06 Complete multiswitch package 5 in 12 | completely pre-assembled

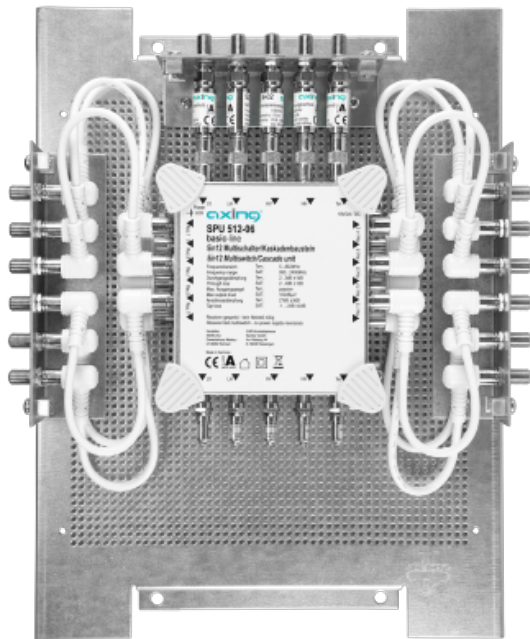

- ✓ For up to 12 subscribers
- ✓ Minimum installation time due to ready-to-operate, pre-installed system
- ✓ Service- and assembly-friendly
- ✓ With overvoltage protection and equipotential bonding at the inputs
- ✓ With equipotential bonding at subscriber outputs
- ✓ Consisting of:
 - ✓ 1 x QMP 3045 Perforated mounting plate
 - ✓ 1 x SPU 512-06 Multiswitch 5 in 12
 - ✓ 1 x QEW 5-06 Earthing angle
 - ✓ 2 x QEW 6-06 Earthing angle
 - ✓ 5 x CFA 11-00 Terminating resistor
 - ✓ 12 x SAK 21-02 Patch cable
 - ✓ Optionally available with power supply unit SZU 99-06

Order information

Type	SZU 512-06
Order no.	SZU51206
GTIN	7611682007701
PE	1
VE	1
EU customs tariff number	85291080

Technical data

Inputs

Number	5
Frequency range	5...862 MHz 950...2400 MHz
Max. LNB current	1500 mA
Isolation V H.	>30 dB
Isolation TERR SAT	30 dB

Subscriber ports

Number	12
Switch commands	13/18 V, 0/22 kHz
Tap loss SAT	-1...-2 dB ±2 dB
Max. output level SAT (3rd order SAT EN 50083 3 35dB KMA, 2 sender test method)	102 dBμV
Current consumption per port (without LNB supply)	< 35 mA

Trunk outputs

Number	5
Through loss TERR	2...3 dB ±1 dB
Through loss SAT	2...4 dB ±1 dB

Connectors

Connector type	F
----------------	---

General

Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	300 x 400 x 170 mm
Protection class	IP 20