

Data sheet

**OpDAT slide patch panel splice
12xE2000 APC (green), OS2, gray**

Page 1/5


P/N

1502695912-E


EAN 4250184175940

2018-16-01

Illustrations

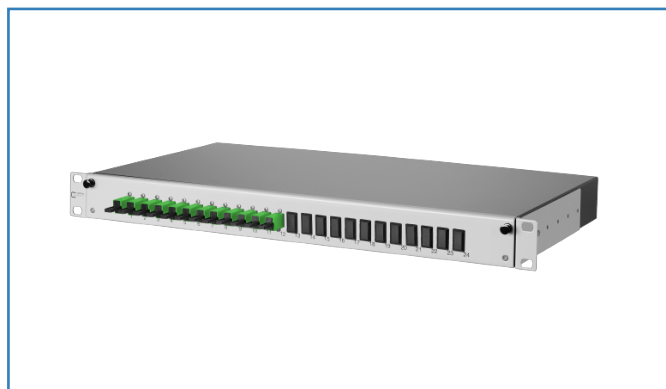

Dimensional drawing

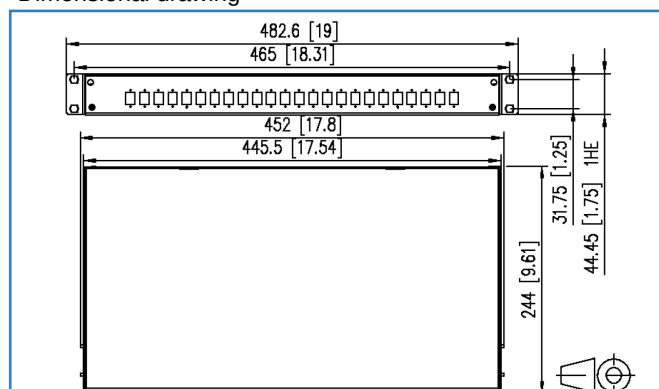

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover in RAL 7035
- equipped with E2000 adapters and E2000 pigtails
- pigtails with semi-tight buffered fiber dia. 0.9 mm, 12 colors, secondary and primary coating in the same color, length 2.0 m
- pigtails inserted and stripped in standard splice trays with crimp splice holders
- pigtails are cleaned and plugged in adapters
- splice tray can be tilted and completely removed to facilitate fitting (end stop)
- unused cutouts are closed by blank plugs
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- a PG16 mounting kit is included in delivery
- variants: equipped with 12 or 24 E2000 adapters and pigtails blue (OS2) or 12 or 24 E2000 APC adapters and pigtails green (OS2)



Data sheet

OpDAT slide patch panel splice 12xE2000 APC (green), OS2, gray

Page 2/5

P/N

1502695912-E

EAN 4250184175940

2018-16-01

Technical Data

General Data

Fields of application

	Office
	Data center
Design	patch panel
Mounting style	1RU
Transmission technology	Fiber optic
Port numbering	yes
Color	green
Dimensions	
Dimension (L x W x H)	244.00 x 482.60 x 44.45 mm
Dimension (L x W x H)	9.606 x 19 x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	244.00 mm
Installation depth	9.606 in.
Number of cables/ cores	12
Cable Type	pigtail(s)
Fiber class	OS2: IEC 60793-2-50 B6_a, B6_b & ITU-T G.657.A, G.652.D
Mode type of the fiber	Single mode
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm
Labeling option	printed numbers

Connections/interfaces

Connector technology interface 1	E2000 Couplers
Connector technology interface 2	E2000 Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 2	12
Number of blind covers interface 2	12
Semi-tight buffered fiber pigtail length	2.00 m
Semi-tight buffered fiber pigtail length	6.56 ft
Semi-tight buffered fiber pigtail diameter	0.90 mm
Semi-tight buffered fiber pigtail diameter	0.035 in.



Data sheet

OpDAT slide patch panel splice 12xE2000 APC (green), OS2, gray

Page 3/5

P/N
1502695912-E
EAN 4250184175940

2018-16-01

Technical Data

Connections/interfaces

Cable access/outlet	several possibilities for cable entry on the back
---------------------	---

Optical characteristics

Insertion loss	max. 0.3 dB
Return loss	min. 65 dB

Mechanical characteristics

Cut-out	SC, LC-D, E2000
Connector type	Simplex
Life - Number of mating cycles	min. 1000
strain relief	yes

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

Environmental conditions

Temperature (min. - max.)	
Temperature - Operating °C	-40 - 85 °C
Temperature - Operating °F	-40 - 185 °F

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-15
Optical fibers: Indoor optical cables	
Sectional specification for class B single-mode fibres	ISO/IEC 60793-2-50 type B6_a/B6_b
Optical fibers - Interconnecting devices and passive components - basic test and measuring methods	
Fibre optic interconnecting devices and passive components	IEC 61300-3-4
Fibre optic interconnecting devices and passive components	IEC 61300-3-6



Data sheet

Page 4/5

OpDAT slide patch panel splice 12xE2000 APC (green), OS2, gray

P/N

1502695912-E

EAN 4250184175940

2018-16-01

Technical Data

The product meets the following standards

Optical fibers - Interconnecting devices and passive components - basic test and measuring methods

Fibre optic interconnecting devices and passive components	IEC 61300-3-35
--	----------------

Standard colours for insulation for low-frequency cables & wires	IEC 60304
--	-----------

ITU-T standard	ITU-T G.657.A compatible with ITU-T G.652.D
----------------	---

Classifications

ETIM 5.0	EC001130
----------	----------

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

Packaging dimension (W x H x D)	400.00 x 400.00 x 400.00 mm
---------------------------------	-----------------------------

Packaging dimension (W x H x D)	15.748 x 15.748 x 15.748 in.
---------------------------------	------------------------------



P | Cabling

Data sheet

OpDAT slide patch panel splice 12xE2000 APC (green), OS2, gray

Page 5/5

P/N

1502695912-E

EAN 4250184175940

2018-16-01

Illustrations

Dimensional drawing

