

Data sheet

Consolidation Point VIK 6xLC-Q OM4 (ceramic, violet)

Page 1/5

P/N

1503007906-E


EAN 4251122197130

2018-13-03

Illustrations



Dimensional drawing

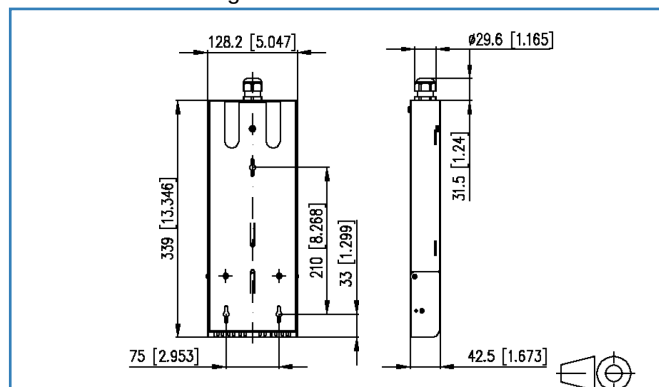

See enlarged drawings at the end of document

Product specification

- Consolidation Point VIK with LC-Q adapters
- To connect pre-terminated installation cables VIK with max. 24 fibers
- Wall-mount powder-coated steel-sheet housing, (white, RAL 9010)
- Patch area with swing-open and removable cover with label field
- Possibility for strain relief for patch cord
- Not used cutouts are closed by blind plugs
- Cable management area with separate cover
- Possible cable entry on the back side for one PG16 cable gland
- If necessary order extensions or reductions for the fixing of the VIKs as separate accessory
- Supplied with material for wall-mounting
- Variants: equipped with 6 LC-Q adapters lime green (OM5), violet (OM4), aqua (OM3), blue (OS2) or green (OS2 APC)



Data sheet

Page 2/5

Consolidation Point VIK 6xLC-Q OM4 (ceramic, violet)

P/N

1503007906-E

EAN 4251122197130

2018-13-03

Technical Data

General Data

Fields of application	Structured building cabling, Office Data center
Transmission technology	Fiber optic
Color	violet
Dimensions	
Dimension (L x W x H)	128.20 x 29.60 x 339.00 mm
Dimension (L x W x H)	5.047 x 1.165 x 13.346 in.
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1	LC-Q Couplers
Connector technology interface 2	LC-Q Couplers
Number of ports interface 1	6
Number of ports interface 2	6
Number of equipped ports interface 1	6
Number of equipped ports interface 2	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6
Cable access/outlet	possibility for cable entry on the back

Mechanical characteristics

Life - Number of mating cycles	min. 1000
--------------------------------	-----------

Materials and material properties

Material - Housing	sheet steel
Material - Housing finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

Approvals

RoHS	compliant
------	-----------



Data sheet

Page 3/5

Consolidation Point VIK 6xLC-Q OM4 (ceramic, violet)

P/N

1503007906-E

EAN 4251122197130

2018-13-03

Technical Data

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-20
----------------------------------	-----------------

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	470.00 x 200.00 x 60.00 mm
Packaging dimension (W x H x D)	18.504 x 7.874 x 2.362 in.



Data sheet

Page 4/5

Consolidation Point VIK 6xLC-Q OM4 (ceramic, violet)

P/N

1503007906-E

EAN 4251122197130

2018-13-03

Accessories

P/N	Designation
15090401-I	OpDAT crimp splice protection (150 pcs)
15090401-E	OpDAT crimp splice protection (12 pcs)
150811P1613-E	Thread reducer PG16 to PG13.5
150811P1611-E	Thread reducer PG16 to PG11
150811P1621-E	Thread enlarger PG16 to PG21



Consolidation Point VIK 6xLC-Q OM4 (ceramic, violet)

P/N

1503007906-E

EAN 4251122197130

2018-13-03

Illustrations

Dimensional drawing

