

Data sheet

OpDAT Wall-mounted distributor S 12xLC-D OM5 (ceramic, lime green), VIK

Page 1/3

P/N

1503207M12-E


EAN 4251394607368

2018-23-02


Illustrations



Dimensional drawing

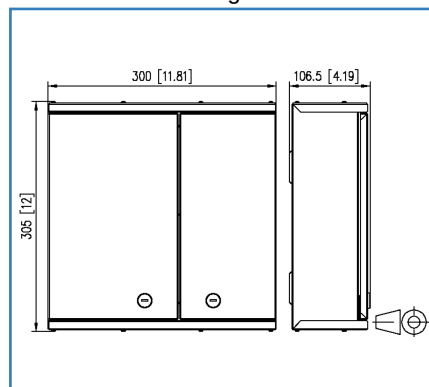

Cut-out

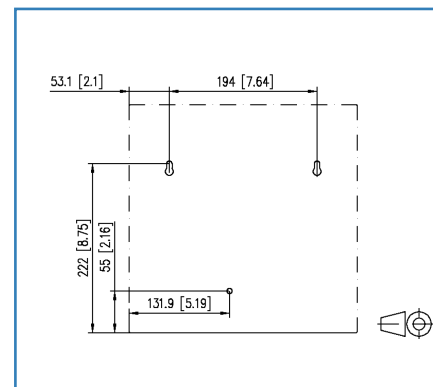

See enlarged drawings at the end of document

Product specification

- Distributor for universal use in floor cabling or as a building distribution point in the equipment room
- Equipped with LC-D adapters
- Unused openings are closed by blind plugs
- Wall-mount housing with two lockable swing doors, two different locks to separate network and building cabling
- Easy, space saving wall mounting
- Easy access possibilities and a secure routing of the VIKs
- four cable infeeds (scope of supply): 1x for VIK with universal cable, 1x for M20/PG16, 2x for patch cords
- Variants: size S: 305x300x107 mm or size M: 405x400x107 mm
- Variants: equipped with up to 48 LC-D adapters in blue (OS2), lime green (OM5), violet (OM4), aqua (OM3) or LC-D APC adapters in green (OS2)



Data sheet

Page 2/3

OpDAT Wall-mounted distributor S 12xLC-D OM5 (ceramic, lime green), VIK

P/N

1503207M12-E

EAN 4251394607368

2018-23-02

Technical Data

General Data

Design	Wall-mounted distributor
Mounting style	surface mount
Transmission technology	Fiber optic
Port numbering	yes
Color	lime green
Dimensions	
Dimension (L x W x H)	106.50 x 300.00 x 305.00 mm
Dimension (L x W x H)	4.193 x 11.811 x 12.008 in.
Fiber class	OM5: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.4
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	printed numbers

Connections/interfaces

Connector technology interface 1	LC-D Couplers
Connector technology interface 2	LC-D Couplers
Number of ports interface 1	24
Number of ports interface 2	24
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12
Cable access/outlet	oben oder unten

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-20
----------------------------------	-----------------

Packing details

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	330.00 x 320.00 x 125.00 mm
Packaging dimension (W x H x D)	12.992 x 12.598 x 4.921 in.

P | Cabling

Data sheet

OpDAT Wall-mounted distributor S 12xLC-D OM5 (ceramic, lime green), VIK

Page 3/3

P/N


1503207M12-E

EAN 4251394607368

2018-23-02

Illustrations

Dimensional drawing

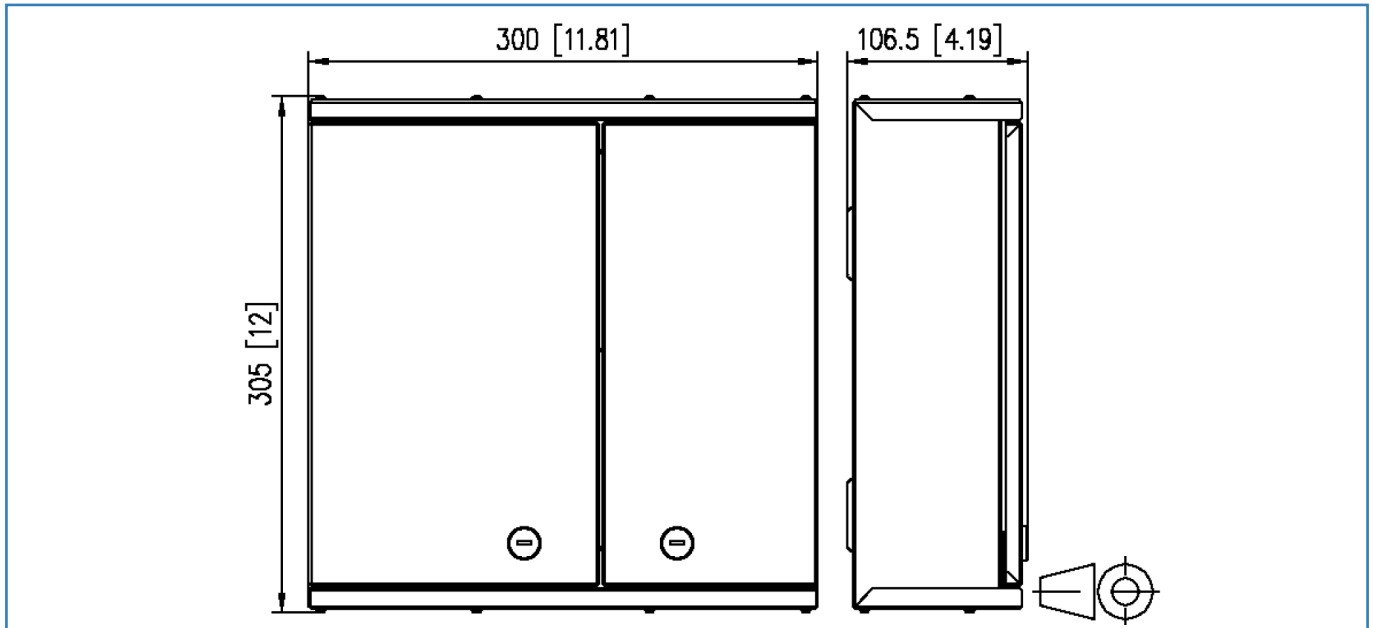

Cut-out

