

OptiSheath® MultiPort Splitter Stubless Terminal SM R7.5 (OS2) - LBL

CORNING

Part Number:
MTS-F844NS000MW-P

The OptiSheath® MultiPort Splitter Terminal is designed for use in outside plant fiber access networks. This innovative terminal provides fast, easy subscriber connections and splitter functionality in one low-profile housing. By enabling incremental subscriber connections, costs are deferred to better match revenue streams. Splitter functionality reduces the distribution cable fiber count requirement, lowering initial cost. The terminal's reliability and flexibility make it the ideal choice for network access point terminals in all-fiber access networks and fiber-to-the-x (FTTx) deployments. The ability to place the splitter in a rugged, modular footprint reduces the complexity of network planning and the number of part numbers required in inventory. The OptiSheath® MultiPort Splitter Stubless Terminal is available in a 4-port (1x4 splitter) and 8-port (1x8 splitter) configuration. It reduces the complexity of network planning and the number of part numbers required in inventory.

Features and Benefits

OptiTap® Single-fiber Connector ports for customer drop terminations


Lower installation costs and faster customer connections

Available with 1x4 or 1x8 splitter

Reduces distribution cable fiber count

Factory-installed and -tested connectors

Reliability and quality assurance

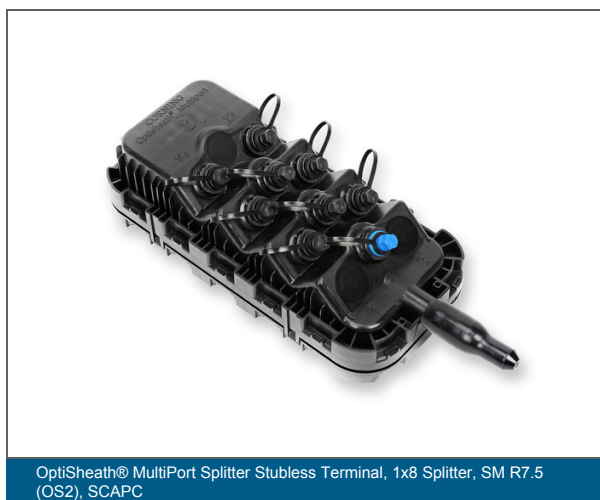

OptiSheath® MultiPort Splitter Stubless Terminal, 1x8 Splitter, SM R7.5 (OS2), SCAPC

OptiSheath® MultiPort Splitter Stubless Terminal SM R7.5 (OS2) - LBL

CORNING

Specifications

General Specifications

Fiber Category	Single-mode (OS2)
Packaging	Individual Pack
Product Type	Splitter multiport

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Common Installations	Splitters meet applicable sections of IEC 61753-1
Design and Test Criteria	Designed and third-party tested to requirements of IEC 61753-101-3

Mechanical Specifications

Splitter Type	1x8, no expansion port
---------------	------------------------

Connector Specs

Connector Type	No connector
----------------	--------------

Shipping Dimensions

Height	762 mm
Width	762 mm
Depth	152 mm

Ordering Information

Product Number	MTS-F844NS000MW-P
EAN Code	4042673586135
Weight	1.68 kg

OptiSheath® MultiPort Splitter Stubless Terminal SM R7.5 (OS2) - LBL

CORNING

Ordering Information

Packaging Method	Box
Units per Delivery	1/1



Corning Comunicacoes Opticas • Estrada do Camorim 633 • Jacarepagua CEP 22780-070 • Rio De Janeiro, RJ Brazil
+55 21 3416 5150 • FAX: +55 21 2441 2037 • www.corning.com/opcomm/csa

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2022 Corning Optical Communications. All rights reserved.