


LSH Simplex E2000/APC Adapter Flangless

FC (Male)-SC (Female)

Unit: mm

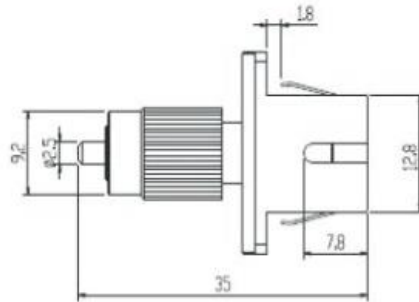

Reference Picture

1. Description

Fibre Optic Hibrid Adapter FC/PC (Male) to SC/PC (Female)

2. Specifications

Item			Parameter
Insertion Loss	Single-Mode	PC	$\leq 0.3\text{dB}$
		UPC	$\leq 0.3\text{dB}$
		APC	$\leq 0.3\text{dB}$
	Multi-Mode		$\leq 0.2\text{dB}$
	Customize		
Return Loss	Single-Mode	PC	$\leq -40\text{dB}$
		UPC	$\leq -50\text{dB}$
		APC	$\leq -60\text{dB}$
			/
	Customize		
Durability		0.2dB Max. Increase	
Operating Temperature		$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$	
Storage Temperature		$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$	
Standard		Compliant with Bellcore GR-326, IEC61754-4, IEC61754-6, IEC61754-13, IEC61754-20, IEC60874-10	
Type		Male to Female hybrid adapter	

Note: 1. All parts compliant with RoHS