

1U Fibre Termination Patch/Splice Panel for 24 SC Simplex or 24 SC Duplex



Characteristics


- 1U 19" Mechanically Sliding type ODF 434 x 44 x 243 mm
- Maximum capacity up to:
 - 24 fibres w/SC Sx Termination or 48 fibres w/LC Dx Termination
 - 48 fibres w/SC Dx Termination or 96 fibres w/LC QUAD Termination
- Available in different models for other types of connectors
- Adjustable depth
- Various cable entry options from the rear side
- Accessories for holding the entry cables and splices Included



Specifications


- Cold Rolled Steel construction
- Durable textured powder coat finish available In black (RAL9005)
- Universal 19" rack compatibility
- Cable Entry 21 mm (2pcs)
- Cable Entry 23 mm (2pcs)

Technical Drawings

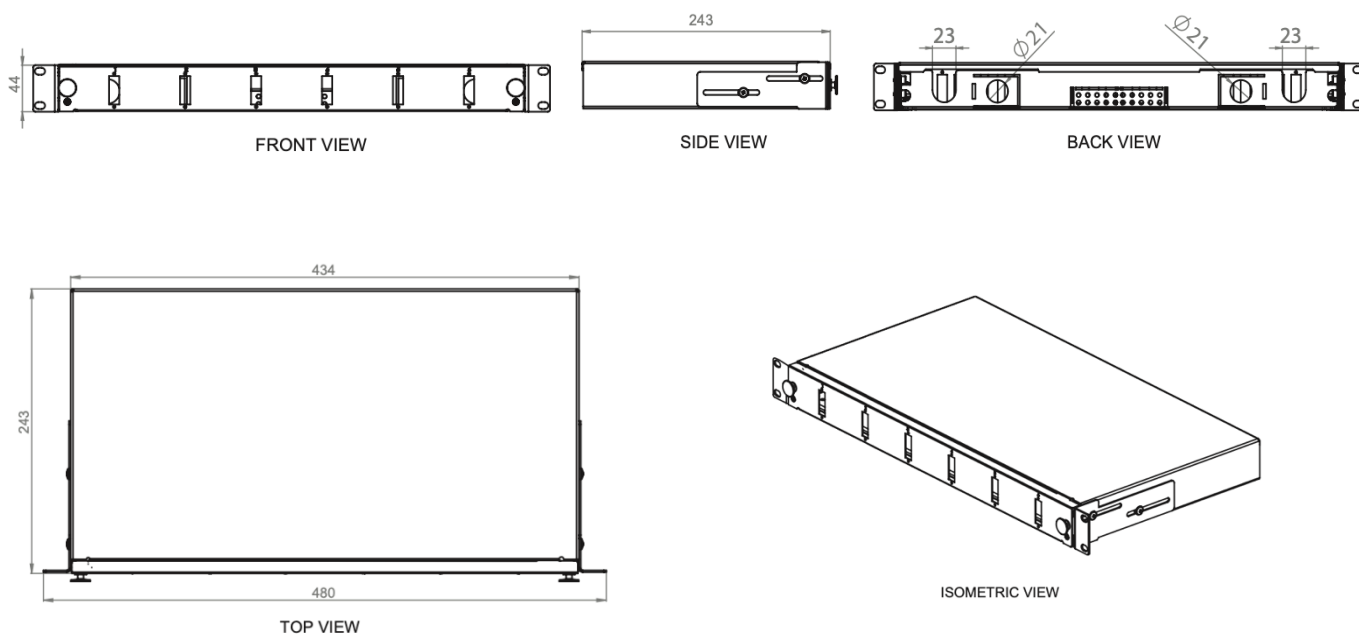


Front Panel Options:


24 SC SX ou 48 LC DX



24 SC DX ou 96 LC QUAD



24 ST ou FC



Included Aecessories:

- 1 cassette for 24 optical fusions
 - (nº of cassettes assembled to the front panel)
- 2 Cable Glands
- 6 Adhesive Bunny clips
- 6 Cable Ties
- Complete securing kit
- 2 Double-sided adhesive strips to secure cassettes
- Blanking plates for SC SX or SC DX



End of technical specification