


FNWLCCLCAF

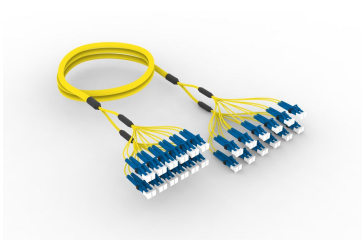

Singlemode LC to LC, InstaPATCH® 360 Ruggedized Fiber Fanout Cable Assembly, 24-Fiber, Low Smoke Zero Halogen (LSZH)

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Ruggedized fanout
Product Brand	SYSTIMAX InstaPATCH® 360
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration Not available in the United States or Canada

General Specifications

Color, boot A	Blue
Color, boot B	Blue
Color, connector A	Blue
Color, connector B	Blue
Construction Type	Stranded
Fibers per Subunit, quantity	12
Furcation Color	Yellow
Interface, Connector A	LC/UPC
Interface, Connector B	LC/UPC
Jacket Color	Yellow
Total Fibers, quantity	24


Dimensions

Cable Assembly Length, minimum (ft)	8
Cable Assembly Length, maximum (ft)	999
Cable Assembly Length, minimum (m)	3

FNWLCCLCAF

Cable Assembly Length, maximum (m) 999

Ordering Tree

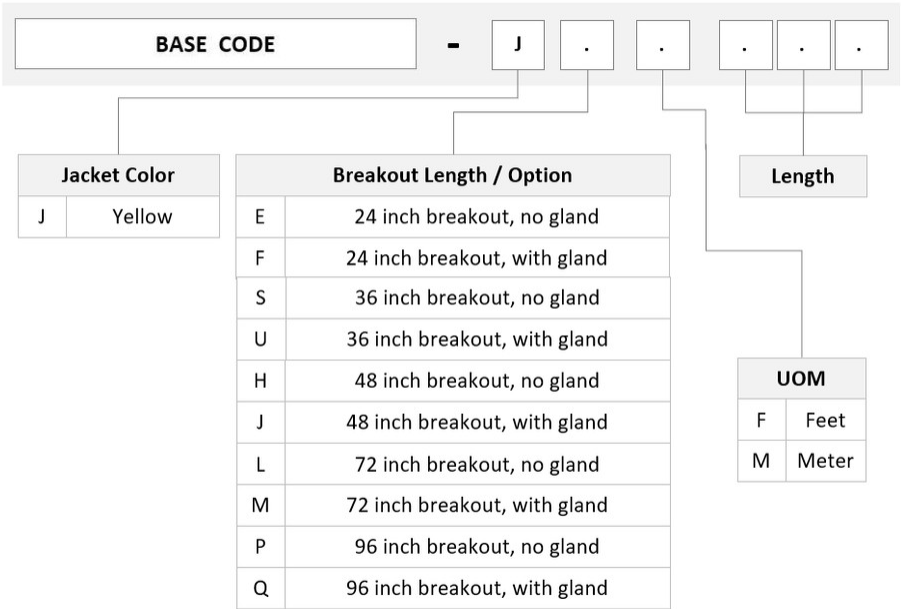

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.652.D | G.657.A1, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

FNWLCLCAF

REACH-SVHC

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS


Compliant



Included Products

760050351 — TeraSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 24 fiber with 12 fiber subunits
N-024-MP-8W-F12YL/D

860637434 — TeraSPEED® Elite LC Connector for 1.6 mm Fiber, single-mode



TeraSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 24 fiber with 12 fiber subunits

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber indoor cable


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Fiber Type, quantity	24
Fibers per Subunit, quantity	12
Jacket Color	Yellow
Subunit Type	Gel-free
Subunit, quantity	2
Total Fiber Count	24

Dimensions

Height Over Jacket	5.2 mm 0.205 in
Width Over Jacket	8.2 mm 0.323 in
Buffer Tube/Subunit Diameter	3 mm 0.118 in

Representative Image

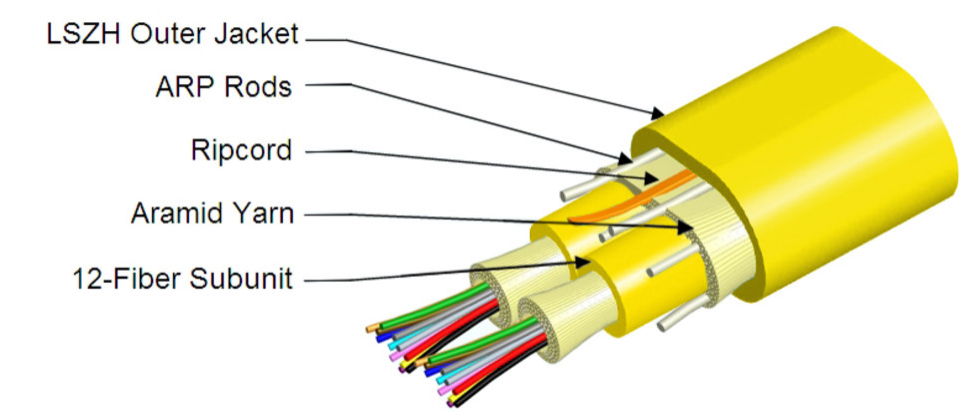

Mechanical Specifications

Minimum Bend Radius, loaded	78 mm 3.071 in
Minimum Bend Radius, unloaded	52 mm 2.047 in
Tensile Load, long term, maximum	200 N 44.962 lbf
Tensile Load, short term, maximum	667 N 149.948 lbf
Compression	10 N/mm 57.101 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	5.88 N-m 52.042 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	491 m 1,610.892 ft

Optical Specifications

Fiber Type	G.652.D and G.657.A1 , TeraSPEED® G.652.D and G.657.A1, TeraSPEED® OS2 OS2
------------	--

Environmental Specifications

760050351 | N-024-MP-8W-F12YL/D

Installation temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
EN50575 CPR Cable EuroClass Fire Performance	Dca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d1
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH) Riser
Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3 IEC 60754-2 IEC 61034-2 IEEE 383 UL 1666 UL 1685

Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	42 kg/km 28.223 lb/kft
---------------------	--------------------------

Regulatory Compliance/Certifications

Agency	Classification
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant



* Footnotes

760050351 | N-024-MP-8W-F12YL/D

Operating Temperature Specification applicable to non-terminated bulk fiber cable

TeraSPEED® Elite LC Connector for 1.6 mm Fiber, single-mode

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber connector
Product Brand	TeraSPEED®

General Specifications

Color	Blue
Ferrule Geometry	Pre-radiused
Interface	LC
Interface Feature	Standard

Dimensions

Length	50.3 mm 1.98 in
Compatible Cable Diameter	1.6 mm 0.063 in

Material Specifications

Ferrule Material	Zirconia
------------------	----------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
-----------------------------------	----------------

Optical Specifications

Fiber Type	G.652.D and G.657.A1 , TeraSPEED® OS2
Optical Components Standard	ANSI/TIA-568-C.3 GR-326-CORE
Insertion Loss, ULL, maximum	0.25 dB
Return Loss, minimum	50 dB

Packaging and Weights

Packaging quantity	1
--------------------	---

Regulatory Compliance/Certifications

860637434

Agency

CHINA-ROHS

ROHS



Classification

Below maximum concentration value

Compliant